

SERVICE MANUAL

W270C / W300C Wheel Loader Tier 4


Print No. 84547255C



Product: New Holland W270C/W300C Tier 4 Wheel Loader Service Repair Manual(84547255C)
Full Download: <https://www.arepairmanual.com/downloads/new-holland-w270c-w300c-tier-4-wheel-loader-service-repair-manual84547255c/>



SERVICE MANUAL

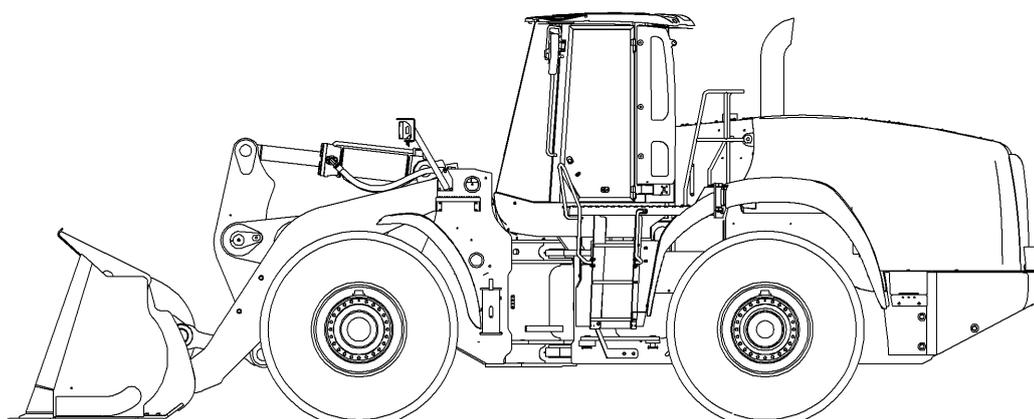

W270C
W300C

Sample of manual. Download All 2289 pages at:

<https://www.arepairmanual.com/downloads/new-holland-w270c-w300c-tier-4-wheel-loader-service-repair-manual84547255c/>

84547255C 15/03/2013

EN

Contents

INTRODUCTION

Engine.....	10
[10.001] Engine and crankcase	10.1
[10.202] Air cleaners and lines	10.2
[10.500] Selective Catalytic Reduction (SCR) exhaust treatment	10.3
[10.400] Engine cooling system	10.4
[10.310] Aftercooler.....	10.5
Transmission.....	21
[21.114] Mechanical transmission	21.1
Four-Wheel Drive (4WD) system	23
[23.314] Drive shaft.....	23.1
Front axle system	25
[25.100] Powered front axle	25.1
Rear axle system.....	27
[27.100] Powered rear axle.....	27.1
Brakes and controls	33
[33.202] Hydraulic service brakes	33.1
[33.110] Parking brake or parking lock	33.2
Hydraulic systems.....	35
[35.000] Hydraulic systems.....	35.1
[35.300] Reservoir, cooler, and filters.....	35.2
[35.106] Variable displacement pump	35.3
[35.525] Auxiliary hydraulic valves and lines	35.4
[35.701] Front loader arm hydraulic system	35.5
[35.723] Front loader bucket hydraulic system	35.6
Frames and ballasting	39

[39.100] Frame	39.1
Steering	41
[41.101] Steering control	41.1
[41.200] Hydraulic control components.....	41.2
[41.216] Cylinders	41.3
[41.910] Auxiliary steering	41.4
Wheels	44
[44.511] Front wheels.....	44.1
Cab climate control	50
[50.200] Air conditioning.....	50.1
Electrical systems	55
[55.000] Electrical system	55.1
[55.100] Harnesses and connectors.....	55.2
[55.015] Engine control system.....	55.3
[55.201] Engine starting system	55.4
[55.301] Alternator.....	55.5
[55.302] Battery.....	55.6
[55.202] Cold start aid	55.7
[55.011] Fuel tank system	55.8
[55.988] Selective Catalytic Reduction (SCR) electrical system	55.9
[55.012] Engine cooling system	55.10
[55.024] Transmission control system.....	55.11
[55.519] Cab brake controls	55.12
[55.030] Service brake electrical system	55.13
[55.031] Parking brake electrical system	55.14
[55.512] Cab controls.....	55.15
[55.035] Remote control valve electric control	55.16
[55.036] Hydraulic system control	55.17

[55.051] Cab Heating, Ventilation, and Air-Conditioning (HVAC) controls.....	55.18
[55.050] Heating, Ventilation, and Air-Conditioning (HVAC) control system.....	55.19
[55.047] Steering control system	55.20
[55.524] Cab controls (Lift arm, Boom, Dipper, Bucket).....	55.21
[55.415] Loader arm and bucket control system	55.22
[55.530] Camera.....	55.23
[55.518] Wiper and washer system.....	55.24
[55.404] External lighting	55.25
[55.405] External lighting switches and relays	55.26
[55.514] Cab lighting	55.27
[55.510] Cab or platform harnesses and connectors.....	55.28
[55.408] Warning indicators, alarms, and instruments	55.29
[55.DTC] FAULT CODES.....	55.30
Booms, dippers, and buckets	84
[84.100] Bucket.....	84.1
Platform, cab, bodywork, and decals	90
[90.150] Cab.....	90.1
[90.151] Cab interior.....	90.2
[90.114] Operator protections	90.3



INTRODUCTION

Contents

INTRODUCTION

International symbols – Conversion factors	3
Torque	5
Basic instructions	9
Torque – Drive shafts, center bearing, and universal joints	11
Capacities	12
W270C	
Capacities	13
W300C	
General specification	14

International symbols – Conversion factors

Metric to U.S.

	Multiply	By	To obtain
Area	Sq. meter	10.763 91	Square foot
	Hectare	2.471 05	Acre
Force	Newton	3.596 942	Ounce force
	Newton	0.224 809	Pound force
Length	Millimeter	0.039 370	Inch
	Meter	3.280 840	Foot
	Kilometer	0.621 371	Mile
Mass	Kilogram	2.204 622	Pound
Mass/Area	Kilogram/hectare	0.000 466	Ton/acre
Mass/Energy	gr/kW/hr.	0.001 644	lbs/hp/hr.
Mass/Volume	Kg/cubic meter	1.685 555	lb/cubic yd.
Power	Kilowatt	1.341 02	Horsepower
Pressure	Kilopascal	0.145 038	lb/sq. inch
	Bar	14.50385	lb/sq. inch
Temperature	Degree C	1.8 x C +32	Degree F
Torque	Newton meter	8.850 748	lb/inch
	Newton meter	0.737 562	lb/foot
Velocity	Kilometer/hr.	0.621 371	Miles/hr.
Volume	Cubic centimeter	0.061 024	Cubic inch
	Cubic meter	35.314 66	Cubic foot
	Cubic meter	1.307 950	Cubic yd.
	Milliliter	0.033 814	Ounce (US fluid)
	Litre	1.056 814	Quart (US liquid)
	Litre	0.879 877	Quart (Imperial)
	Litre	0.264 172	Gallon (US liquid)
	Litre	0.219 969	Gallon (Imperial)
Volume/time	Litre/min.	0.264 172	Gallon/min. (US liquid)
	Litre/min.	0.219 969	Gallon/min. (Imperial)

U.S. to Metric

	Multiply	By	To obtain
Are	Square foot	0.092 903	Square meter
	Acre	0.404 686	Hectare
Force	Ounce force	0.278 014	Newton
	Pound force	4.448 222	Newton
Length	Inch	25.4 *	Millimeter
	Foot	0.304 8 *	Meter
	Mile	1.609 344 *	Kilometer
Mass	Pound	0.453 592	Kilogram
	Ounce	28.35	Gram
Mass/Area	Ton/acre	2241 702	Kilogram/hectare
Mass/Energy	lb/hp/hr	608.277 4	gr/kW/hr
Mass/Volume	lb/cubic yd.	0.593 276	kg/cubic meter
Power	Horsepower	0.745 700	Kilowatt
Pressure	lbs/sq. in.	6.894 757	Kilopascal
	lbs/sq. in.	0.069	Bar
	lbs/sq. in.	0.070 303	Kg/sq. cm
Temperature	Degree F	1.8 F - 32	Degree C
Torque	Pound/inch	0.112 985	Newton meter
	Pound/foot	1.355 818	Newton meter
Velocity	Miles/hr.	1.609 344 *	Kilometer/hr.

INTRODUCTION

	Multiply	By	To obtain
Volume	Cubic inch	16.387 06	Cubic centimeter
	Cubic foot	0.028 317	Cubic meter
	Cubic yard	0.764.555	Cubic meter
	Ounce (US fluid)	29.573 53	Milliliter
	Quart (US liquid)	0.946 353	Litre
	Quart (Imperial)	1.136 523	Litre
	Gallon (US)	3.785 412	Litre
	Gallons (Imperial)	4.546 092	Litre
Volume/time:	Gallon/min.	3.785 412	Litre/min.

* = exact

Torque

Decimal hardware

Use the torques in this chart when special torques are not given. These torques apply to fasteners with both **UNC** and **UNF** threads as received from suppliers dry, or when lubricated with engine oil. Not applicable if special graphities, Molydisulfide greases, or other extreme pressure lubricants are used.

Grade 5 Bolts, Nuts and Studs	
	
1/4 in	12 - 15 N·m (106 - 133 lb in)
5/16 in	23 - 28 N·m (204 - 248 lb in)
3/8 in	48 - 57 N·m (425 - 504 lb in)
7/16 in	73 - 87 N·m (54 - 64 lb ft)
1/2 in	109 - 130 N·m (80 - 96 lb ft)
9/16 in	149 - 179 N·m (110 - 132 lb ft)
5/8 in	203 - 244 N·m (150 - 180 lb ft)
3/4 in	366 - 439 N·m (270 - 324 lb ft)
7/8 in	542 - 651 N·m (400 - 480 lb ft)
1.0 in	787 - 944 N·m (580 - 696 lb ft)
1-1/8 in	1085 - 1193 N·m (800 - 880 lb ft)
1-1/4 in	1519 - 1681 N·m (1120 - 1240 lb ft)
1-3/8 in	1980 - 2278 N·m (1460 - 1680 lb ft)
1-1/2 in	2631 - 2983 N·m (1941 - 2200 lb ft)

Grade 8 Bolts, Nuts and Studs	
	
1/4 in	16 - 20 N·m (142 - 177 lb in)
5/16 in	33 - 39 N·m (292 - 345 lb in)
3/8 in	61 - 73 N·m (540 - 646 lb in)
7/16 in	95 - 114 N·m (70 - 84 lb ft)
1/2 in	149 - 179 N·m (110 - 132 lb ft)
9/16 in	217 - 260 N·m (160 - 192 lb ft)
5/8 in	298 - 358 N·m (220 - 264 lb ft)
3/4 in	515 - 618 N·m (380 - 456 lb ft)
7/8 in	814 - 976 N·m (600 - 720 lb ft)
1.0 in	1220 - 1465 N·m (900 - 1081 lb ft)
1-1/8 in	1736 - 1953 N·m (1280 - 1440 lb ft)
1-1/4 in	2468 - 2712 N·m (1820 - 2000 lb ft)
1-3/8 in	3227 - 3688 N·m (2380 - 2720 lb ft)
1-1/2 in	4285 - 4827 N·m (3160 - 3560 lb ft)

NOTE: Use thick nuts with Grade 8 bolts.

Metric hardware

Use the following torques when specifications are not given.

These values apply to fasteners with coarse threads as received from supplier, plated or unplated, or when lubricated with engine oil. These values do not apply if graphite or Molydisulfide grease or oil is used.

Grade 8.8 Bolts, Nuts and Studs	
	
M4	3 - 4 N·m (27 - 35 lb in)
M5	7 - 8 N·m (62 - 71 lb in)
M6	11 - 12 N·m (97 - 106 lb in)
M8	26 - 31 N·m (230 - 274 lb in)
M10	52 - 61 N·m (460 - 540 lb in)
M12	90 - 107 N·m (66 - 79 lb ft)
M14	144 - 172 N·m (106 - 127 lb ft)
M16	217 - 271 N·m (160 - 200 lb ft)
M20	434 - 515 N·m (320 - 380 lb ft)
M24	675 - 815 N·m (498 - 601 lb ft)
M30	1250 - 1500 N·m (922 - 1106 lb ft)
M36	2175 - 2600 N·m (1604 - 1918 lb ft)

Grade 10.9 Bolts, Nuts, and Studs	
	
M4	4 - 5 N·m (35 - 44 lb in)
M5	9 - 11 N·m (80 - 97 lb in)
M6	15 - 18 N·m (133 - 159 lb in)
M8	37 - 43 N·m (327 - 381 lb in)
M10	73 - 87 N·m (54 - 64 lb ft)
M12	125 - 150 N·m (92 - 111 lb ft)
M14	200 - 245 N·m (148 - 181 lb ft)
M16	310 - 380 N·m (229 - 280 lb ft)
M20	610 - 730 N·m (450 - 538 lb ft)
M24	1050 - 1275 N·m (774 - 940 lb ft)
M30	2000 - 2400 N·m (1475 - 1770 lb ft)
M36	3500 - 4200 N·m (2581 - 3098 lb ft)

Grade 12.9 Bolts, Nuts and Studs



Usually the torque values specified for grade 10.9 fasteners can be used satisfactorily on grade 12.9 fasteners.

Steel hydraulic fittings

37°flare fitting		
Tube OD hose ID	Thread size	Torque
6.4 mm (0.25 in)	7/16-20	8 - 16 N·m (71 - 142 lb in)
7.9 mm (0.31 in)	1/2-20	11 - 22 N·m (97 - 195 lb in)
9.5 mm (0.37 in)	9/16-18	14 - 34 N·m (124 - 300 lb in)
12.7 mm (0.50 in)	3/4-16	20 - 57 N·m (177 - 504 lb in)
15.9 mm (0.63 in)	7/8-14	34 - 79 N·m (301 - 699 lb in)
19.0 mm (0.75 in)	1-1/16-12	54 - 108 N·m (40 - 80 lb ft)
22.2 mm (0.87 in)	1-3/16-12	81 - 135 N·m (60 - 100 lb ft)
25.4 mm (1.00 in)	1-5/16-12	102 - 158 N·m (75 - 117 lb ft)
31.8 mm (1.25 in)	1-5/8-12	169 - 223 N·m (125 - 164 lb ft)
38.1 mm (1.50 in)	1-7/8-12	285 - 338 N·m (210 - 249 lb ft)

Split flange mounting bolts	
Size	Torque
5/16-18	20 - 27 N·m (177 - 239 lb in)
3/8-16	27 - 34 N·m (239 - 301 lb in)
7/16-14	47 - 61 N·m (416 - 540 lb in)
1/2-13	74 - 88 N·m (55 - 65 lb ft)
5/8-11	190 - 203 N·m (140 - 150 lb ft)

Straight threads with O-ring		
Tube OD hose ID	Thread size	Torque
6.4 mm (0.25 in)	7/16-20	16 - 26 N·m (142 - 230 lb in)
7.9 mm (0.31 in)	1/2-20	22 - 34 N·m (195 - 301 lb in)
9.5 mm (0.37 in)	9/16-18	34 - 54 N·m (301 - 478 lb in)
12.7 mm (0.50 in)	3/4-16	57 - 91 N·m (504 - 805 lb in)
15.9 mm (0.63 in)	7/8-14	79 - 124 N·m (699 - 1097 lb in)
19.0 mm (0.75 in)	1-1/16-12	108 - 174 N·m (80 - 128 lb ft)
22.2 mm (0.87 in)	1-3/16-12	136 - 216 N·m (100 - 159 lb ft)
25.4 mm (1.00 in)	1-5/16-12	159 - 253 N·m (117 - 187 lb ft)
31.8 mm (1.25 in)	1-5/8-12	224 - 357 N·m (165 - 263 lb ft)
38.1 mm (1.50 in)	1-7/8-12	339 - 542 N·m (250 - 400 lb ft)

Steel hydraulic fittings

O-ring face seal end				O-ring boss end fitting or lock nut	
Nom. SAE dash size	Tube OD	Thread size	Torque	Thread size	Torque
-4	6.4 mm (0.25 in)	9/16-18	14 - 16 N·m (124 - 142 lb in)	7/16-20	23 - 27 N·m (204 - 239 lb in)
-6	9.5 mm (0.37 in)	11/16-16	24 - 27 N·m (212 - 239 lb in)	9/16-18	34 - 41 N·m (301 - 363 lb in)
-8	12.7 mm (0.50 in)	13/16-16	43 - 54 N·m (381 - 478 lb in)	3/4-16	61 - 68 N·m (540 - 602 lb in)
-10	15.9 mm (0.63 in)	1-14	62 - 76 N·m (549 - 673 lb in)	7/8-14	81 - 88 N·m (60 - 65 lb ft)
-12	19 mm (0.75 in)	1-3/16-12	90 - 110 N·m (66 - 81 lb ft)	1-1/16-12	115 - 122 N·m (85 - 90 lb ft)
-14	22.2 mm (0.87 in)	1-3/16-12	90 - 110 N·m (66 - 81 lb ft)	1-3/16-12	129 - 135 N·m (95 - 100 lb ft)
-16	25.4 mm (1.00 in)	1-7/16-12	125 - 140 N·m (92 - 103 lb ft)	1-5/16-12	156 - 169 N·m (115 - 125 lb ft)
-20	31.8 mm (1.25 in)	1-11/16-12	170 - 190 N·m (125 - 140 lb ft)	1-5/8-12	203 - 217 N·m (150 - 160 lb ft)
-24	38.1 mm (1.50 in)	2-12	200 - 254 N·m (148 - 187 lb ft)	1-7/8-12	258 - 271 N·m (190 - 200 lb ft)

Basic instructions

Coolant solution

Put only ethylene-glycol coolant solution in the cooling system. Use good quality ethylene-glycol that has a high boiling point with no additives to prevent leakage. Do not use non-approved anti-rust additives. Anti-rust additives and ethylene-glycol can mix and work against each other, reducing anti-corrosion protection, forming deposits in the cooling system, and causing damage to the cooling system and radiator. Contact your Dealer who can supply you with the suitable coolant solution.

Anti-freeze/Anti-corrosion

Use anti-freeze in all seasons to protect the cooling system from corrosion and risk of freezing. For areas where the ambient temperature is over **-36 °C (-32.8 °F)** use a blend of 50% ethylene-glycol based anti-freeze.

For areas where the temperature is below **-36 °C (-32.8 °F)** - it is advisable to use a blend of 40% water and 60% anti-freeze.

Fuel

Use diesel fuel suitable for the ambient temperature conditions (**ASTM D975**).

Use fuel which is to **ASTM** (American Society for Testing and Materials) **D975** standard (North America). In Europa, fuel must comply with specification standard **EN 590** or ITS EQUIVALENT.

Use grade No. 2 fuel. The use of other types of fuel can result in a loss of power of the engine and may cause high fuel consumption.

In very low ambient temperatures, use a mixture of fuels No. 1 and No. 2 as necessary. Consult your fuel supplier for appropriate fuel supply.

If the temperature falls below the fuel cloud point (point at which wax begins to form) the wax crystals will cause power loss or will prevent the engine from starting.

In cold weather, fill the fuel tank at the end of the day's work in order to prevent the formation of condensation.

Engine oil

NEW HOLLAND AMBRA UNITEK CJ-4 ENGINE OIL SAE 15W-40 is recommended for your engine. This oil insures correct lubrication of your engine in all working conditions. See **General specification ()** to choose the correct oil for climate/temperatures.

If **NEW HOLLAND AMBRA UNITEK CJ-4 ENGINE OIL SAE 15W-40** cannot be obtained, use only oil of the **API CI4** category.

NOTE: Do not put any performance additive or other additive in the sump. Oil change intervals shown in this manual are based on tests carried out utilizing **NEW HOLLAND CONSTRUCTION** lubricants.



LEL112WL30004AA 1

Fuel storage

Prolonged storage of fuel can lead to the accumulation of impurities and condensation in the fuel. Engine trouble can often be traced to the presence of water in the fuel.

The storage tank must be placed outside and the temperature of the fuel should be kept as low as possible. Drain off water and impurities regularly.

Hydraulic fluid

NEW HOLLAND AMBRA HYDROSYSTEM 46 HV is specifically designed for high pressure applications and for NEW HOLLAND CONSTRUCTION hydraulic systems. Your NEW HOLLAND CONSTRUCTION Dealer can provide hydraulic fluid to fulfill different climate/temperature conditions. Refer to the **General specification ()**.

Transmission component oil

Extreme pressure oil should be used for enclosed transmission components. Choose an oil that is manufactured for your climate/temperature conditions such as **NEW HOLLAND AMBRA MULTI G 134™ HYDRAULIC TRANSMISSION OIL**. See **General specification ()**.

Grease

The type of grease to use depends on ambient temperature such as: **NEW HOLLAND AMBRA GR 75 MD**.

Environment

Before you service this machine and dispose of oil, fluids, and lubricants, obey environmental regulations. Do not drain oil or fluids on to the ground or into containers that leak. Check with your local environmental, recycling center or your Dealer for correct disposal information.

Torque – Drive shafts, center bearing, and universal joints

Center, rear and front drive shaft bolts
Lock nut for yoke on front drive shaft

136 - 149 N·m (100 - 110 lb ft)
339 - 373 N·m (250 - 275 lb ft)

Capacities

W270C

Engine	
Type of oil	NEW HOLLAND AMBRA UNITEK CJ-4 ENGINE OIL SAE 15W-40
Capacity (with filter change)	28.5 l (30.1 US qt)
Cooling system	
System capacity	56.8 l (60.0 US qt)
Fuel system	
System capacity	473.0 l (125.0 US gal)
Hydraulic system	
Type of fluid	NEW HOLLAND AMBRA HYDROSYSTEM 46 HV
Total system capacity	250 l (66.0 US gal)
Reservoir capacity	134 l (35.4 US gal)
Transmission	
Type of oil	NEW HOLLAND AMBRA MULTI G™ HYDRAULIC TRANSMISSION OIL
Service capacity - with filter change	45.4 l (48.0 US qt)
Axles	
Type of oil	NEW HOLLAND AMBRA MULTI G™ HYDRAULIC TRANSMISSION OIL
Front axle STD	42 l (44.4 US qt)
Rear axle STD	42 l (44.4 US qt)
Front axle HD	62 l (65.5 US qt)
Rear axle HD	65.7 l (69.4 US qt)
Tank urea (AD Blue)	
Type of fluid	DEF/AdBLUE® (Spec ES-B5001)
Capacity	91 l (96.2 US qt)

Capacities


W300C

Capacities and specifications

Engine	
Type of oil	NEW HOLLAND AMBRA UNITEK CJ-4 ENGINE OIL SAE 15W-40
Capacity (with filter change)	28.5 l (30.1 US qt)
Cooling system	
System capacity	56.8 l (60 US qt)
Fuel system	
System capacity	473 l (125 US gal)
Hydraulic system	
Type of fluid	NEW HOLLAND AMBRA HYDROSYSTEM 46 HV
Total system capacity	250 l (66 US gal)
Reservoir capacity	134 l (35.4 US gal)
Transmission	
Type of oil	NEW HOLLAND AMBRA MULTI G 134™ HYDRAULIC TRANSMISSION OIL
Service capacity - with filter change	45.4 l (48 US qt)
Axles	
Type of oil	NEW HOLLAND AMBRA MULTI G 134™ HYDRAULIC TRANSMISSION OIL
Front axle STD	64.0 l (67.6 US qt)
Rear axle STD	64.0 l (67.6 US qt)
Front axle HD	62 l (65.5 US qt)
Rear axle HD	65.7 l (69.4 US qt)
Tank Urea (AD Blue)	
Type of fluid	DEF/AdBLUE® (Spec ES-B5001)
Capacity	91 l (96 US qt)


General specification

Hydraulic oil temperature chart

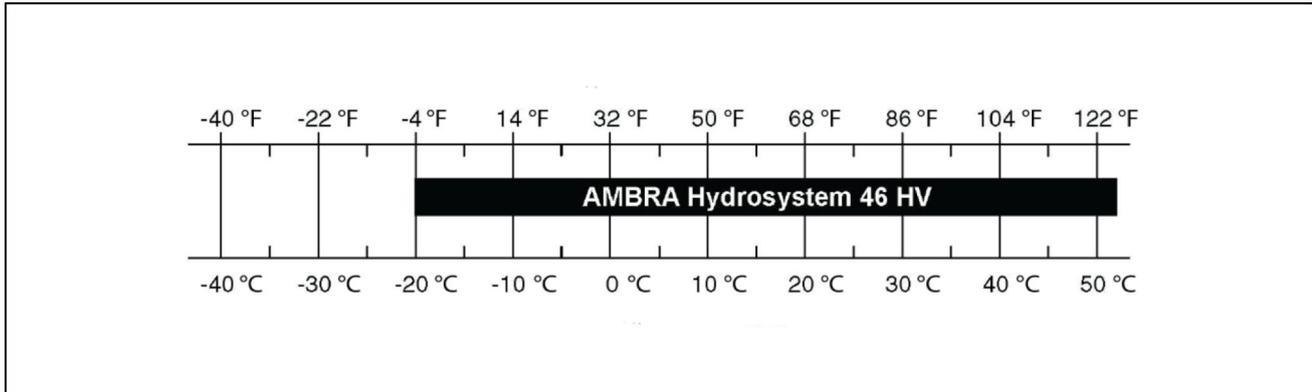


LEIL12WL30001EA 1

Transmission oil temperature chart

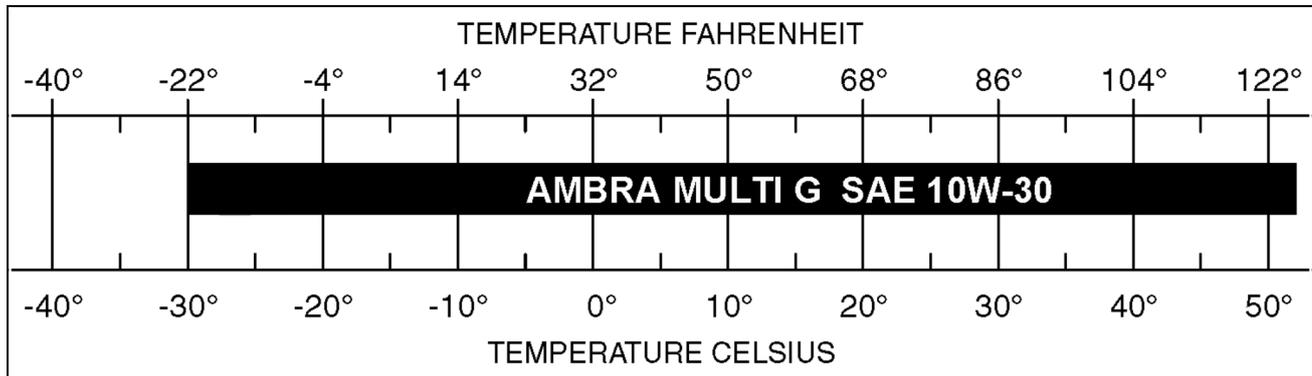

LEIL12WHL0011BA 2

Engine oil temperature chart

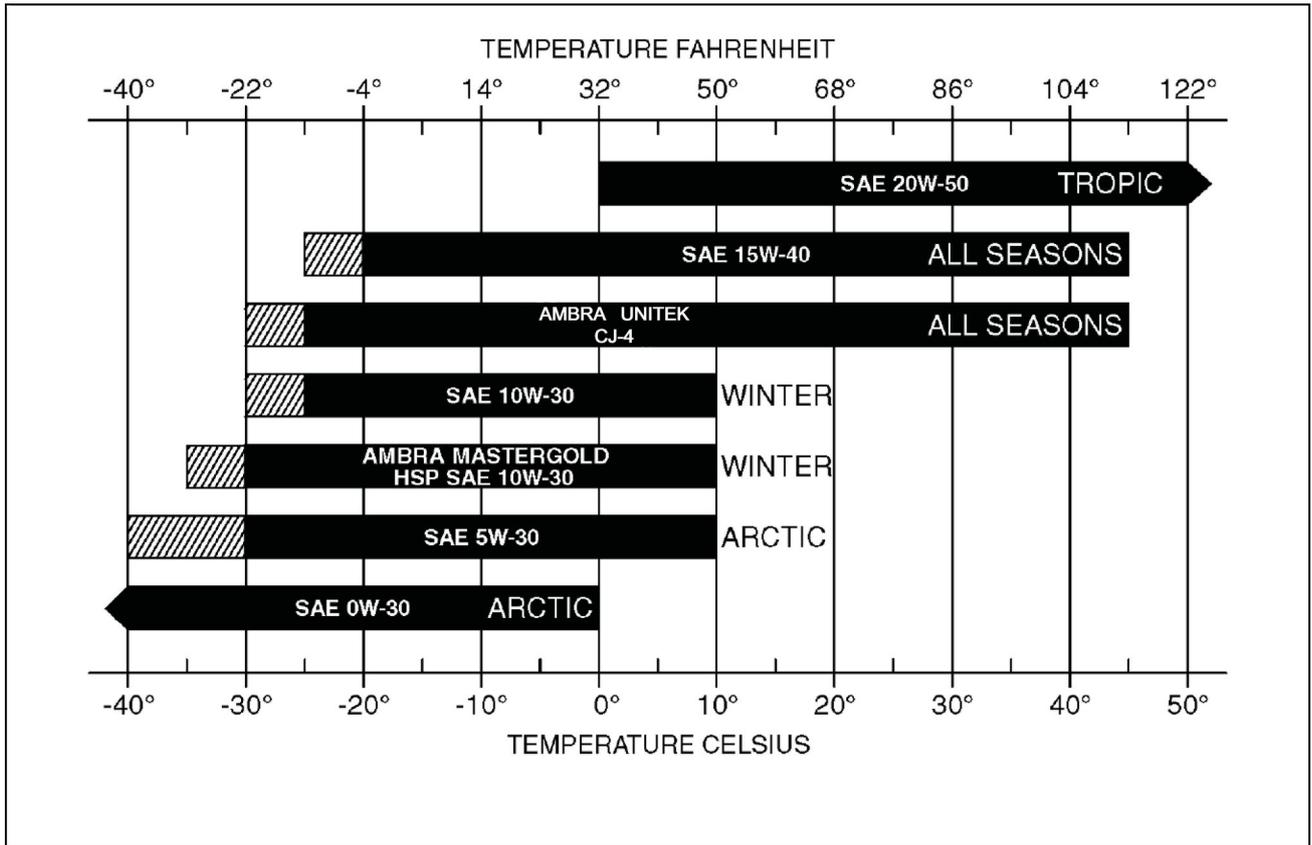


LEIL12WHL0018BA 3



SERVICE MANUAL

Engine

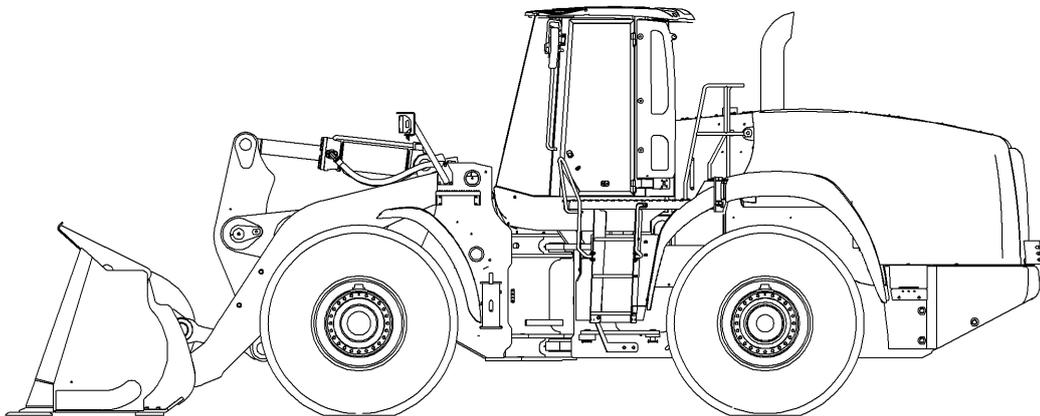

W270C
W300C

Contents

Engine - 10

[10.001] Engine and crankcase	10.1
W270C , W300C	
[10.202] Air cleaners and lines	10.2
W270C , W300C	
[10.500] Selective Catalytic Reduction (SCR) exhaust treatment.....	10.3
W270C , W300C	
[10.400] Engine cooling system	10.4
W270C , W300C	
[10.310] Aftercooler.....	10.5
W270C , W300C	



Engine - 10

Engine and crankcase - 001

**W270C
W300C**

Contents

Engine - 10

Engine and crankcase - 001

TECHNICAL DATA

Engine	
General specification	3

FUNCTIONAL DATA

Engine	
Overview – Stall tests	4

SERVICE

Engine	
Remove – Engine	6
Install	16
Prepare – Stall tests	25
Prepare – Stall tests - Heat the oil (torque converter)	26
Prepare – Stall tests - Heat the oil (hydraulic system)	27
Service instruction – Stall tests (power mode selection)	28
Test – Stall tests	29

Engine - General specification

		Engine W/4 speed trans.
A.	Idle RPM	870 - 930 RPM
	Alternate low idle	570 - 630 RPM
	Alternate accelerated idle	1170 - 1230 RPM
B.	Maximum no load	2162 - 2212 RPM
C.	Converter stall	1 st gear 1970 RPM - 2 nd /4 th gear 2075 RPM
D.	Hydraulic stall	1885 - 2195 RPM
E.	Converter & hydraulic stall	1665 RPM

NOTE: Hydraulic stall and converter & hydraulic stall RPM values are read while the lift arms are rising with the bucket held rolled back and the engine at WOT in max power mode.


Engine - Overview – Stall tests

Instrument cluster displays

1. With the engine running, press the up or down key and scroll through the information screens and trip screens. The following sequence is using the down key only.

NOTE: Pressing the escape key will return the LCD back to the normal driving screen.

2. From the driving screen push the down arrow, as shown.

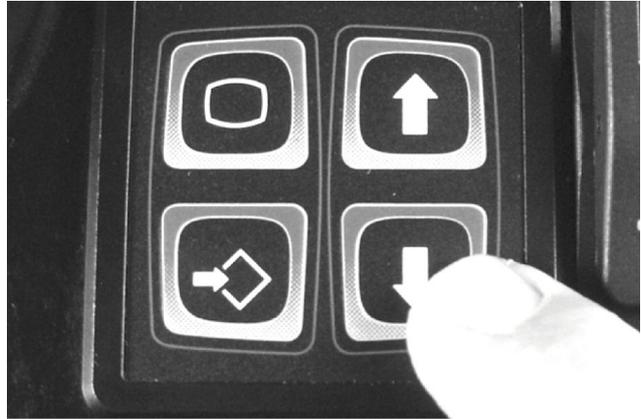

LEPH12WL30050AA 1

3. "Info 1" is the first information screen using the down arrow from the driving screen. It displays engine RPM's, speed, fuel level, and the Urea level.

i	Info	1
<hr/>		
Engine RPM	1623	
Speed KPH	11.9	
Fuel Lvl %	19	
DefLvl %	32	


LEL12WL30051AA 2

4. "Info 2" will be displayed next. The "Info 2" screen will display coolant temperature, turbocharger air temperature, engine oil temperature in either Fahrenheit or Celsius, and the Urea level.

i	Info	2
<hr/>		
Coolant °C	31	
Eng Oil °C	85	
OilPressBAR	3.2	
DefLvl %	32	


LEL12WL30052AA 3

5. Push the down button again and the "Info 3" screen. This screen displays the temperature in Fahrenheit or Celsius of the transmission oil, hydraulic oil, sump oil, and the Urea level.

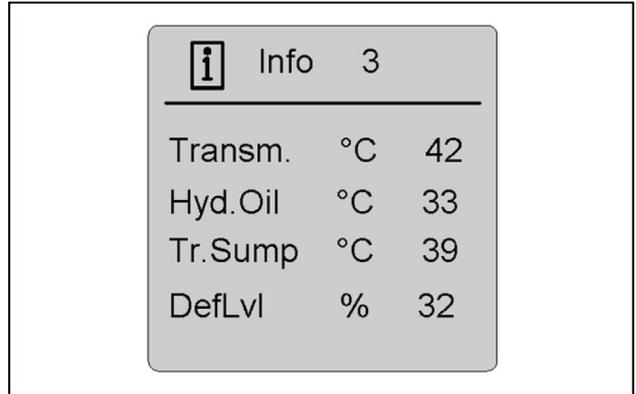


LEL112WL30053AA 4

6. Push the down key again to display the "info 4" screen. This screen display the voltage level, turbocharger air temperature, Urea temperature and Urea level.

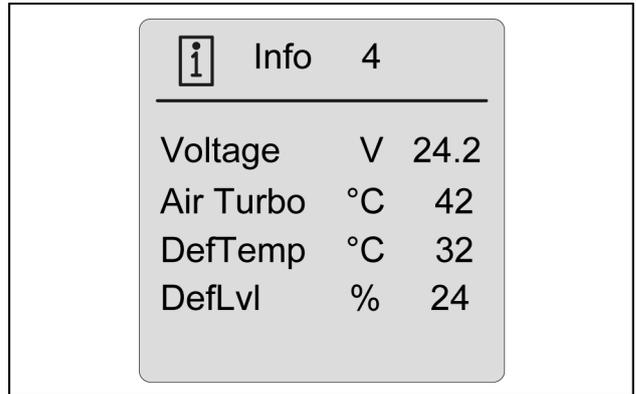


LEL112WL30054AA 5

7. Press the down button again and the "Trip 1" screen will display. The LCD provides two trip computers. These will display since last reset the total time in hours, the total fuel, and the average fuel consumption per hour.

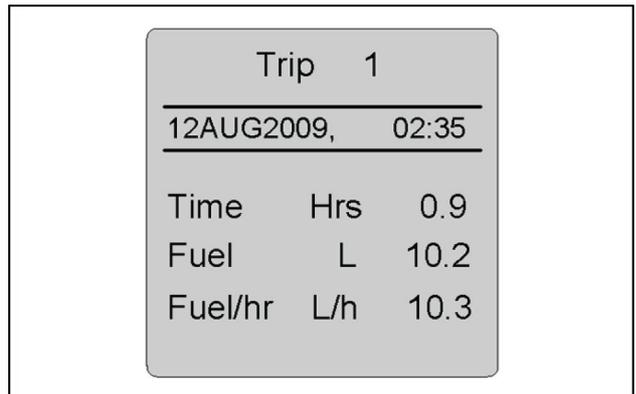

LEL112WL30055AA 6

8. By continuing to scroll down, the fifth screen will display the "Trip 2" screen. "Trip 1" and "Trip 2" screens can be reset independently. The previous screen can be accessed by using the up arrow key.

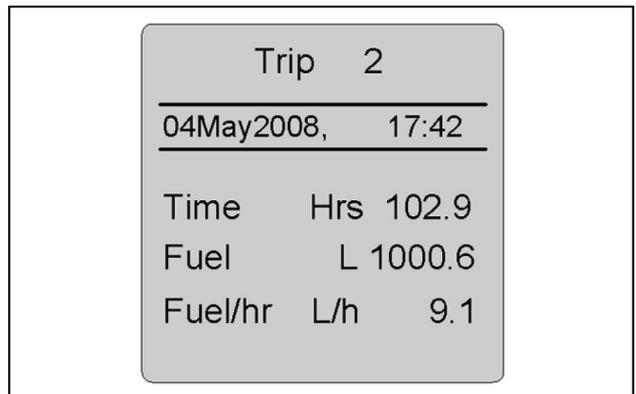


LEL112WL30056AA 7


Engine - Remove – Engine

NOTE: Put caps on the fittings and plugs in the hoses to prevent foreign material from entering the system when disconnecting fuel lines or hydraulic hoses.


1. Park the machine on a level surface and lower the bucket to the ground. Put the articulation lock **(1)** in the LOCKED position.
2. Key in the RUN position, engine Off, place the pilot control switch in the normal OPERATION position.
3. Move the loader hydraulic control handle to the raise and lower position in order to release any hydraulic pressure in the lift circuit.
4. Move the loader control handle in and out of the tilt position several times, this will relieve any pressure in the pilot accumulator.
5. Release the pressure in the ride control accumulator with the bleeder valve in the ride control valve.
6. Depress the brake pedal several times to discharge brake accumulators.
7. Slowly loosen the filler cap on the hydraulic oil tank to release air pressure.
8. Put the master disconnect switch **(1)** in the "OFF" position.
9. Drain the engine radiator coolant.
10. Drain the engine oil.
11. Loosen the hose clamp **(1)** on the air box snorkel under the air inlet hood.

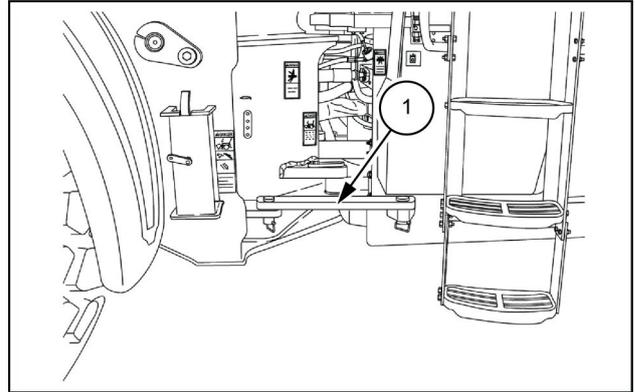

LEL112WL30005AB 1

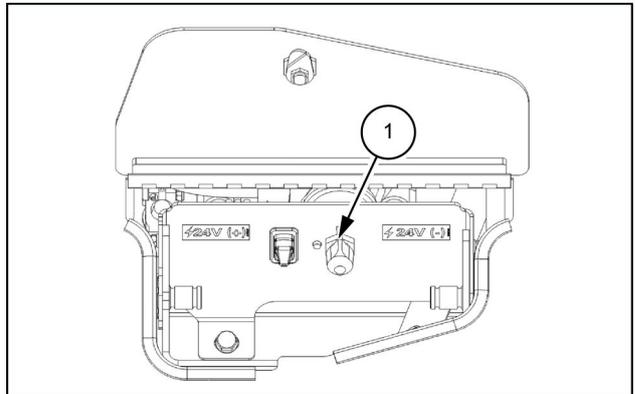


LEL112WL30006AB 2

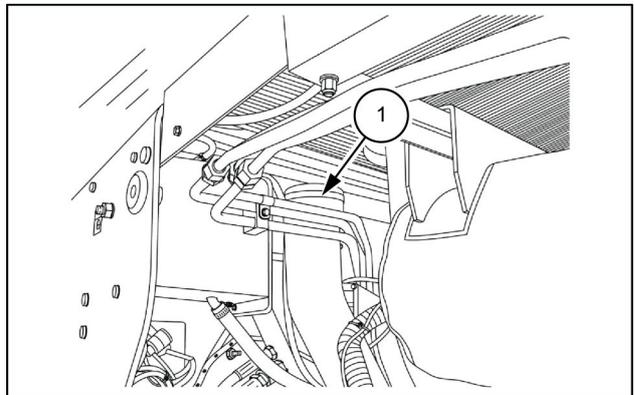


LEL112WL30007AB 3

12. Remove the mounting bolts on the exhaust stack hood. Attach lifting equipment to the exhaust stack. Remove the exhaust stack hood (1).

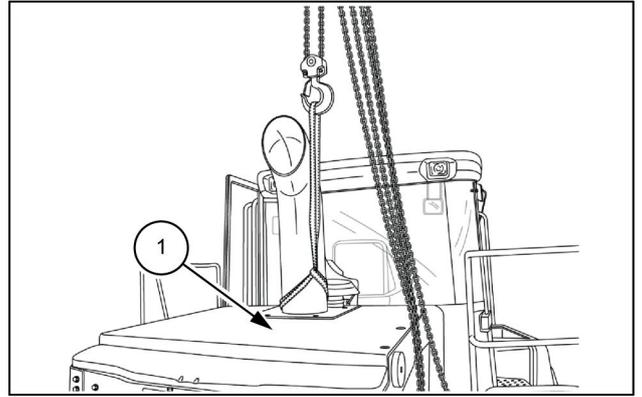


LELI12WL30008AB 4

13. Remove the SCR line support bracket (1).

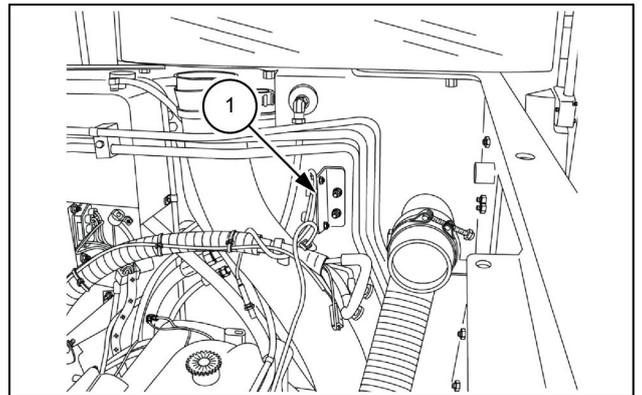


LELI12WL30009AB 5

14. Disconnect the deaeration tank overflow hose (2). Remove the P-clamps (1) that secure the overflow hose to the wall and brackets. Position the overflow hose away from the engine and engine wall.

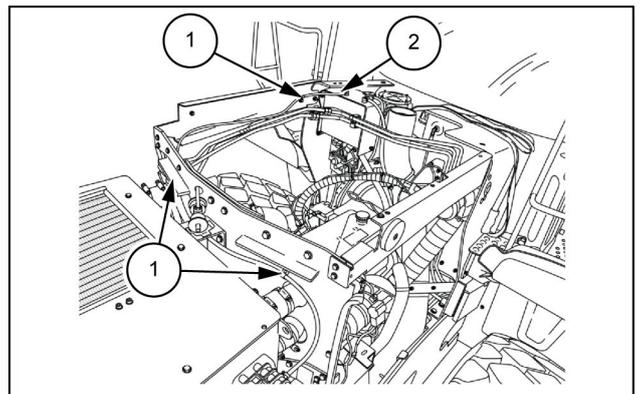

LELI12WL30010AB 6

15. Remove the left bracket (1) and right bracket (2).

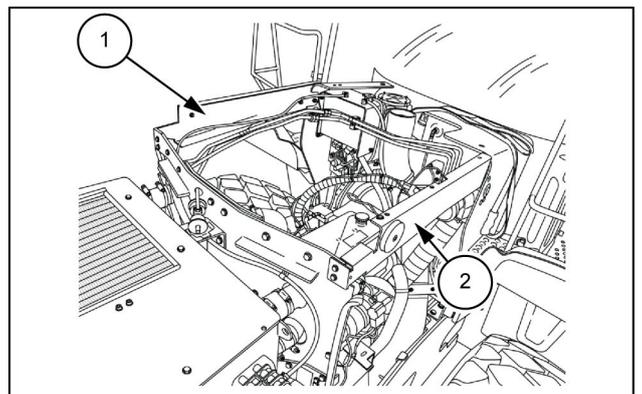

LELI12WL30011AB 7