

SERVICE MANUAL

F140B VHP **F170B VHP** **F200B VHP** Motor Graders

Part Number
48050427D
4th Edition
English 10/2017





SERVICE MANUAL

F140B Torque converter transmission, Tier 3, made in Brazil [NAAF08001 -]
F170B Direct drive transmission, Tier 3, made in Brazil [HBZN0170HBAF00360 -]
F170B Torque converter transmission, Tier 3, made in Brazil [NAAF09000 -]
F200B Direct drive transmission, Tier 3, made in Brazil [NAAF11000 -]
F200B Torque converter transmission, Tier 3, made in Brazil [HBZN0200TBAF00511 -]

Link Product / Engine

Product	Market Product	Engine
F140B Transmissão do conversor de torque, Tier 3, produzido no Brasil [NAAF08001 -]	Australia New Zealand	F4HE9687W*J101
F140B Transmissão do conversor de torque, Tier 3, produzido no Brasil [NAAF08001 -]	Middle East Africa	F4HE9687W*J101
F140B Transmissão do conversor de torque, Tier 3, produzido no Brasil [NAAF08001 -]	Asia Pacific	F4HE9687W*J101
F170B Transmissão de acionamento direto, Tier 3, produzido no Brasil [HBZN0170HBAF00360 -]	Australia New Zealand	F4HE9687C*J100
F170B Transmissão de acionamento direto, Tier 3, produzido no Brasil [HBZN0170HBAF00360 -]	Middle East Africa	F4HE9687C*J100
F170B Transmissão de acionamento direto, Tier 3, produzido no Brasil [HBZN0170HBAF00360 -]	Asia Pacific	F4HE9687C*J100
F170B Transmissão do conversor de torque, Tier 3, produzido no Brasil [NAAF09000 -]	Middle East Africa	F4HE9687C*J100
F170B Transmissão do conversor de torque, Tier 3, produzido no Brasil [NAAF09000 -]	Asia Pacific	F4HE9687C*J100
F170B Transmissão do conversor de torque, Tier 3, produzido no Brasil [NAAF09000 -]	Australia New Zealand	F4HE9687C*J100
F200B Transmissão de acionamento direto, Tier 3, produzido no Brasil [NAAF11000 -]	Asia Pacific	F4HE9684L*J100
F200B Transmissão de acionamento direto, Tier 3, produzido no Brasil [NAAF11000 -]	Middle East Africa	F4HE9684L*J100
F200B Transmissão de acionamento direto, Tier 3, produzido no Brasil [NAAF11000 -]	Australia New Zealand	F4HE9684L*J100
F200B Transmissão do conversor de torque, Tier 3, produzido no Brasil [HBZN0200TBAF00511 -]	Australia New Zealand	F4HE9687K*J105
F200B Transmissão do conversor de torque, Tier 3, produzido no Brasil [HBZN0200TBAF00511 -]	Asia Pacific	F4HE9687K*J105
F200B Transmissão do conversor de torque, Tier 3, produzido no Brasil [HBZN0200TBAF00511 -]	Middle East Africa	F4HE9687K*J105

Contents

INTRODUCTION

Transmission	21
[21.113] Powershift transmission	21.1
[21.135] Powershift transmission external controls.....	21.2
[21.105] Powershift transmission hydraulic components.....	21.3
[21.155] Powershift transmission internal components.....	21.4
[21.700] Torque converter	21.5
[21.900] Hydraulic pump drive.....	21.6
Front axle system	25
[25.400] Non-powered front axle	25.1
Rear axle system	27
[27.100] Powered rear axle.....	27.1
[27.106] Rear bevel gear set and differential.....	27.2
[27.120] Planetary and final drives	27.3
Brakes and controls	33
[33.110] Parking brake or parking lock	33.1
Hydraulic systems	35
[35.000] Hydraulic systems.....	35.1
Frames and ballasting	39
[39.100] Frame	39.1
[39.140] Ballasts and supports	39.2
Steering	41
[41.200] Hydraulic control components.....	41.1
Cab climate control	50
[50.100] Heating	50.1
[50.104] Ventilation	50.2

[50.200] Air conditioning	50.3
Electrical systems	55
[55.000] Electrical system	55.1
[55.100] Harnesses and connectors	55.2
[55.201] Engine starting system	55.3
[55.301] Alternator	55.4
[55.302] Battery	55.5
[55.010] Fuel injection system	55.6
[55.024] Transmission control system	55.7
[55.051] Cab Heating, Ventilation, and Air-Conditioning (HVAC) controls	55.8
[55.050] Heating, Ventilation, and Air-Conditioning (HVAC) control system	55.9
[55.020] Transmission speed sensors	55.10
[55.DTC] FAULT CODES	55.11
Dozer blade and arm	86
[86.110] Dozer blade	86.1
Tools	89
[89.128] Ripper assembly	89.1



INTRODUCTION

Contents

INTRODUCTION

Safety rules - Batteries (*)	3
Variable displacement pump - Safety rules (*)	5
Torque - Minimum tightening torques for normal assembly (*)	6
Maintenance chart and Lubrication (*)	11
Maintenance chart and Lubrication (*)	13
Maintenance chart and Lubrication (*)	15
Consumables (*)	17
Consumables (*)	19
Consumables (*)	21
Conversion factors (*)	23

(*) See content for specific models

Safety rules - Batteries

F140B	ANZ --- APAC --- MEA
F170B	ANZ --- APAC --- MEA
F200B	ANZ --- APAC --- MEA

⚠ WARNING

Improper operation or service of this machine can result in an accident.
 Before working on any component(s) of the electrical circuit, put the starter switch key in the off (shut down) position. When disconnecting batteries, always disconnect the negative (-) cable first. When reconnecting batteries, always connect the negative (-) cable last.
 Failure to comply could result in death or serious injury.

W0264A

⚠ WARNING

Electrical shock hazard!
 Before working on any part of the electrical system, disconnect the battery ground cable. Complete all electrical work before connecting the cable.
 Failure to comply could result in death or serious injury.

W0129A

⚠ WARNING

Battery gas can explode!
 To prevent an explosion: 1. Always disconnect the negative (-) battery cable first. 2. Always connect the negative (-) battery cable last. 3. Do not short circuit the battery posts with metal objects. 4. Do not weld, grind, or smoke near a battery.
 Failure to comply could result in death or serious injury.

W0011A

⚠ WARNING

Explosion hazard!
 When jump-starting the machine, connect and disconnect the jumper cables exactly as indicated in this manual. DO NOT connect the jumper cables to the machine battery terminals. Make sure no persons are near the connecting points before starting the engine. Start the engine from the operator's seat.
 Failure to comply could result in death or serious injury.

W0342A

⚠ WARNING

Explosive gas!
 Batteries emit explosive hydrogen gas and other fumes while charging. Ventilate the charging area. Keep the battery away from sparks, open flames, and other ignition sources. Never charge a frozen battery.
 Failure to comply could result in death or serious injury.

W0005A

⚠ WARNING

Hazardous chemicals!
 Battery electrolyte contains sulfuric acid. Contact with skin and eyes could result in severe irritation and burns. Always wear splash-proof goggles and protective clothing (gloves and aprons). Wash hands after handling.
 Failure to comply could result in death or serious injury.

W0006A

⚠ WARNING

Battery gas can explode!

To prevent an explosion: 1. Always disconnect the negative (-) battery cable first. 2. Always connect the negative (-) battery cable last. 3. Do not short circuit the battery posts with metal objects. 4. Do not weld, grind, or smoke near a battery.

Failure to comply could result in death or serious injury.

W0011A

⚠ WARNING

Explosion hazard!

If battery electrolyte is frozen, attempting to charge the battery or jump-start the engine can cause the battery to explode. Always keep batteries at full charge to prevent frozen battery electrolyte. Never charge a frozen battery.

Failure to comply could result in death or serious injury.

W0203A

⚠ WARNING

Improper operation or service of this machine can result in an accident.

An error connecting auxiliary starting cables or short-circuiting battery terminals can cause an accident. Connect auxiliary starting cables as instructed in this manual.

Failure to comply could result in death or serious injury.

W0263A

⚠ WARNING

Explosion hazard!

Batteries emit explosive gases. Always ventilate when using in an enclosed area or when charging. Keep the battery away from sparks, open flames, and other ignition sources.

Failure to comply could result in death or serious injury.

W0369A

⚠ WARNING

Eye injury hazard!

Wear eye protection when jump-starting the machine and when charging the battery.

Failure to comply could result in death or serious injury.

W0382A

⚠ WARNING

Chemical hazard!

Battery acid can cause severe burns. Some batteries have a ventilation tube. If there is battery acid in the tube, this acid can be released when the battery is turned upside down. If you turn the battery upside down, point the ventilation tube away from you and any other people in the area.

Failure to comply could result in death or serious injury.

W1084A

Variable displacement pump - Safety rules

F140B	ANZ --- APAC --- MEA
F170B	ANZ --- APAC --- MEA
F200B	ANZ --- APAC --- MEA

Personal safety



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible death or injury.

Throughout this manual and on machine safety signs, you will find the signal words DANGER, WARNING, and CAUTION followed by special instructions. These precautions are intended for the personal safety of you and those working with you.

Read and understand all the safety messages in this manual before you operate or service the machine.

 DANGER indicates a hazardous situation that, if not avoided, will result in death or serious injury. The color associated with DANGER is RED.

 WARNING indicates a hazardous situation that, if not avoided, could result in death or serious injury. The color associated with WARNING is ORANGE.

 CAUTION indicates a hazardous situation that, if not avoided, could result in minor or moderate injury. The color associated with CAUTION is YELLOW.

FAILURE TO FOLLOW DANGER, WARNING, AND CAUTION MESSAGES COULD RESULT IN DEATH OR SERIOUS INJURY.

Machine safety

NOTICE: Notice indicates a situation that, if not avoided, could result in machine damage or property damage. The color associated with Notice is BLUE.

Throughout this manual you will find the signal word Notice followed by special instructions to prevent machine damage or property damage. The word Notice is used to address practices not related to personal safety.

Information

NOTE: Note indicates additional information that clarifies steps, procedures, or other information in this manual.

Throughout this manual you will find the word Note followed by additional information about a step, procedure, or other information in the manual. The word Note is not intended to address personal safety or property damage.

Torque - Minimum tightening torques for normal assembly

F140B	ANZ --- APAC --- MEA
F170B	ANZ --- APAC --- MEA
F200B	ANZ --- APAC --- MEA

METRIC NON-FLANGED HARDWARE

NOM. SIZE	CLASS 8.8 BOLT and CLASS 8 NUT		CLASS 10.9 BOLT and CLASS 10 NUT		LOCKNUT CL.8 W/CL8.8 BOLT	LOCKNUT CL.10 W/CL10.9 BOLT
	UNPLATED	PLATED W/ZnCr	UNPLATED	PLATED W/ZnCr		
M4	2.2 N·m (19 lb in)	2.9 N·m (26 lb in)	3.2 N·m (28 lb in)	4.2 N·m (37 lb in)	2 N·m (18 lb in)	2.9 N·m (26 lb in)
M5	4.5 N·m (40 lb in)	5.9 N·m (52 lb in)	6.4 N·m (57 lb in)	8.5 N·m (75 lb in)	4 N·m (36 lb in)	5.8 N·m (51 lb in)
M6	7.5 N·m (66 lb in)	10 N·m (89 lb in)	11 N·m (96 lb in)	15 N·m (128 lb in)	6.8 N·m (60 lb in)	10 N·m (89 lb in)
M8	18 N·m (163 lb in)	25 N·m (217 lb in)	26 N·m (234 lb in)	35 N·m (311 lb in)	17 N·m (151 lb in)	24 N·m (212 lb in)
M10	37 N·m (27 lb ft)	49 N·m (36 lb ft)	52 N·m (38 lb ft)	70 N·m (51 lb ft)	33 N·m (25 lb ft)	48 N·m (35 lb ft)
M12	64 N·m (47 lb ft)	85 N·m (63 lb ft)	91 N·m (67 lb ft)	121 N·m (90 lb ft)	58 N·m (43 lb ft)	83 N·m (61 lb ft)
M16	158 N·m (116 lb ft)	210 N·m (155 lb ft)	225 N·m (166 lb ft)	301 N·m (222 lb ft)	143 N·m (106 lb ft)	205 N·m (151 lb ft)
M20	319 N·m (235 lb ft)	425 N·m (313 lb ft)	440 N·m (325 lb ft)	587 N·m (433 lb ft)	290 N·m (214 lb ft)	400 N·m (295 lb ft)
M24	551 N·m (410 lb ft)	735 N·m (500 lb ft)	762 N·m (560 lb ft)	1016 N·m (750 lb ft)	501 N·m (370 lb ft)	693 N·m (510 lb ft)


NOTE: M4 through M8 hardware torque specifications are shown in pound-inches. M10 through M24 hardware torque specifications are shown in pound-feet.

METRIC FLANGED HARDWARE

NOM. SIZE	CLASS 8.8 BOLT and CLASS 8 NUT		CLASS 10.9 BOLT and CLASS 10 NUT		LOCKNUT CL.8 W/CL8.8 BOLT	LOCKNUT CL.10 W/CL10.9 BOLT
	UNPLATED	PLATED W/ZnCr	UNPLATED	PLATED W/ZnCr		
M4	2.4 N·m (21 lb in)	3.2 N·m (28 lb in)	3.5 N·m (31 lb in)	4.6 N·m (41 lb in)	2.2 N·m (19 lb in)	3.1 N·m (27 lb in)
M5	4.9 N·m (43 lb in)	6.5 N·m (58 lb in)	7.0 N·m (62 lb in)	9.4 N·m (83 lb in)	4.4 N·m (39 lb in)	6.4 N·m (57 lb in)
M6	8.3 N·m (73 lb in)	11 N·m (96 lb in)	12 N·m (105 lb in)	16 N·m (141 lb in)	7.5 N·m (66 lb in)	11 N·m (96 lb in)
M8	20 N·m (179 lb in)	27 N·m (240 lb in)	29 N·m (257 lb in)	39 N·m (343 lb in)	18 N·m (163 lb in)	27 N·m (240 lb in)
M10	40 N·m (30 lb ft)	54 N·m (40 lb ft)	57 N·m (42 lb ft)	77 N·m (56 lb ft)	37 N·m (27 lb ft)	53 N·m (39 lb ft)
M12	70 N·m (52 lb ft)	93 N·m (69 lb ft)	100 N·m (74 lb ft)	134 N·m (98 lb ft)	63 N·m (47 lb ft)	91 N·m (67 lb ft)
M16	174 N·m (128 lb ft)	231 N·m (171 lb ft)	248 N·m (183 lb ft)	331 N·m (244 lb ft)	158 N·m (116 lb ft)	226 N·m (167 lb ft)
M20	350 N·m (259 lb ft)	467 N·m (345 lb ft)	484 N·m (357 lb ft)	645 N·m (476 lb ft)	318 N·m (235 lb ft)	440 N·m (325 lb ft)
M24	607 N·m (447 lb ft)	809 N·m (597 lb ft)	838 N·m (618 lb ft)	1118 N·m (824 lb ft)	552 N·m (407 lb ft)	

IDENTIFICATION


Metric Hex head and carriage bolts, classes 5.6 and up

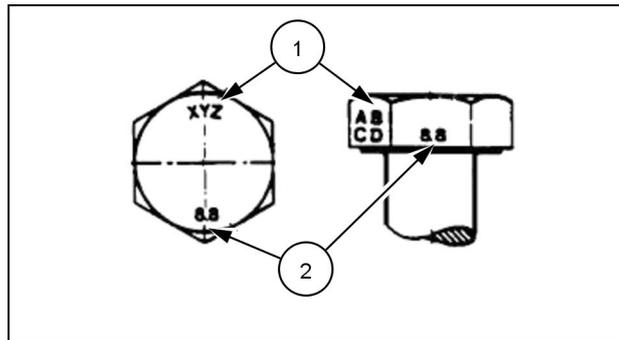

20083680 1

1. Manufacturer's Identification
2. Property Class

Metric Hex nuts and locknuts, classes 05 and up

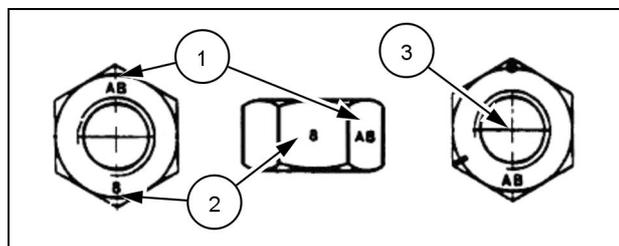

20083681 2

1. Manufacturer's Identification
2. Property Class
3. Clock Marking of Property Class and Manufacturer's Identification (Optional), i.e. marks **60°** apart indicate Class 10 properties, and marks **120°** apart indicate Class 8.

INCH NON-FLANGED HARDWARE

NOMINAL SIZE	SAE GRADE 5 BOLT and NUT		SAE GRADE 8 BOLT and NUT		LOCKNUT GrB W/ Gr5 BOLT	LOCKNUT GrC W/ Gr8 BOLT
	UN-PLATED or PLATED SILVER	PLATED W/ZnCr GOLD	UN-PLATED or PLATED SILVER	PLATED W/ZnCr GOLD		
1/4	8 N·m (71 lb in)	11 N·m (97 lb in)	12 N·m (106 lb in)	16 N·m (142 lb in)	8.5 N·m (75 lb in)	12.2 N·m (109 lb in)
5/16	17 N·m (150 lb in)	23 N·m (204 lb in)	24 N·m (212 lb in)	32 N·m (283 lb in)	17.5 N·m (155 lb in)	25 N·m (220 lb in)
3/8	30 N·m (22 lb ft)	40 N·m (30 lb ft)	43 N·m (31 lb ft)	57 N·m (42 lb ft)	31 N·m (23 lb ft)	44 N·m (33 lb ft)
7/16	48 N·m (36 lb ft)	65 N·m (48 lb ft)	68 N·m (50 lb ft)	91 N·m (67 lb ft)	50 N·m (37 lb ft)	71 N·m (53 lb ft)
1/2	74 N·m (54 lb ft)	98 N·m (73 lb ft)	104 N·m (77 lb ft)	139 N·m (103 lb ft)	76 N·m (56 lb ft)	108 N·m (80 lb ft)
9/16	107 N·m (79 lb ft)	142 N·m (105 lb ft)	150 N·m (111 lb ft)	201 N·m (148 lb ft)	111 N·m (82 lb ft)	156 N·m (115 lb ft)
5/8	147 N·m (108 lb ft)	196 N·m (145 lb ft)	208 N·m (153 lb ft)	277 N·m (204 lb ft)	153 N·m (113 lb ft)	215 N·m (159 lb ft)
3/4	261 N·m (193 lb ft)	348 N·m (257 lb ft)	369 N·m (272 lb ft)	491 N·m (362 lb ft)	271 N·m (200 lb ft)	383 N·m (282 lb ft)
7/8	420 N·m (310 lb ft)	561 N·m (413 lb ft)	594 N·m (438 lb ft)	791 N·m (584 lb ft)	437 N·m (323 lb ft)	617 N·m (455 lb ft)
1	630 N·m (465 lb ft)	841 N·m (620 lb ft)	890 N·m (656 lb ft)	1187 N·m (875 lb ft)	654 N·m (483 lb ft)	924 N·m (681 lb ft)


NOTE: For Imperial Units, 1/4 in and 5/16 in hardware torque specifications are shown in pound-inches. 3/8 in through 1 in hardware torque specifications are shown in pound-feet.

INCH FLANGED HARDWARE

NOM- INAL SIZE	SAE GRADE 5 BOLT and NUT		SAE GRADE 8 BOLT and NUT		LOCKNUT GrF W/ Gr5 BOLT	LOCKNUT GrG W/ Gr8 BOLT
	UNPLATED or PLATED SILVER	PLATED W/ZnCr GOLD	UNPLATED or PLATED SILVER	PLATED W/ZnCr GOLD		
1/4	9 N·m (80 lb in)	12 N·m (106 lb in)	13 N·m (115 lb in)	17 N·m (150 lb in)	8 N·m (71 lb in)	12 N·m (106 lb in)
5/16	19 N·m (168 lb in)	25 N·m (221 lb in)	26 N·m (230 lb in)	35 N·m (310 lb in)	17 N·m (150 lb in)	24 N·m (212 lb in)
3/8	33 N·m (25 lb ft)	44 N·m (33 lb ft)	47 N·m (35 lb ft)	63 N·m (46 lb ft)	30 N·m (22 lb ft)	43 N·m (32 lb ft)
7/16	53 N·m (39 lb ft)	71 N·m (52 lb ft)	75 N·m (55 lb ft)	100 N·m (74 lb ft)	48 N·m (35 lb ft)	68 N·m (50 lb ft)
1/2	81 N·m (60 lb ft)	108 N·m (80 lb ft)	115 N·m (85 lb ft)	153 N·m (113 lb ft)	74 N·m (55 lb ft)	104 N·m (77 lb ft)
9/16	117 N·m (86 lb ft)	156 N·m (115 lb ft)	165 N·m (122 lb ft)	221 N·m (163 lb ft)	106 N·m (78 lb ft)	157 N·m (116 lb ft)
5/8	162 N·m (119 lb ft)	216 N·m (159 lb ft)	228 N·m (168 lb ft)	304 N·m (225 lb ft)	147 N·m (108 lb ft)	207 N·m (153 lb ft)
3/4	287 N·m (212 lb ft)	383 N·m (282 lb ft)	405 N·m (299 lb ft)	541 N·m (399 lb ft)	261 N·m (193 lb ft)	369 N·m (272 lb ft)
7/8	462 N·m (341 lb ft)	617 N·m (455 lb ft)	653 N·m (482 lb ft)	871 N·m (642 lb ft)	421 N·m (311 lb ft)	594 N·m (438 lb ft)
1	693 N·m (512 lb ft)	925 N·m (682 lb ft)	979 N·m (722 lb ft)	1305 N·m (963 lb ft)	631 N·m (465 lb ft)	890 N·m (656 lb ft)

IDENTIFICATION

Inch Bolts and free-spinning nuts

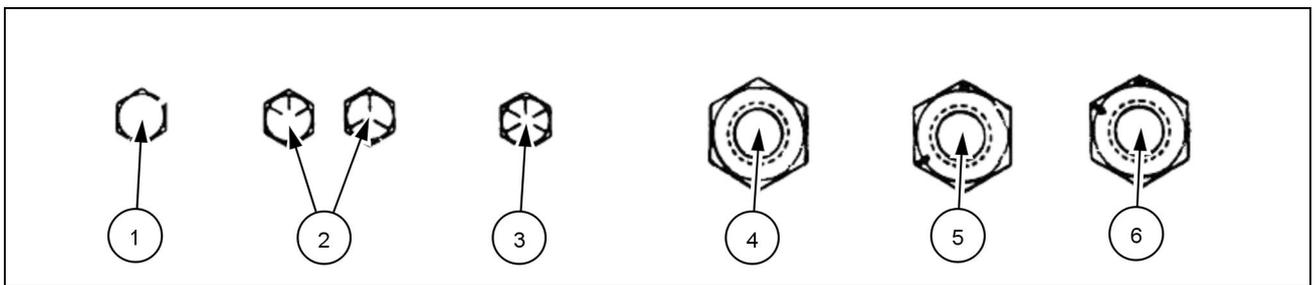


20083682 3

Grade Marking Examples

SAE Grade Identification			
1	Grade 2 - No Marks	4	Grade 2 Nut - No Marks
2	Grade 5 - Three Marks	5	Grade 5 Nut - Marks 120° Apart
3	Grade 8 - Five Marks	6	Grade 8 Nut - Marks 60° Apart

Inch Lock Nuts, All Metal (Three optional methods)

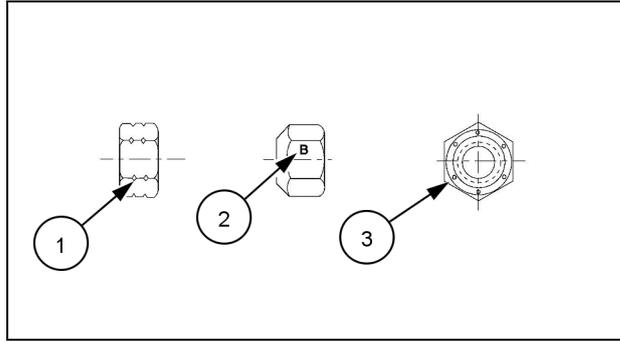

20090268 4

Grade Identification

Grade	Corner Marking Method (1)	Flats Marking Method (2)	Clock Marking Method (3)
Grade A	No Notches	No Mark	No Marks
Grade B	One Circumferential Notch	Letter B	Three Marks
Grade C	Two Circumferential Notches	Letter C	Six Marks

Maintenance chart and Lubrication

F140B	ANZ (6 x 3 torque converter) OR (Tier 1) --- APAC (6 x 3 torque converter) OR (Tier 1) --- MEA (6 x 3 torque converter) OR (Tier 1)
F170B	ANZ (6 x 3 torque converter) OR (Tier 2) OR (Tier 0) --- APAC (6 x 3 torque converter) OR (Tier 2) OR (Tier 0) --- MEA (6 x 3 torque converter) OR (Tier 2) OR (Tier 0)
F200B	ANZ (8 x 8 direct drive) OR (Tier 2) OR (Tier 0) --- APAC (8 x 8 direct drive) OR (Tier 2) OR (Tier 0) --- MEA (8 x 8 direct drive) OR (Tier 2) OR (Tier 0)

SERVICE POINTS		A	B	C	D	E	F
As Required (AR)	Air cleaner (Note 1)	1	AR				
	Hydraulic filter (Note 2)	1	AR				
	Cab Air Filter (if equipped)	1	AR				
	Batteries (See Electrical System)	2					AR
10 hours or daily	Engine oil level (including filters)	1	10				
	Radiator (coolant level) (Note 3)	1	10				
	Transmission Oil Level (warm, engine running) (Transmission)	1	10				
	Differential Lock Oil Filter (if equipped)	1	10				
50 hours or every week	Fuel Reservoir Filter (wash screen)	1					50
	Fuel Water Separator (drain water)	2					50
	Hydraulic tank (complete system)	1	50				
100 hours or every 15 days	Moldboard Lift Cylinder Pivots	4			100		
	Moldboard Lift Cylinders Balls	2			100		
	Moldboard Side Shift Cylinders Balls	2			100		
	Articulation of Tilt Cylinders	2			100		
	Moldboard Tilt Pivots	2			100		
	Articulation Cylinders Pivots	4			100		
	Articulation Bearings	2			100		
	Drawbar Ball and Socket	1			100		
250 hours or every 1 month	Alternator and Air Conditioner Belt	2	250				
	Universal Joints and Drive Shaft	2			250		
	Circle Turn Gearbox Oil Level	1	250				
	Differential Lock Oil Filter (if equipped)	1		250			
	Front Axle Articulation Pin	2			250		
	Front Wheel Lean Bar Pivots	2			250		
	Front Wheel Lean Cylinder Pivots	2			250		
	Front Wheel Knuckle Lean Pivots	4			250		
	Knuckle King Pin Bearings	4			250		
	Moldboard Lift Cylinder Articulation Bearings	2			250		
	Tandem Swing Bearing	2			250		
	Tires Condition and Pressure	6	250				
	Cab Air Filter (if equipped)	1					250
	Steering Bar Ball Joints	4			250		
	Moldboard Articulation Pivots	4			250		
	Moldboard Side Shift Terminal Pivots	2			250		
	Engine Oil and Oil Filter	2		250			
A – Points / B – Check / C – Change / D – Lubricate / E – Adjust / F – Clean / Drain							

INTRODUCTION

	SERVICE POINTS	A	B	C	D	E	F
500 hours or every 3 months	Fuel Filters and Water Separator	2		500			
	Fuel Tank Drain Plug (drain sediment)	1					500
	Hydraulic System Oil Filter	1		500			
	Transmission Oil Filter (Note 4) (Transmission)	1		500			
	Transmission Oil Filter (Transmission)	2		500			
	Front Wheel Bearing Grease	2		500			
	Tandem Wheel Shafts Bearings (Graziano)	8			500		
	Tandem Case Oil Level	2	500				
	Rear Axle Differential and Planetary Gear Oil Level (Graziano)	1	500				
	ROPS Fixing Bolts Torque	16				500	
	Seat Belts Fixing Bolts Torque	2				500	
1000 hours or every 6 months	Transmission Screen (Transmission)	1					1000
	Transmission Oil (Note 4) (Transmission)	1		1000			
	Transmission Oil (Transmission)	1		1000			
	Engine Valves Clearance	12				1000	
	Circle Turn Gear Housing Oil	1		1000			
	Alternator and Air Conditioning Belts	2		1000			
	Air Cleaner Elements (See Air Cleaner System)	2		1000			
Tandem Case Oil	2		1000				
2000 hours or every year	Rear Axle Differential and Planetary Gear Oil (Graziano)	1		2000			
	Hydraulic System Oil (Note 5)	1		2000			
	Engine Coolant	2		2000			
	Turbocharger Fixing Bolts Torque	4				2000	
A – Points / B – Check / C – Change / D – Lubricate / E – Adjust / F – Clean / Drain							

ATTENTION: See **Consumables** for specifications and detailed capacities about Fluids and Lubricants.

NOTE: (1) – Carry out maintenance on the air filter element if the main warning display (Non-Critical Warnings – YELLOW) shows "AIR FILTER".

NOTE: (2) – Carry out maintenance on the hydraulic filter element if the main warning display (Non-Critical Warnings – YELLOW) shows "HYDRAULIC FILTER".

NOTE: (3) – Check the coolant level in the expansion tank if the main stop display (Critical Warnings – RED) shows "COOLANT LEVEL".

NOTE: (4)- Change the transmission fluid and replace the filter after the first 100 hours of operation.

NOTE: (5)- Change every 2000 hours or once a year, whichever comes first.

Maintenance chart and Lubrication

F140B	ANZ (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- APAC (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- MEA (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP)
F170B	ANZ (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- APAC (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- MEA (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP)
F200B	ANZ (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- APAC (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- MEA (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP)

		SERVICE POINTS					
		A	B	C	D	AND	F
As Required (AR)	Air cleaner (Note 1)	1	AR				
	Hydraulic filter (Note 2)	1	AR				
	Cab Air Filter (if equipped)	1	AR				
	Batteries (See Electrical System)	2					AR
10 hours or daily	Engine oil level (including filters)	1	10				
	Radiator (coolant level) (Note 3)	1	10				
	Transmission Oil Level (warm, engine running) (Transmission 6X3 Torque Converter 8X4 Direct Drive)	1	10				
	Differential Lock Oil Filter (if equipped)	1	10				
50 hours or every week	Fuel Reservoir Filter (wash screen)	1					50
	Fuel Water Separator (drain water)	2					50
	Hydraulic tank (complete system)	1	50				
100 hours or every 15 days	Moldboard Lift Cylinder Pivots	4			100		
	Moldboard Lift Cylinders Balls	2			100		
	Moldboard Side Shift Cylinders Balls	2			100		
	Articulation of Tilt Cylinders	2			100		
	Moldboard Tilt Pivots	2			100		
	Articulation Cylinders Pivots	4			100		
	Articulation Bearings	2			100		
	Drawbar Ball and Socket	1			100		
250 hours or every 1 month	Alternator and Air Conditioner Belt	2	250				
	Universal Joints and Drive Shaft	2			250		
	Circle Turn Gearbox Oil Level	1	250				
	Differential Lock Oil Filter (if equipped)	1		250			
	Front Axle Articulation Pin	2			250		
	Front Wheel Lean Bar Pivots	2			250		
	Front Wheel Lean Cylinder Pivots	2			250		
	Front Wheel Knuckle Lean Pivots	4			250		
	Knuckle King Pin Bearings	4			250		
	Moldboard Lift Cylinder Articulation Bearings	2			250		
	Tandem Swing Bearing	2			250		
	Tires Condition and Pressure	6	250				
	Cab Air Filter (if equipped)	1					250
	Steering Bar Ball Joints	4			250		
	Moldboard Articulation Pivots	4			250		
Moldboard Side Shift Terminal Pivots	2			250			
A – Points / B – Check / C – Change / D – Lubricate / E – Adjust / F – Clean / Drain							

INTRODUCTION

	SERVICE POINTS	A	B	C	D	AND	F
500 hours or every 3 months	Fuel Filters and Water Separator	2		500			
	Fuel Tank Drain Plug (drain sediment)	1					500
	Engine Oil and Oil Filter	2		500			
	Hydraulic System Oil Filter	1		500			
	Transmission Oil Filter (Note 4) (Transmission)	1		500			
	Transmission Oil Filter (Transmission)	2		500			
	Front Wheel Bearing Grease	2		500			
	Tandem Wheel Shafts Bearings (Graziano)	8				500	
	Tandem Case Oil Level	2	500				
	Rear Axle Differential and Planetary Gear Oil Level (Graziano)	1	500				
	ROPS Fixing Bolts Torque	16					500
	Seat Belts Fixing Bolts Torque	2					500
1000 hours or every 6 months	Transmission Screen (Transmission)	1					1000
	Transmission Oil (Note 4) (Transmission)	1		1000			
	Transmission Oil (Transmission)	1		1000			
	Engine Valves Clearance	12					1000
	Circle Turn Gear Housing Oil	1		1000			
	Alternator and Air Conditioning Belts	2		1000			
	Air Cleaner Elements (See Air Cleaner System)	2		1000			
Tandem Case Oil	2		1000				
2000 hours or every year	Rear Axle Differential and Planetary Gear Oil (Graziano)	1		2000			
	Hydraulic System Oil (Note 5)	1		2000			
	Engine Coolant	2		2000			
	Turbocharger Fixing Bolts Torque	4					2000
A – Points / B – Check / C – Change / D – Lubricate / E – Adjust / F – Clean / Drain							

ATTENTION: See **Consumables** for specifications and detailed capacities about Fluids and Lubricants.

NOTE: (1) – Carry out maintenance on the air filter element if the main warning display (Non-Critical Warnings – YELLOW) shows "AIR FILTER".

NOTE: (2) – Carry out maintenance on the hydraulic filter element if the main warning display (Non-Critical Warnings – YELLOW) shows "HYDRAULIC FILTER".

NOTE: (3) – Check the coolant level in the expansion tank if the main stop display (Critical Warnings – RED) shows "COOLANT LEVEL".

NOTE: (4)- Change the transmission fluid and replace the filter after the first 100 hours of operation.

NOTE: (5)- Change every 2000 hours or once a year, whichever comes first.

Maintenance chart and Lubrication

F170B	ANZ (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD) --- APAC (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD) --- MEA (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD)
F200B	ANZ (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD) --- APAC (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD) --- MEA (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD)

SERVICE POINTS		A	B	C	D	E	F
As Required (AR)	Air cleaner (Note 1)	1	AR				
	Hydraulic filter (Note 2)	1	AR				
	Cab Air Filter (if equipped)	1	AR				
	Batteries (See Electrical System)	2					AR
10 hours or daily	Engine oil level (including filters)	1	10				
	Radiator (coolant level) (Note 3)	1	10				
	Transmission oil level (warm, engine running)	1	10				
	Differential Lock Oil Filter (if equipped)	1	10				
50 hours or every week	Fuel Reservoir Filter (wash screen)	1					50
	Fuel Water Separator (drain water)	2					50
	Hydraulic tank (complete system)	1	50				
100 hours or every 15 days	Moldboard Lift Cylinder Pivots	4			100		
	Moldboard Lift Cylinders Balls	2			100		
	Moldboard Side Shift Cylinders Balls	2			100		
	Articulation of Tilt Cylinders	2			100		
	Moldboard Tilt Pivots	2			100		
	Articulation Cylinders Pivots	4			100		
	Articulation Bearings	2			100		
	Drawbar Ball and Socket	1			100		
250 hours or every 1 month	Alternator and Air Conditioner Belt	2	250				
	Universal Joints and Drive Shaft	2			250		
	Circle Turn Gearbox Oil Level	1	250				
	Differential Lock Oil Filter (if equipped)	1		250			
	Front Axle Articulation Pin	2			250		
	Front Wheel Lean Bar Pivots	2			250		
	Front Wheel Lean Cylinder Pivots	2			250		
	Front Wheel Knuckle Lean Pivots	4			250		
	Knuckle King Pin Bearings	4			250		
	Moldboard Lift Cylinder Articulation Bearings	2			250		
	Tandem Swing Bearing	2			250		
	Tires Condition and Pressure	6	250				
	Cab Air Filter (if equipped)	1					250
	Steering Bar Ball Joints	4			250		
	Moldboard Articulation Pivots	4			250		
	Moldboard Side Shift Terminal Pivots	2			250		
500 hours or every 3 months	Fuel Filters and Water Separator	2		500			
	Fuel Tank Drain Plug (drain sediment)	1					500
	Front Wheel Drive (AWD) Pump Filter (Note 6)	1		500			
	Engine Oil and Oil Filter	2		500			
	Hydraulic System Oil Filter	1		500			
	Transmission Oil and Oil Filter	1		500			
	Front Wheel Bearing Grease	2		500			
	Tandem Wheel Shafts Bearings (Graziano)	8			500		
	Tandem Case Oil Level	2	500				
	Rear Axle Differential and Planetary Gear Oil Level (Graziano)	1	500				
	ROPS Fixing Bolts Torque	16					500
	Seat Belts Fixing Bolts Torque	2					500

A – Points / B – Check / C – Change / D – Lubricate / E – Adjust / F – Clean / Drain

INTRODUCTION

	SERVICE POINTS	A	B	C	D	E	F
1000 hours or every 6 months	Transmission Screen	1					1000
	Transmission Oil	1		1000			
	Engine Valves Clearance	12				1000	
	Circle Turn Gear Housing Oil	1		1000			
	Alternator and Air Conditioning Belts	2		1000			
	Air Cleaner Elements (See Air Cleaner System)	2		1000			
	Front Wheel Drive (AWD) Gear Housing Oil (Note 5)	2		1000			
	Tandem Case Oil	2		1000			
2000 hours or every year	Rear Axle Differential and Planetary Gear Oil (Graziano)	1		2000			
	Hydraulic System Oil (Note 4)	1		2000			
	Engine Coolant	2		2000			
	Turbocharger Fixing Bolts Torque	4				2000	
A – Points / B – Check / C – Change / D – Lubricate / E – Adjust / F – Clean / Drain							

ATTENTION: See **Consumables** for specifications and detailed capacities about Fluids and Lubricants.

NOTE: (1) – Carry out maintenance on the air filter element if the main warning display (Non-Critical Warnings – YELLOW) shows "AIR FILTER".

NOTE: (2) – Carry out maintenance on the hydraulic filter element if the main warning display (Non-Critical Warnings – YELLOW) shows "HYDRAULIC FILTER".

NOTE: (3) – Check the coolant level in the expansion tank if the main stop display (Critical Warnings – RED) shows "COOLANT LEVEL".

NOTE: (4) - Change every 2000 hours or once a year, whichever comes first.

NOTE: (5) – Change the oil in the front wheel drive gear housings after the first 100 hours of operation.

NOTE: (6) – Replace the front wheel drive pump hydraulic filter after the first 100 hours.

Consumables

F140B	ANZ (6 x 3 torque converter) OR (Tier 1) --- APAC (6 x 3 torque converter) OR (Tier 1) --- MEA (6 x 3 torque converter) OR (Tier 1)
F170B	ANZ (6 x 3 torque converter) OR (Tier 2) OR (Tier 0) --- APAC (6 x 3 torque converter) OR (Tier 2) OR (Tier 0) --- MEA (6 x 3 torque converter) OR (Tier 2) OR (Tier 0)
F200B	ANZ (8 x 8 direct drive) OR (Tier 2) OR (Tier 0) --- APAC (8 x 8 direct drive) OR (Tier 2) OR (Tier 0) --- MEA (8 x 8 direct drive) OR (Tier 2) OR (Tier 0)

Fuel Reservoir

Specifications	No. 2 DIESEL
Total capacity	341 l (90 US gal)

Engine Oil

Specifications	NEW HOLLAND AMBRA SUPER GOLD 15W-40
Capacity with a filter change	
Capacity without a filter change	

Engine Cooling System

Specifications	50% Water + 50% NEW HOLLAND AMBRA AGRIFLU
Total capacity	32 l (8.5 US gal)

Hydraulic System

Specifications	NEW HOLLAND AMBRA MASTERTRAN™ HYDRAULIC TRANSMISSION OIL
Total capacity	180 l (47.6 US gal)
Tank with a filter	90 l (23.8 US gal)

Transmission

Specifications	
Refill capacity (with filter change)	
Refill capacity (without filter change)	

Power Rear Axle

Specifications	NEW HOLLAND AMBRA LIMITED SLIP ADDITIVE
Central compartment (differential)	F140B Models – 40 l (10.6 US gal) F170B Models – 44 l (11.6 US gal) F1200B Models – 44 l (11.6 US gal)

Tandem and Brakes

Specifications	NEW HOLLAND AMBRA TRX 20W-40
Refill capacity	69 l (18.2 US gal)

Circle Turn Gear Reducer

Specifications	NEW HOLLAND AMBRA HYPOIDE 90
Refill	2.8 l (0.7 US gal)

Grease fittings

Specifications	NEW HOLLAND AMBRA GR-9 MULTI-PURPOSE GREASE
Rear Ripper/Scarifier/Blade	–
Front Axle Wheel Hubs/Bearings	–

Consumables

F140B	ANZ (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- APAC (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- MEA (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP)
F170B	ANZ (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- APAC (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- MEA (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP)
F200B	ANZ (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- APAC (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP) --- MEA (8 x 8 direct drive) OR (6 x 3 torque converter) OR (Tier 3-VHP)

Fuel Reservoir

Specifications	No. 2 DIESEL
Total capacity	341 l (90 US gal)

Engine Oil

Specifications	NEW HOLLAND AMBRA SUPER GOLD 15W-40
Capacity with a filter change	16 l (4.2 US gal)
Capacity without a filter change	15 l (4.0 US gal)

Engine Cooling System

Specifications	50% Water + 50% NEW HOLLAND AMBRA AGRIFLU
Total capacity	32 l (8.5 US gal)

Hydraulic System

Specifications	For a Cold Climate – NEW HOLLAND AMBRA MASTERTRAN™ HYDRAULIC TRANSMISSION OIL For a Tropical Climate – NEW HOLLAND AMBRA HYDROSYSTEM 68 HV
Total capacity	180 l (47.6 US gal)
Tank with a filter	90 l (23.8 US gal)

Transmission

Specifications	
Refill capacity (with filter change)	
Refill capacity (without filter change)	

Power Rear Axle

Specifications	NEW HOLLAND AMBRA LIMITED SLIP ADDITIVE
Central compartment (differential)	F140B Models – 40 l (10.6 US gal) F170B Models – 44 l (11.6 US gal) F1200B Models – 44 l (11.6 US gal)

Tandem and Brakes

Specifications	NEW HOLLAND AMBRA TRX 20W-40
Refill capacity	69 l (18.2 US gal)

Circle Turn Gear Reducer

Specifications	NEW HOLLAND AMBRA HYPOIDE 90
Refill	2.8 l (0.7 US gal)

Grease fittings

Specifications	NEW HOLLAND AMBRA GR-9 MULTI-PURPOSE GREASE
Rear Ripper/Scarifier/Blade	–
Front Axle Wheel Hubs/Bearings	–

Consumables

F170B	ANZ (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD) --- APAC (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD) --- MEA (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD)
F200B	ANZ (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD) --- APAC (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD) --- MEA (8 x 8 direct drive) OR (Tier 3-VHP) OR (AWD)

Fuel Reservoir

Specifications	No. 2 DIESEL
Total capacity	341 l (90 US gal)

Engine Oil

Specifications	NEW HOLLAND AMBRA SUPER GOLD 15W-40
Capacity with a filter change	16 l (4.2 US gal)
Capacity without a filter change	15 l (4.0 US gal)

Engine Cooling System

Specifications	50% Water + 50% NEW HOLLAND AMBRA AGRIFLU
Total capacity	32 l (8.5 US gal)

Hydraulic System

Specifications	For a Cold Climate – NEW HOLLAND AMBRA MASTERTRAN™ HYDRAULIC TRANSMISSION OIL For a Tropical Climate – NEW HOLLAND AMBRA HYDROSYSTEM 68 HV
Total capacity	200 l (52.8 US gal)
Tank with a filter	90 l (23.8 US gal)

Transmission

Specifications	
Refill capacity (with filter change)	
Refill capacity (without filter change)	

Power Rear Axle

Specifications	NEW HOLLAND AMBRA LIMITED SLIP ADDITIVE
Central compartment (differential)	44 l (11.6 US gal)

Tandem and Brakes

Specifications	NEW HOLLAND AMBRA TRX 20W-40
Refill capacity	69 l (18.2 US gal)

Circle Turn Gear Reducer

Specifications	NEW HOLLAND AMBRA HYPOIDE 90
Refill	2.8 l (0.7 US gal)

Front Wheel Reducer

Specifications	NEW HOLLAND AMBRA LIMITED SLIP ADDITIVE
Refill capacity	4.1 l (1.1 US gal)

Grease fittings

Specifications	NEW HOLLAND AMBRA GR-9 MULTI-PURPOSE GREASE
Rear Ripper/Scarifier/Blade	–
Front Axle Wheel Hubs/Bearings	–

Conversion factors

F140B	ANZ --- APAC --- MEA
F170B	ANZ --- APAC --- MEA
F200B	ANZ --- APAC --- MEA

Area

Metric System to U.S. System	U.S. System to Metric System
1 m ² = 10.76391 ft ²	1 ft ² = 0.09290 m ²
1 ha = 2.47105 ac	1 ac = 0.40469 ft ²
m ² – Square meter / ft ² – Square foot / ha – Hectare / ac – Acre	

Force

Metric System to U.S. System	U.S. System to Metric System
1 N = 3.59694 oz	1 oz = 0.27801 N
1 N = 0.22481 lb	1 lb = 4.44822 N

Length

Metric System to U.S. System	U.S. System to Metric System
1 mm = 0.03937 in	1 in = 25.4 mm
1 m = 3.28084 ft	1 ft = 0.30480 m
1 km = 0.62137 miles	1 miles = 1.60934 km

Mass

Metric System to U.S. System	U.S. System to Metric System
1 kg = 2.20462 lb	1 lb = 0.45359 kg
1 g = 0.03527 oz	1 oz = 28.34952 g

Mass/Area

Metric System to U.S. System	U.S. System to Metric System
1 kg/ha = 0.89300 lbs/ac	1 lbs/ac = 1.11982 kg/ha

Mass/Energy

Metric System to U.S. System	U.S. System to Metric System
1 g/kWh = 0.00164 lb/(HP/h)	1 lb/(HP/h) = 608,277 g/kWh

Mass/Volume

Metric System to U.S. System	U.S. System to Metric System
1 kg/m ³ = 1.68556 lb/yd ³	1 lb/yd ³ = 0.59328 kg/m ³

Horse Power

Metric System to U.S. System	U.S. System to Metric System
1 kW = 1.35962 Hp	1 Hp = 0.73550 kW

Pressure

Metric System to U.S. System	U.S. System to Metric System
1 bar = 14.50377 lbf/in ²	1 lbf/in ² = 0.06894 bar
1 kPa = 0,14503 lbf/in ²	1 lbf/in ² = 6,89475 kPa

Engine coolant

Metric System to U.S. System	U.S. System to Metric System
1 °C = ((1.8 x °C) + 32) °F	1 °F = (0.56 x (°F - 32)) °C

Torque

Metric System to U.S. System	U.S. System to Metric System
1 N·m = 0.73756 lb ft	1 lb ft = 1.35582 N·m
1 N·m = 8.85075 lb in	1 lb in = 0.11298 N·m

Velocity

Metric System to U.S. System	U.S. System to Metric System
1 km/h = 0.62137 mph	1 mph = 1.60934 km/h

Volume

Metric System to U.S. System	U.S. System to Metric System
1 cm ³ = 0.06102 in ³	1 in ³ = 16.38706 cm ³
1 m ³ = 35.31467 ft ³	1 ft ³ = 0.02832 m ³
1 m ³ = 1.30795 yd ³	1 yd ³ = 0.76455 m ³
1 ml = 0.03381 US fl oz	1 US fl oz = 29.57353 ml
1 litre = 1.05669 US qt	1 US qt = 0.94635 litre
1 litre = 0.87988 l	1 l = 1.13652 litre
1 litre = 0.26417 l	1 l = 3.78541 litre
1 litre = 0.21997 l	1 l = 4.54610 litre

Volume/Time

Metric System to U.S. System	U.S. System to Metric System
1 l/min = 0.26417 US gpm	1 US gpm = 3.78541 l/min
1 l/min = 0.21997 UK gpm	1 UK gpm = 4.54610 l/min



SERVICE MANUAL

Transmission

- F140B Torque converter transmission, Tier 3, made in Brazil [NAAF08001 -]**
- F170B Direct drive transmission, Tier 3, made in Brazil [HBZN0170HBAF00360 -]**
- F170B Torque converter transmission, Tier 3, made in Brazil [NAAF09000 -]**
- F200B Direct drive transmission, Tier 3, made in Brazil [NAAF11000 -]**
- F200B Torque converter transmission, Tier 3, made in Brazil [HBZN0200TBAF00511 -]**