

Product: Takeuchi TB175 Compact Excavator Operators Manual(Book No. AL3E008)
Full Download: <https://www.arepairmanual.com/downloads/takeuchi-tb175-compact-excavator-operators-manualbook-no-al3e008/>

TB175

TB175

Hydraulic Excavator

Serial No. 17511264~
Book No. AL3E008

OPERATOR'S MANUAL

OPERATOR'S MANUAL

TAKEUCHI

TAKEUCHI



WARNING

Sample of manual. Download All 219 pages of Read and understand these instructions.
<https://www.arepairmanual.com/downloads/takeuchi-tb175-compact-excavator-operators-manualbook-no-al3e008/> Failure to do so can cause injury or death.





SAFETY ALERT SYMBOL

This symbol means Attention! Be Alert! Your Safety Is Involved.
The message that follows the symbol contains important information about safety.

Read and understand the message to avoid personal injury or death.

- **It is the owner or employer's responsibility to fully instruct each operator in the proper and safe operation of all equipment. All persons using this machine should thoroughly familiarize themselves with the following sections.**
- **All operators must be instructed on the proper functions of the excavator before running the machine.**
- **Learn and practice correct use of the machine controls in a safe, clear area before operating this machine on a job site.**

 CAUTION	
 <small>E3A010</small>	<p>Improper operation, inspection and maintenance of this machine can cause injury or death.</p> <p>Read and understand this manual before performing any operation, inspection or maintenance on this machine.</p>

- **Always store this manual near at hand preferably on the machine itself. If it should be lost or damaged, immediately order a new one from your Takeuchi dealer.**
When transferring ownership of this machine, be sure to provide this manual to the next owner.
- **Takeuchi supplies machines complying to the local regulations and standards of the country of export. If your machine has been purchased in another country or from a person or company of another country, it may not have the safety devices or safety standards required for use in your country. Should you have any question about whether your machine complies with the regulations and standards of your country, contact a Takeuchi dealer.**
- **Please note that the contents and diagrams included in this manual may not match your machine exactly.**

Sample of manual. Download All 219 pages at:

<https://www.arepairmanual.com/downloads/takeuchi-tb175-compact-excavator-operators-manualbook-no-al3e008/>

CALIFORNIA

Proposition 65 Warning

Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects, and other reproductive harm.




Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands after handling battery.

It is your responsibility to observe all pertinent laws and regulations and to follow the manufacturer's instructions on machine operation, inspection and maintenance.

Virtually all accidents occur as the result of a failure to observe basic safety rules and precautions. An accident can often be avoided by recognizing potentially hazardous situations beforehand. Read and understand all of the safety messages which explain how to prevent these accidents from occurring. Do not operate the machine until you are sure that you have gained a proper understanding of its operation, inspection and maintenance.

■ SIGNAL WORDS

Safety messages appearing in this manual and on machine decals are identified by the words "DANGER", "WARNING" and "CAUTION". These signal words mean the following:


 DANGER	 WARNING	 CAUTION
The word "DANGER" indicates an imminently hazardous situation which, if not avoided, can result in serious injury or death.	The word "WARNING" indicates a potentially hazardous situation which, if not avoided, could result in serious injury or death.	The word "CAUTION" indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

IMPORTANT: The word "IMPORTANT" is used to alert against operators and maintenance personnel about situations which can result in possible damage to the machine and its components.



It is impossible to foresee every possible circumstance that might involve a potential hazard. The warnings in this manual or on the machine can not cover all possible contingencies. You must exercise all due care and follow normal safety procedures when operating the machine so as to ensure that no damage occurs to the machine, its operators or other persons.

■ EXPLANATION OF GRAPHICAL SYMBOLS

Following is an explanation of symbols used in this manual.

 , X prohibition

 /  Lock

 /  Unlock

INTRODUCTION

Foreword


This manual describes operation, inspection and maintenance of the machine, as well as safety instructions to be heeded during these operations.

If you have any questions about the machine, please contact a Takeuchi sales or service outlet.

■ Manual storage compartment

A compartment for storing this manual is provided at the position shown on the diagram below.


1. Open the cover behind the seat.
2. After using the manual, place it in the plastic pouch and store it back in the manual storage compartment.

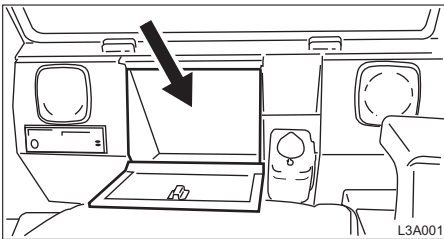


■ Serial numbers

Check the serial numbers of the machine and the engine and write them in the spaces provided below.

Machine number :

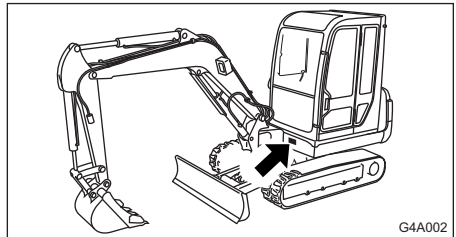

Engine number :

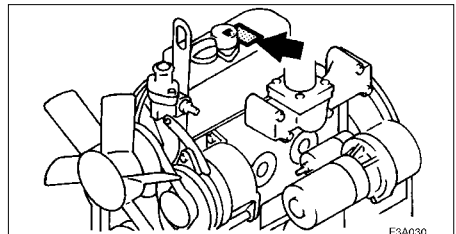

MACHINE DESCRIPTION


■ Front, rear, left and right

This manual refers the front, rear, left and right of the machine as seen when sitting in the operator's seat with the dozer blade visible to the front.

■ Designated operations

Use this machine primarily for the following operations:

- Excavating
- Digging ditches
- Digging side ditches
- Leveling
- Loading

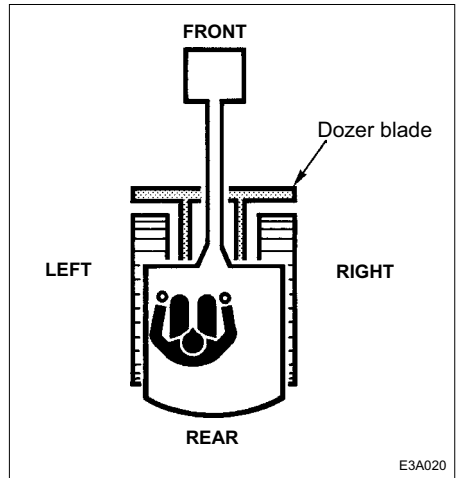

■ Features

- Automatic travel shift-down system.
- Isolation mounted cab minimizes vibration.
- Short pitch rubber crawler.
- Low engine noise and exhaust emissions.
- Electro over hydraulic control of auxiliary hydraulic circuit.
- One touch engine deceleration button.
- Two-speed slew allows the operator to slow the excavators slew speed.
- Engine emergency stop/idle system.
- Self-adjusting hydraulic crawler tension system.
- Travel motor are equipped with shock less valves for smooth starts and stops.










■ Break-in period

When the machine is new, heed the instructions below when operating the machine for the first 100 hours (as indicated on the hour meter).

Using a new machine roughly without breaking it in will lead to quicker deterioration of machine performance and may shorten the machine's service life.

- Warm up the engine and hydraulic oil sufficiently.
- Avoid heavy loads and rapid operations. Operate with a load of about 80% the maximum load.
- Do not start up, accelerate, change directions, or stop abruptly unless necessary.

CONTENTS

	Introduction	2
	Machine Description	3
	Safety	7
	Controls	35
	Operation	63
	Transport	91
	Maintenance	95
	Troubleshooting	141
	Specifications	153
	Options	177
	Index	209




SAFETY


General precautions	8
Preparing precautions	12
Starting precautions	14
Operating precautions	16
Stopping precautions	23
Transporting precautions	24
Maintenance precautions	25
Safety signs (Decals)	32

**Observe all safety rules**

- Operation, inspection and maintenance of this machine must be performed only by a trained and qualified person.
- All rules, regulations, precautions and safety procedures must be understood and followed when performing operation, inspection and maintenance of this machine.
- Do not perform any operation, inspection and maintenance of this machine when under the adverse influence of alcohol, drugs, medication, fatigue, or insufficient sleep.

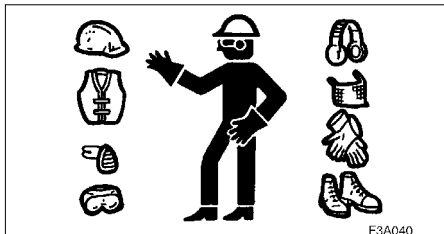Wear appropriate clothing and personal protective equipment


- Do not wear loose clothing or any accessory that can catch on controls or in moving parts.
- Do not wear oily or fuel stained clothing that can catch fire.
- Wear a hard hat, safety shoes, safety glasses, filter mask, heavy gloves, ear protection and other protective equipment as required by job conditions. Wear required appropriate equipment such as safety glasses and filter mask when using grinders, hammers or compressed air, as metal fragments or other objects can fly and cause serious injury.
- Use hearing protection when operating the machine. Loud prolonged noise can cause hearing impairments, even the total loss of hearing.

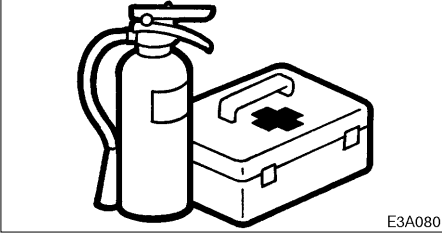**Provide a fire extinguisher and first aid kit**


- Know where a fire extinguisher and first aid kit are located and understand how to use them.
- Know how to contact emergency assistance and first aid help.

Never remove safety equipment

- Make sure all protective guards, canopies, doors, etc., are in place and secure. Repair or replace damaged components before operating the machine.

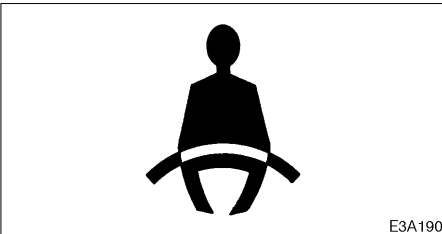

- Know how to use the safety lock lever, seat belt and other safety equipment and use them properly.
- Never remove any safety equipment except for service. Keep all safety equipment in good operating condition.

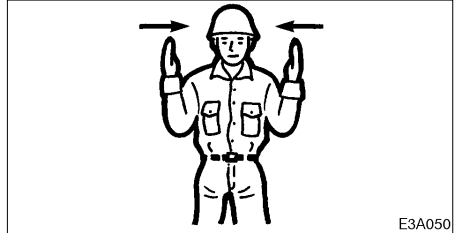
Use a signal person and flagman

Know and use the hand signals required for particular jobs and make sure who has the responsibility for signaling.

- All personnel must fully understand all the signals.
- The operator shall respond to signals only from the appointed signal person, but shall obey a stop signal at any time from anyone.
- The signal person must stand in a clearly visible location when giving signals.



Be sure to lock the safety lock lever before leaving the operator's seat

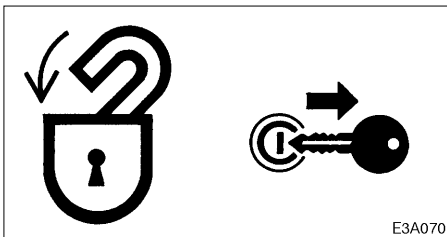


- Before leaving the operator's seat, set the safety lock lever securely to the lock position and stop the engine. If any controls should be touched accidentally when the safety lock lever has not been locked, the machine will move suddenly, and cause serious injury or death.
- Note that the dozer blade is not locked, even when the safety lock lever is set to the lock position. Do not touch this control accidentally.
- Before leaving the operator's seat, lower the working equipment, lock the safety lock lever, and stop the engine. Also, be sure to remove the key and take it with you.

Avoid fire and explosion hazards



Keep flames away from fuel, hydraulic fluid, oil, grease and antifreeze. Fuel is particularly flammable and dangerous.

- When handling these combustible materials, keep lit cigarettes, matches, lighters and other flames or sources of flames away.
- Do not smoke or permit open flames while fueling or near fueling operations.
- Never remove the fuel cap or refuel with the engine running or hot. Never allow fuel to spill on hot machine components.
- Clean up spilled fuel, oil or other flammable fluids immediately.
- Check for fuel, oil or hydraulic fluid leaks. Stop all leaks and clean the machine before operating.
- Do not cut or weld on pipes or tubes that contain flammable fluids. Clean thoroughly with nonflammable solvent before cutting or welding.
- Remove all trash or debris from the machine. Make sure that oily rags or other flammable material are not stored on the machine.
- Handle all solvents and dry chemicals according to procedures identified on manufacturers' containers. Work in a well-ventilated area.
- Never use fuel for cleaning purposes. Always use a nonflammable solvent.
- Store all flammable fluids and materials in a safe and well-ventilated place.

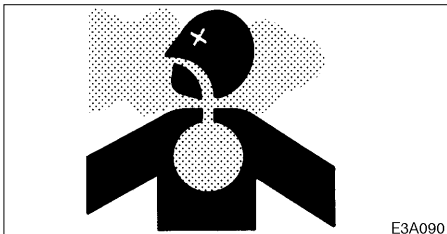**Exhaust fumes from the engine can kill**

- Do not operate the engine in an enclosed area without adequate ventilation.
- If natural ventilation is poor, install ventilators, fans, exhaust extension pipes or other artificial venting devices.

Handling asbestos dust

Inhaling asbestos dust has been linked to lung cancer. When handling materials which may contain asbestos, take the following precautions:

- Never use compressed air for cleaning.
- Avoid brushing or grinding of the materials.
- For clean up, use wet methods or a vacuum equipped with a high efficiency particulate air (HEPA) filter.
- Wear an approved respirator if there is no other way to control the dust. When working indoors, install a ventilation system with a macro molecular filter.

Be careful not to get crushed or cut

Never put your hands, feet or other parts of your body between the upperstructure and the undercarriage or tracks, between the machine body and working equipment, or between a cylinder and moving part. The size of these gaps change when the machine moves and if caught a person can suffer severe injury or death.

Using optional products

- Consult with a Takeuchi dealer before installing optional attachments.
- Do not use attachments that have not been approved by Takeuchi or a Takeuchi dealer. Doing so may compromise safety or adversely affect the machine's operation or service life.
- Takeuchi will not be held responsible for any injuries, accidents or damage to its products caused by the use of a non-approved attachment.


Never modify the machine

Unauthorized modifications to this machine can cause injury or death. Never make unauthorized modifications to any part of this machine.

**Know the working area**


Before starting operation, know the working area to ensure safety.

- Check the topography and ground condition of the working area, or the structure of the building when working indoors, and take the necessary safety measures in dangerous spots.
- Note and avoid all hazards and obstructions such as ditches, underground lines, trees, cliffs, overhead electrical wires or areas where there is danger of a slide.

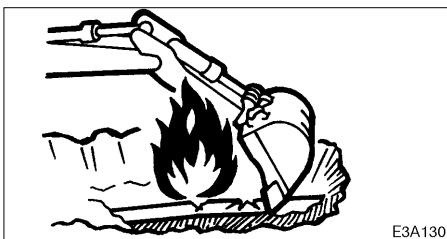


- Check with the local utilities for the locations of buried gas and water pipes and buried power cables. Determine jointly what specific precautions must be taken to insure safety.
- When working on roads, be sure to take into account the safety of pedestrians and vehicles.
 - Use a flagman and/or signals.
 - Fence off the working area and prohibit entry to unauthorized persons.
- When working in water or crossing shallow streams or creeks, check the depth of the water, the solidity of the ground, and the speed of the current beforehand. Make sure the water is not deeper than the allowable depth.

Refer to the section titled “Cautions on Operating” for further instructions.

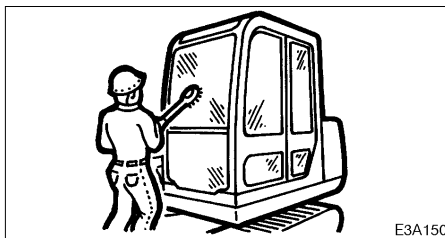Always keep the machine clean

- Clean windows, mirrors and lights to ensure good visibility.
- Wipe off any oil, grease, mud, snow or ice, to prevent accidents due to slipping.
- Remove all loose objects stored in the machine and all objects which do not belong in or on the machine and its equipment.
- Remove any dirt, oil or grease from the engine area, to prevent fires.
- Clean the area around the operator’s seat, removing any potential obstacles.

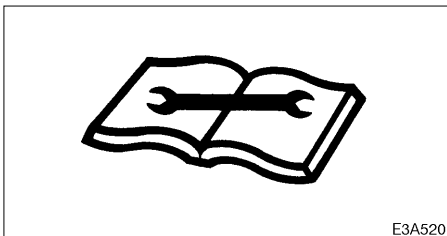**Perform inspection and maintenance daily**

Failure to notice or repair machine irregularities or damage can lead to accidents.

- Before operating, perform the prescribed inspections and make repairs immediately should any irregularities be found.
- If a failure that causes loss of control such as steering, service brakes or engine occurs, stop the machine motion as quickly as possible, follow the shutdown procedure, and keep machine securely parked until the malfunction is corrected.



Maintain three point contact when mounting and dismounting

- Do not jump on or off the machine. Never attempt to mount or dismount a moving machine.
- When mounting and dismounting the cab, first open the door fully to the locked position and check that it does not move. (For machines with cabs)



- Always face the access system and maintain a three point contact with the recommended handrails and steps while getting on and off the machine. Keep steps and platform clean.
- Never use the safety lock lever or control levers as hand holds.


Clear the area of other persons before starting the machine

Do not start the engine until you are sure it is safe. Before starting, check or perform the following.


- Walk around the machine and warn all personnel who may be servicing the machine or are in the machine path. Do not start until all personnel are clearly away from the machine.
- Check for any “DO NOT OPERATE” tags or similar warning notices on the cab door, controls or starter switch.
- Sound horn to alert everyone around the machine.

Start the engine from the operator’s seat

- Adjust, secure and latch the operator’s seat.

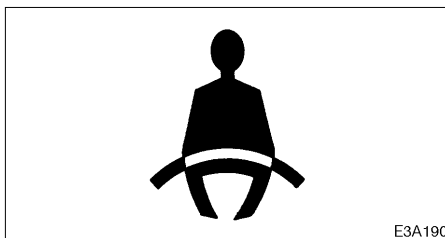


- Fasten the seat belt.
- Check that the parking device is applied and place all controls in the neutral position.
- Check that the safety lock lever is in the lock position.
- Clear the area of all persons.
- Start and operate the engine from the operator’s seat only.
- Never attempt to start the engine by shorting across the starter terminals.

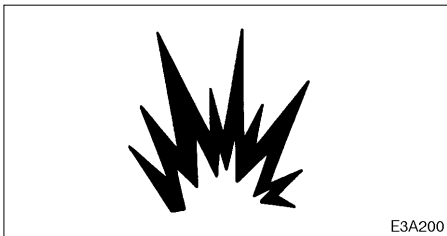**Starting with jumper cables**

Use jumper cables only in the recommended manner. Improper use of jumper cables can result in battery explosion or unexpected machine motion.

Refer to the section titled “If the Battery Goes Dead” for proper instructions.

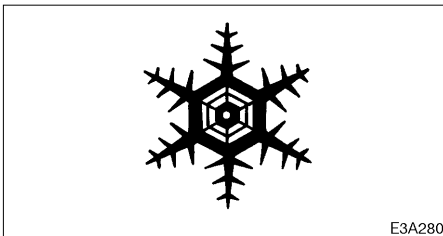In cold weather

- Be careful of slippery conditions on freezing ground, steps and hand holds.
- In severe cold weather, do not touch any metal parts of the machine with exposed flesh, as flesh can freeze to the metal and Cause injury.
- Do not use ether or starting fluids on this engine. These starting aids can cause explosion and serious injury or death.
- Warm up the engine and hydraulic fluid before operating.

After starting the engine

After starting the engine, perform the following operations and checks in a safe place with no persons or obstacles in the area. If any malfunctions are found, follow the shutdown procedure and report the malfunction.


- Warm up the engine and hydraulic fluid.
- Observe all gauges or warning instruments for proper operation.
- Listen for unusual noises.
- Test engine speed control.
- Operate each control to insure proper operation.

**Ensure good visibility**

- When working in dark places, turn on the machine's working lights and headlights and/or provide extra stationary lighting if necessary.
- When visibility is poor due to severe weather (fog, snow or rain), stop operating the machine and wait until conditions improves.

Do not permit riders on the machine


- Do not allow anyone to ride on any part of the machine at any time while traveling.
- Do not allow anyone to be on any part of the machine while operating.

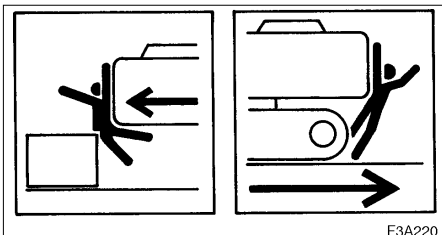Check for safety in the surrounding area before starting

- Understand the machine limitations.
- Use a signal person where clearances are close or your vision is obstructed.
- Never allow anyone to enter the slewing (swing) radius and machine path.
- Signal your intention to move by sounding the horn.
- There are blind spots to the rear of the machine.
If necessary, swing the cab around before backing up to check that the area is safe and clear.




Check the position of the undercarriage (tracks) before traveling

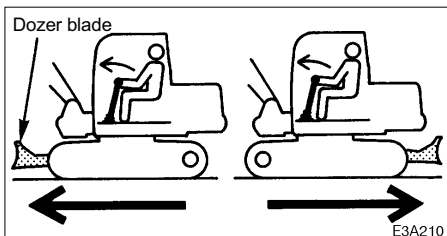


Before operating the travel levers, check to make sure that the dozer blade is to the front of the operator's seat. **BE AWARE** that when the dozer blade is to the rear of the operator's seat, the travel levers operate in the opposite direction to when the dozer blade is in the front.

Travel safety

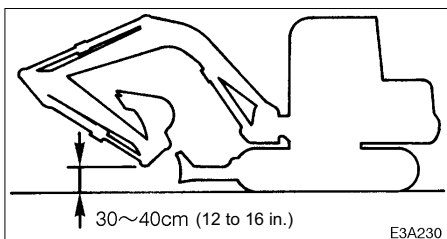

- Travel with the dozer blade up, the hoe attachment folded as shown on the diagram, and the bucket raised 30 to 40 cm (12 to 16 in.) from the ground.
- Note that when the bucket is operated while making a right pivot turn (i.e., when only the left crawler is turning), the speed of the pivot turn may suddenly increase.

- Do not slew (swing) while traveling. If you must operate the hoe attachment while traveling, operate at speeds slow enough so you have complete control at all times.
- When a load greater than a set value is applied during 2nd speed (high speed) travel, the speed will automatically slow down by switching to 1st speed (low speed). Thereafter, when the load becomes lighter, the speed will increase by returning to 2nd speed (high speed). Exercise due caution since the travel speed changes automatically.

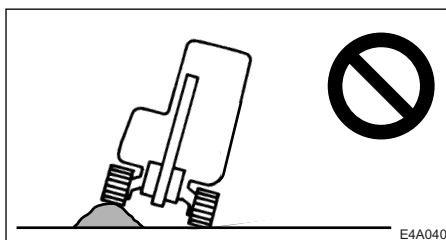

- Avoid crossing over obstacles whenever possible. If you must do so, keep the hoe attachment close to the ground and travel slowly. Never cross obstacles if they will seriously tilt the machine (to an angle of 15° or greater).
- On uneven ground, travel at low speed and avoid accelerating, stopping or changing directions abruptly.
- When roading a machine, know and use the signaling devices required on the machine. Provide an escort for road travel when required.





SAFETY

Operating Precautions


Cautions on traveling on slopes

When traveling on slopes or grades, be careful that the machine does not tip (roll) over or slide.

- Never exceed the machine's stability capabilities (maximum gradeability - 35°, lateral tipping angle - 15°). Also note that when actual working area conditions are poor the machine's stability capabilities may be lower.

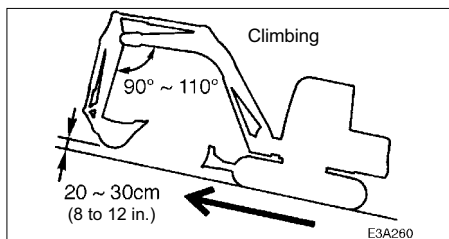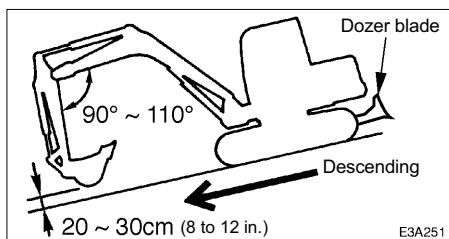


- When traveling on slopes or grades, lower the bucket to a height of 20 to 30 cm (8 to 12 in.) off the ground. In emergencies, lower the bucket to the ground and stop the machine.
- When traveling on slopes or grades, move slowly in first gear (low speed).
- Do not travel down slopes in reverse.
- On grass, dead leaves, wet metal or frozen surfaces, the machine may slide sideways even on very gentle slopes. Make sure the machine never faces sideways with respect to the slope.

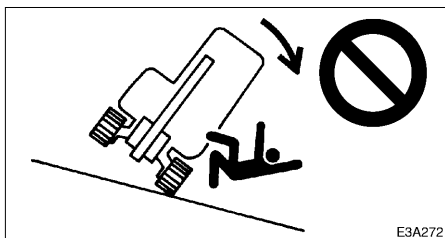

- Do not change directions or cross slopes sideways. First return to a flat surface then redirect the machine.


Operate on snow or ice with extra care

- When traveling on snow or frozen surfaces, keep the machine travel speed down and avoid accelerating, stopping or changing directions abruptly.
- Remember that the road shoulder, fences, etc., may be buried in the snow and not visible.
- Lower the dozer blade when parked on unsure ground conditions.

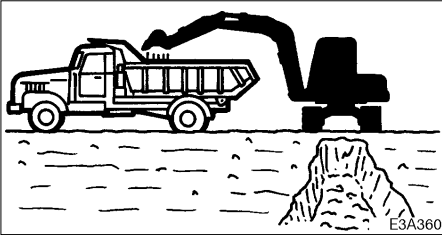**Insure driver safety before loading trucks**


Do not load a truck unless the driver is in a safe place.

- Never swing or position the bucket over personnel or truck cabs.
- Load the truck from the rear.

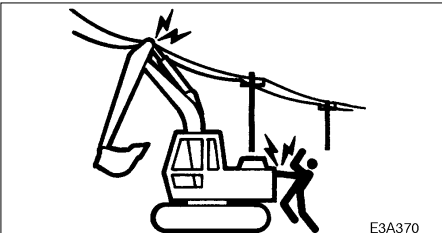Keep a safe distance from electrical power lines

Never approach power lines with any part of the machine and its load unless all local and national required safety precautions have been taken. Electrocutation and death can result from arcing, touching or even being close to a machine that is in contact with or near an electrical source.

- Maintain the maximum possible distance from power lines and never violate the minimum clearance.
- Always contact the nearest electric utility and determine jointly what specific precautions must be taken to insure safety.
- Consider all lines to be power lines and treat all power lines as energized even though it is known or believed that the power is shut off and the line is visibly grounded.
- Use a signal person to observe the approach of any part of the machine or load to the power line.
- Caution all ground personnel to stand clear of the machine and the load at all times.
- If the machine should come in contact with a live electrical source, do not leave the operator's seat. Do not allow anyone to approach or touch the machine.

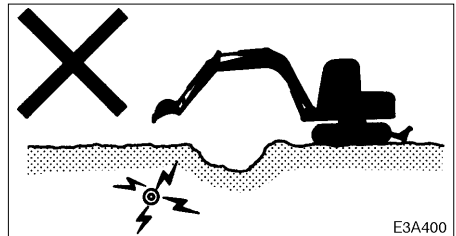


- Be especially careful of buried high voltage power lines.




SAFETY

Operating Precautions


Watch out for hazardous working conditions

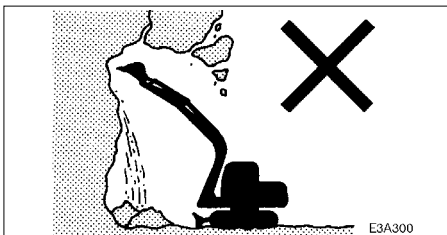

- Never undercut a high bank. Be particularly alert for the possibility of a cave-in.
- Do not operate in places where there is a danger of falling rocks.

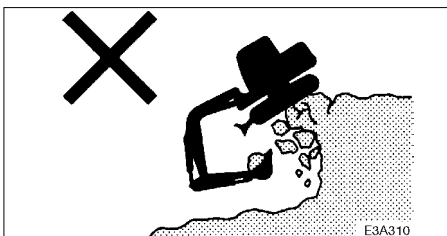

- Keep machine well back from the edge of an excavation. Avoid undercutting the machine.

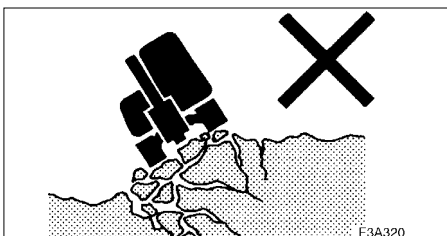


- Do not approach unstable surfaces (cliffs, road shoulders, deep trenches, etc.). The ground may give way under the machine's weight or vibrations, causing the machine to tip over.
 - The ground is weak after rain or explosions.


- The ground is also unstable on banks and near dugout trenches.

Operating on slopes is dangerous


When operating on slopes or grades, slewing (swinging) or operating working equipment may cause the machine to lose stability and tip over. Avoid operating on slopes whenever possible.

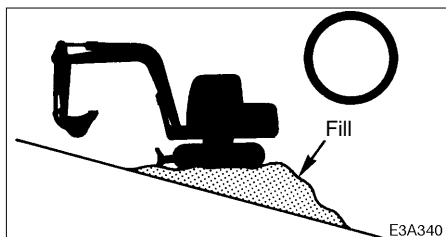

- Level off the work area.

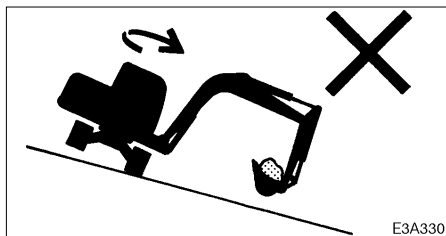


- Avoid swinging the loaded bucket in a downhill direction. This will reduce the stability of the machine.

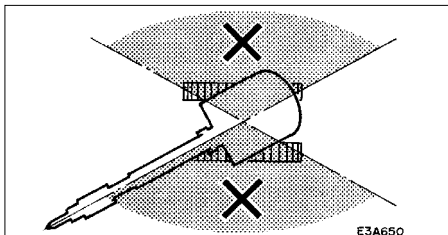
**Never slew (swing) sideways with excessive weights**

The machine can tip over more easily in the lateral direction than in the longitudinal direction.

- Do not slew (swing) sideways with excessive weight at the front.
In particular do not slew sideways on slopes.
- The front is heavier for machines equipped with breakers, crushers or telescopic arms than for machines equipped with the standard bucket. Do not operate such machines sideways especially with the digging arm (boom) downhill.

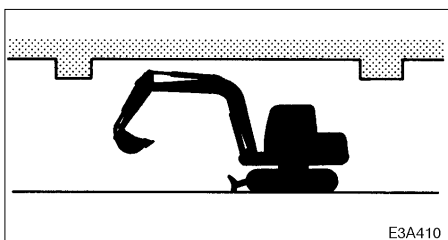Watch boom clearance

When operating under bridges, in tunnels, near power lines or indoors, be careful not to hit the boom or arm against overhead objects.

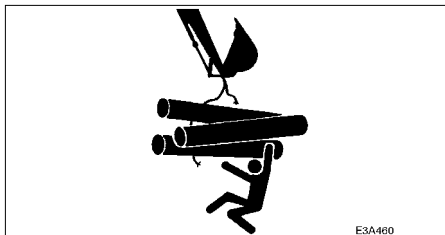Excavators are not designed for lifting loads

The machine is specifically designed for excavation work and has no safety devices for crane operation. Extreme caution should be used if the excavator is used for lifting.

- Never lift loads in excess of capacity.
Overload will cause the machine to roll and can result in serious injury or death.
- All rated lift capacities are based on the machine being level and on a firm supporting surface. For safe working loads, the user is expected to make due allowance for the particular job conditions such as soft or uneven ground, non-level condition, side loads, dynamic or jerked loads, hazardous conditions, experience of personnel, etc. The operator and other personnel should fully acquaint themselves with the operator's manual before operating this machine, and rules for safe operation of equipment shall be adhered to at all times.
- Failure of the bucket linkage or slings could result if chains or slings are incorrectly attached, resulting in serious injury or death.
- Do not attempt to pull stumps out of the ground while using the machine as a crane. The loads imposed on the machine under this use are completely unknown.
- Never allow any personnel to stand on or under lifted loads or even within the maneuvering area.




SAFETY


Operating Precautions

Danger of flying objects


- This machine is not equipped with protective guards to protect the operator from flying objects. Do not use the machine in places where there are risks of the operator being hit by flying objects.

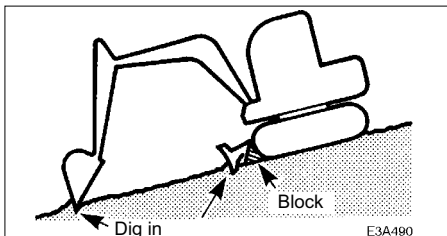**Park safely**

- Park the machine on firm, level ground and apply the parking device. If you must park on a slope or incline, block the machine securely to prevent movement.
- When parking on streets, use barriers, caution signs, lights, etc., so that the machine can easily be seen even at night to avoid collision with other vehicles.

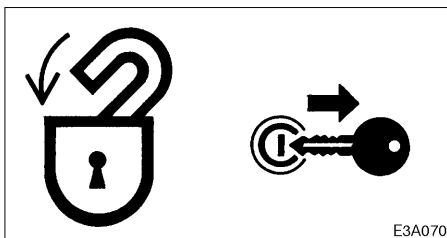

- Before leaving the machine, do the following:
 1. Lower the bucket and dozer blade to the ground.
 2. Place the safety lock lever in the lock position.
 3. Stop the engine and remove the key.
 4. Lock the cab and covers.

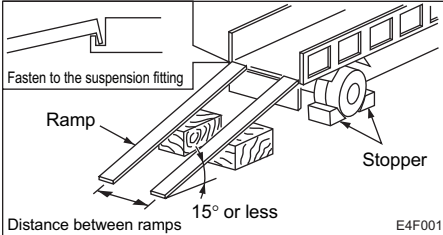**Load and unload the machine safely**

The machine may roll or tip over or fall while loading or unloading it. Take the following precautions:

- Select a firm, level surface and keep sufficient distance from road shoulders.
- Use loading ramps of adequate strength and size. Maintain the slope of loading ramps within 15 degrees.
- Secure the ramps to the truck bed.
- Keep the truck bed and loading ramps clean of oil, clay, ice, snow, and other materials which can become slippery. Clean the tracks.
- Block the transport vehicle so it can not move.
- Use a signal person when loading and unloading the machine, and travel slowly in first gear (low speed).
- Never change course on the ramp.
- Do not slew (swing) on ramps. The machine may tip over.
- When slewing (swinging) on the truck bed, do so slowly as the footing can be unstable.
- Engage the slew (swing) lock after loading.
- Block both tracks and secure the machine to the truck bed with load binders.

Transport the machine safely

- Know and follow the safety rules, vehicle code and traffic laws when transporting the machine.
- Consider the length, width, height and weight of the truck with the machine loaded on it when determining the best route.



SAFETY


Maintenance Precautions

Attach a “DO NOT OPERATE” tag

Severe injury could result if an unauthorized person should start the engine or touch controls during inspection or maintenance.

- Stop the engine and remove the key before performing maintenance.
- Attach a “DO NOT OPERATE” tag to the starter switch or control lever.

Use the correct tools

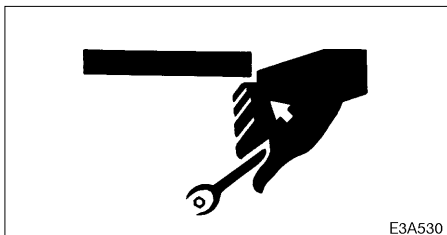

Do not use damaged or weakened tools or tools designed for other purposes. Use tools suited for the operation at hand.

Replace important safety parts periodically


- Replace fuel hoses periodically. Fuel hoses become weaker over time, even if they appear to be in good shape.
- Replace important safety parts whenever an irregularity is found, even if it is before the normal time for replacement. Refer to the section titled Important Parts for further details.

Anti-explosive lighting



Use anti-explosive electrical fixtures and lights when inspecting fuel, oil, coolant, battery fluid, etc. If lighting that is not anti-explosive should break, the substance could ignite, resulting in serious injury or death.

Do not allow unauthorized personnel in the work area

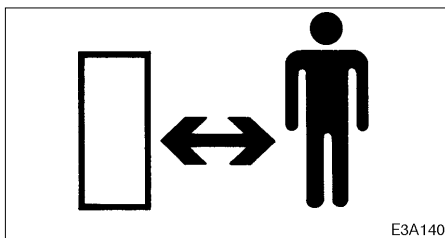

Do not allow unauthorized personnel in the work area. Chips or other debris can fly off machine parts when grinding, welding or using a hammer.




Prepare the work area

- Select a firm, level work area. Make sure there is adequate light and, if indoors, ventilation.
- Clear obstacles and dangerous objects. Eliminate slippery areas.

Stop the engine before performing maintenance


- Avoid lubrication or mechanical adjustments with the machine in motion or with the engine running while stationary.
- If maintenance must be performed with the engine running, always work as a 2-person team with one person sitting in the operator's seat while the other works on the machine.
 - When performing maintenance, be sure to keep your body and clothing away from moving parts.

Always clean the machine

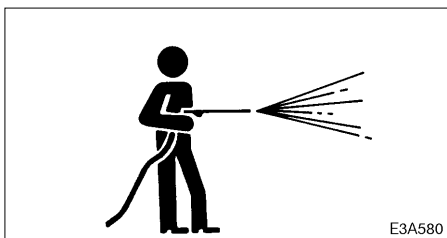

- Clean the machine before performing maintenance.
- Cover electrical parts when washing the machine. Water on electrical parts could cause short-circuits or malfunctions. Do not use water or steam to wash the battery, sensors, connectors or the operator's seat area.

Stay clear of moving parts

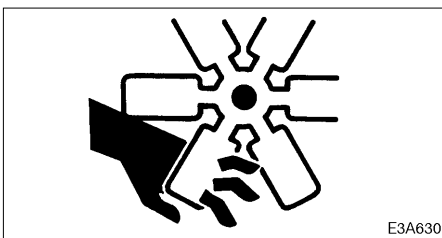

- Stay clear of all rotating and moving parts. Wrapping or entanglement may result in serious injury or death.
- Keep hands, clothing and tools away from the rotating fan and running fan belts.



SAFETY

Maintenance Precautions

Product Manual: Takeuchi TB175 Compact Excavator Operators Manual(Book No. AL3E008)

Full Download: <https://www.aresairmanual.com/downloads/takeuchi-tb175-compact-excavator-operators-manualbook-no-al3e008/>

Securely block the machine or any component that may fall



- Before performing maintenance or repairs under the machine, set all working equipment against the ground or in the lowermost position.
- Securely block the tracks.
- If you must work beneath the raised machine or equipment, always use wood blocks, jack-stands or other rigid and stable supports. Never get under the machine or working equipment if they are not sufficiently supported. This procedure is especially important when working on hydraulic cylinders.

Cautions on working on the machine



- When performing maintenance on the machine, clean up the foot area and strictly observe the following so as not to fall:
 - Do not spill oil or grease.
 - Do not leave tools laying around.
 - When walking, watch your step.
- Never jump off the machine. Use the steps and handrails when climbing on and off the machine, and always support your body at three points with your hands and feet.
- Use protective equipment as required by job conditions.

Securely block the working equipment

To prevent unexpected movement, securely block the working equipment when repairing or replacing the cutting edges or bucket teeth.

Secure the engine hood or cover when opened

Be sure to secure the engine hood or cover when opening it. Do not open the engine hood or cover on slopes or in strong wind.

Place heavy objects in a stable position



When removing or installing the hoe attachment, place it in a stable position so

Simple manual Download All 219 pages at <https://www.aresairmanual.com/downloads/takeuchi-tb175-compact-excavator-operators-manualbook-no-al3e008/>