

Document Title: Machine description	EW160B, 000	Function Group:	000	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo					

Machine EW160B, description

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

EW160B is a wheeled excavator with a 360 degree slew movement and a total weight of 16 400 kg.

The machine is equipped with a computerized monitoring system, vehicle control unit (V-ECU) which in turn monitors and controls the engine control unit (E-ECU) and the transmission control unit (T-ECU). Errors that occurs in the system results in an error code which is shown in the instrument control unit (I-ECU).

The machine is equipped with a Volvo Cologne D6D low-emission diesel engine, which is adapted for this excavator model. The engine is controlled by an engine control unit (E-ECU).

The diesel engine drives the working pump, which gives hydraulic flow to the working hydraulics and the travel motor. One part of a double gear pump supplies the servo hydraulics and cooling fan for hydraulic oil cooler with hydraulic flow. The other part, brake and steering circuit with hydraulic flow. The brake circuit has priority over the steering circuit. The tandem pump is mounted on the right side of the engine, on the PTO output. The hydraulic system is monitored and controlled by the transmission control unit (T-ECU).

The machine has a load-sensing hydraulic system which always ensures that each movement receives oil according to the demand.

Propulsion of the machine is obtained with a hydraulic travel motor.

The travel gearbox is equipped with negative-action hydraulic brake. The brake is applied automatically by spring force and released with servo pressure.

The superstructure is slewed using an axial piston motor. The slew brake is negative and is applied automatically by spring force and released with the system pressure.

The slew pinion drives against a slew ring with internal ring gear. The slew ring connects the superstructure with the undercarriage.

A centre passage connects the superstructure and undercarriage hydraulically and electrically.

The cab is equipped with an ergonomic operator's seat, ventilation and filtration system. The cab is prepared for air conditioning.

The boom cylinders are provided with one line rupture valve each.

Different combinations of boom, dipper arm and attachments can be offered. This manual describes the most common standard alternatives.


When ordering spare parts and making enquiries on the telephone or by correspondence, the model designation and serial number should be given. When applicable, the information stamped on individual parts should also be given.

Document Title: Component locations	Function Group: 000	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Component locations

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

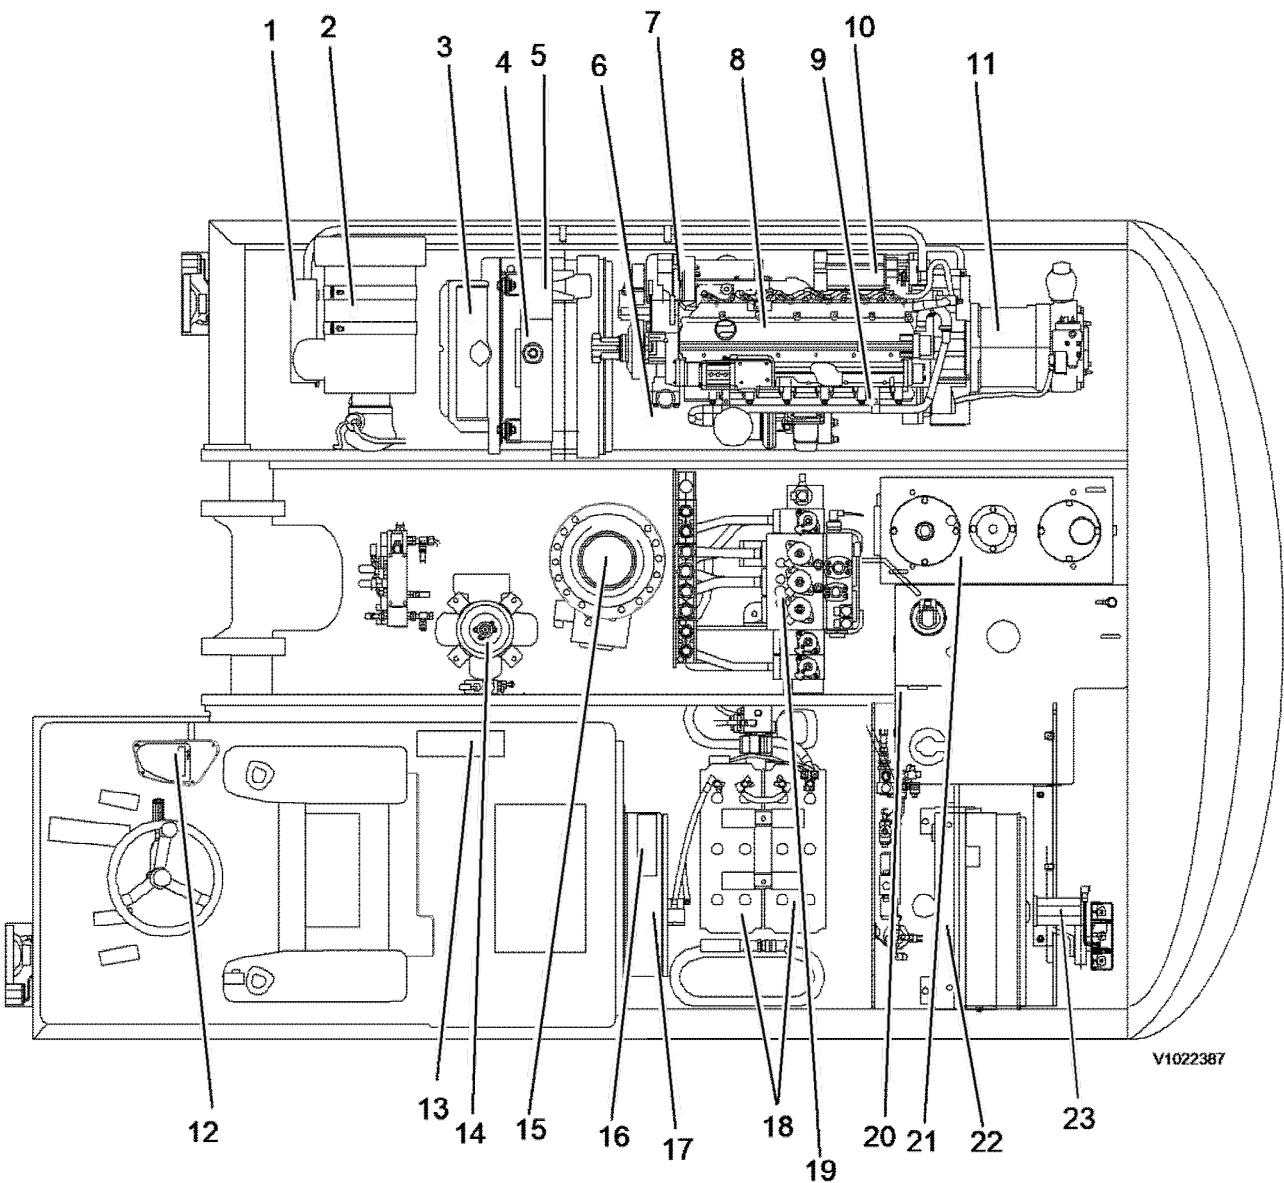

V1022387

Figure 1

Component position

2. Air filter	14. Centre passage
3. Expansion tank	15. Slew unit
4. Radiator	16. Transmission control unit (T-ECU)
5. Intercooler	17. Fuse box
6. AC compressor	18. Batteries
7. Alternator	19. Main valve block
8. Diesel engine	20. Diesel tank
9. Starter motor	21. Hydraulic oil tank
10. Servo pump	22. Condenser
11. Working pump	23. Hydraulic oil cooler
12. Instrument control unit (I-ECU)	

Document Title: Product plates	Function Group: 000	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Product plates

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

When ordering spare parts, and in all telephone enquiries or correspondence the model designation and the Product Identification Number (PIN) must always be quoted.

Product plate

The product plate on the machine shows the manufacturer's name and address, model designation, PIN, machine weight, engine output, production year and year of delivery. There is also room for the CE mark. The plate is positioned under the boom on the superstructure frame.

Engine product plate

The engine product plate contains type designation and part and serial numbers and is positioned on the engine inside the rear engine cover on the right side of the machine.

Travel gearbox product plate

The gearbox product plate contains type designation and part and serial numbers and is positioned on the travel gearbox.

Axle product plate

The axle product plate contains type designation and part and serial numbers and is positioned on each axle.

Document Title: Volvo standard tightening torques	Function Group: 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Volvo standard tightening torques

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

The tightening torques in the following tables apply to bolts and nuts with tensile strength. The tables should be used as a general instruction for tightening bolts and nuts without specified values. The charts contains values for course thread bolts and nuts.

Torque values should be increased with $\approx 10\%$, for flange bolts.

All standard torques for bolts are without surface treatment.

The standard torque for bolts lubricated with oil should be reduced with 20% of the given value.

Standard tightening torque charts

Bolt size Metric Coarse Threads	Tensile strength 8.8		Tensile strength 10.9	
	(Nm)	(lbf ft)	(Nm)	(lbf ft)
M5	6	4	8	6
M6	10	7	14	11
M8	25	18	35	26
M10	50	37	70	52
M12	87	64	122	90
M14	139	103	195	144
M16	213	157	299	220
M18	293	216	413	305
M20	416	307	585	432
M24	719	530	1010	745
M27	1060	782	1490	1100
M30	1140	840	2025	1493
M36	2500	1844	3600	2653

Bolt size Inch SAE Coarse Threads	Tensile strength 5		Tensile strength 8	
	(lbf ft)	(Nm)	(lbf ft)	(Nm)
1/4	10	13,6	14	19
5/16	21	28,5	29	39,3
3/8	37	50,2	52	70
7/16	59	80	84	114
1/2	90	122	128	174
9/16	130	176	184	250
5/8	180	244	254	345

3/4	320	434	451	612
7/8	515	700	728	988
1	775	1052	1091	1480
1 1/8	953	1290	1545	2100
1 1/4	1344	1823	2180	2960
1 3/8	1600	2170	2650	3600
1 1/2	2000	2714	3200	4340


Document Title: Tightening torques	Function Group: 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Tightening torques

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

Wheel nuts


Wheel nuts		
		
Thread M	Wrench size (width across flats)	Tightening torque (Nm)
M22 x 1.5	30	560 – 600

Hydraulic connections, general

Before fitting pipe couplings, plugs and hoses:


- Make sure that the sealing surfaces are clean and free from pores or scratches.
- Check elastic seal rings for defects.
- Oil in threads, sealing surfaces and contact surfaces except for ORFS-connections (ORFS = O-Ring Face Seal).

Valve connections

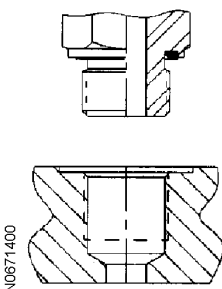Valve connections, ORFS-connections with ED seals (DIN 3852 form E)		
		
Connection thread (mm)	Wrench size, width across flats (mm)	Tightening torque (Nm)
M10 x 1.0		19
M12 x 1.5	17	37
M14 x 1.5	22	58
M16 x 1.5	22	74
M18 x 1.5	24	94
M20 x 1.5		130
M22 x 1.5	27	140
M27 x 2.0	32	190
M33 x 2.0	41	330

M42 x 2.0	50	470
M48 x 2.0	55	570
Connection thread (inches)	Wrench size, width across flats (mm)	Tightening torque (Nm)
G 1/8	17 alt. 19	19
G 1/4	19 alt. 22	58
G 3/8	22 alt. 27	84
G 1/2	27 alt. 32	120
G 3/4	32 alt. 41	190
G 1	41 alt. 46	330
G 1 1/4	50	470
G 1 1/2	55	570


Valve connections, ORFS-connections with O-ring seals (ISO 6149)



Connection thread (mm)	Wrench size, width across flats (mm)	Tightening torque (Nm)
M8 x 1.0		11
M10 x 1.0		21
M12 x 1.5	17 alt. 19	37
M14 x 1.5	19 alt. 22	47
M16 x 1.5	22	58
M18 x 1.5	24 alt. 27	74
M22 x 1.5	27 alt. 32	110
M27 x 2.0	32	180
M33 x 2.0	32, 41 alt. 46	330
M42 x 2.0	50	350
M48 x 2.0	55	440
Connection thread (inches)	Wrench size, width across flats (mm)	Tightening torque (Nm)
7/16 – 20 UNF	16	21
1/2 – 20 UNF		26
9/16 – 18 UNF	19	37
3/4 – 16 UNF	22	74
7/8 – 14 UNF	27	110
1 1/16 – 12 UNF	41	180
1 5/16 – 12 UNF	41	284
1 5/8 – 12 UNF	50	300
1 7/8 – 12 UNF	55	390


Blanking plugs

Blanking plugs with ED seal



Connection thread (mm)	Allen key dim. (mm)	Tightening torque (Nm)
M10 x 1.0	5	12
M12 x 1.5	6	25
M14 x 1.5	6	35
M16 x 1.5	8	55
M18 x 1.5	8	65
M20 x 1.5	10	80
M22 x 1.5	10	90
M26 x 1.5	12	100
M27 x 2.0	12	140
M33 x 2.0	17	230
M42 x 2.0	22	360
M48 x 2.0	24	360
Connection thread (inches)	Allen key dim. (mm)	Tightening torque (Nm)
G 1/8	5	13
G 1/4	6	30
G 3/8	8	60
G 1/2	10	80
G 3/4	12	140
G 1	17	200
G 1 1/4	22	400
G 1 1/2	24	450


Blanking plugs with O-ring seal (ISO 6149)



Connection thread (mm)	Allen key dim. (mm)	Tightening torque (Nm)
M10 x 1.0	5	20
M12 x 1.5	6	35
M14 x 1.5	6	45
M16 x 1.5	8	55
M18 x 1.5	8	70
M20 x 1.5	10	80
M22 x 1.5	10	100
M26 x 1.5	12	130
M27 x 2.0	12	170
M33 x 2.0	14	310
M42 x 2;0	22	330

ORFS-connections


ORFS-connections (ISO 8434-3)

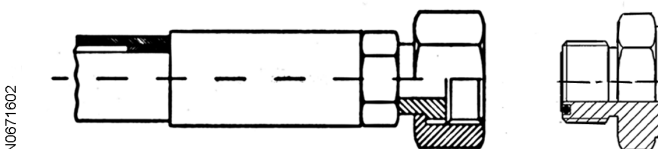

Thread (inches)	Wrench size, width across flats (mm)	Tightening torque (Nm) *
-----------------	--------------------------------------	--------------------------

9/16 – 18 UNF	17 alt. 19	25
11/16 – 16 UN	22	35
13/16 – 16 UN	24	55
1 – 14 UNS	30	85
1 3/16 – 12 UN	36	120
1 7/16 – 12 UN	41 alt. 46	160
1 11/16 – 12 UN	50	200
2 – 12 UN	60	260
* Threads and sealing surface must not be oiled in before tightening.		

Hose clamps

Hose clamps with worms		
		
Intended for hose outside diameter (mm)	Wrench size, width across flats (mm)	Tightening torque (Nm)
10 – 19	7	2.5
20 – 30	7	3.5
31 – 49	7	4.5
50 – 231	7	5.5

Bolts and nuts

The pretensioning force achieved at a given tightening torque depends on the coefficient of friction of the bolted joint. The coefficient of friction in turn depends on the surface texture, surface treatment and lubricated condition. The values are calculated assuming a coefficient of friction of 0.2 for a dry chromated flange bolt and 0.15 for a lubricated chromated flange bolt. The lower torque for Allen bolts and traditional hex bolts, in relation to flange bolts, is due to the shorter torque arm for the frictional force under the bolt head (smaller diameter of bolt head).

The following abbreviations for surface treatment are used in the tables:

- Fe/Zn-Fe = Black chromated zinc - iron
- FZB = Blank chromated

NOTE!


In some body parts, there are weld bolts with much lower strength than normal bolts of the same dimension.

NOTE!

When Nordloc washer is used, increase the torque by 20%.


NOTE!

Bolts provided with liquid alt. micro-capsuled thread locker or thread sealant shall be tightened with the same torque as a lubricated bolt of the same type.


Flange bolts						
						Blind rivet nut
Thread (mm)	Wrench size, width across flats (mm)	Torque (Nm)				Torque (Nm)
		8.8 Fe/Zn-Fe Dry	8.8 Fe/Zn-Fe Lubricated	10.9 Phosphated	10.9 Phosphated Lubricated	Dry

M5	8	7	6			6
M6	10	12	10			10
M8	12	28	24			24
M10	14	56	48	70	60	48
M12	17	100	85	125	105	82
M14	18	160	140	200	175	
M16	21	250	220	320	275	

Hex bolts and Allen head bolts

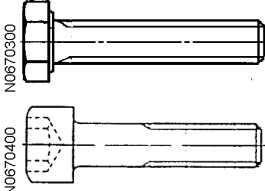							Blind rivet nut
	Wrench size (width across flats)		Torque (Nm)				Torque (Nm)
Thread (mm/inch)	Hex bolt (mm/inch)	Allen head bolt (mm/inch)	8.8 FZB & Fe/Zn-Fe Dry	8.8 FZB & Fe/Zn-Fe Lubricated	10.9 Phosphated Lubricated	12.9 Untreated Lubricated	Dry
M5	8	4	6	5			6
M6	10	5	10	9		20	10
M8	13	6	25	22		40	24
M10	16	8	50	44	60	80	48
M12	18	10	90	75	105	140	82
M14	21	12	140	125	175	220	
M16	24	14	220	190	275	340	
M20	30	17	450	380	540	650	
M24	36	19	770	660	900	1 120	
M27	41	–	1 100	940	1 350	1 620	
M30	46	22	1 500	1 280	1 840	2 210	
M36	55		2 500	2 300	3 210	3 850	
1/4 UNC	7/16	3/16	12	10	15	20	
5/16 UNC	1/2	1/4	25	21	30	40	
3/8 UNC	9/16	5/16	45	38	55	70	
7/16 UNC	5/8		65	55	90		
1/2 UNC	3/4	3/8	100	85	130	170	
9/16 UNC	13/16		145	123	190		

Nuts on weld bolts (material S235JRG2-EN 10025)

	
Thread	Torque (Nm)
M6	5
M8	12

Tolerances

Modern high-quality torque wrenches normally give a variation of $\pm 5\%$ of the indicated value. This, together with variations in friction coefficient, gives a range in the pretensioning force of approximately $\pm 16\%$ for lubricated bolted joints and $\pm 29\%$

% for dry bolted joints.

Document Title: Conversion tables	Function Group: 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Conversion tables

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

Length

Unit	cm	m	km	in	ft	yd	mile
cm	1	0.01	0.00001	0.3937	0.03281	0.01094	0.000006
m	100	1	0.001	39.37	3.2808	1.0936	0.00062
km	100000	1000	1	39370.7	3280.8	1093.6	0.62137
in	2.54	0.0254	0.000025	1	0.08333	0.02777	0.000015
ft	30.48	0.3048	0.000304	12	1	0.3333	0.000189
yd	91.44	0.9144	0.000914	36	3	1	0.000568
mile	160930	1609.3	1.6093	63360	5280	1760	1

1 mm = 0.1 cm - 1 mm = 0.001 m

Area

Unit	cm ²	m ²	km ²	a	ft ²	yd ²	in ²
cm ²	1	0.0001	-	0.000001	0.001076	0.000012	0.155000
m ²	10000	1	0.000001	0.01	10.764	1.1958	1550.000
km ²	-	1000000	1	10000	1076400	1195800	-
a	0.01	100	0.0001	1	1076.4	119.58	-
ft ²	-	0.092903	-	0.000929	1	0.1111	144.000
yd ²	-	0.83613	-	0.008361	9	1	1296.00
in ²	6.4516	0.000645	-	-	0.006943	0.000771	1

1 ha = 100 a - 1 mile² = 259 ha = 2.59 km²

Volume

Unit	cm ³ = cc	m ³	l	in ³	ft ³	yd ³
cm ³ = ml	1	0.000001	0.001	0.061024	0.000035	0.000001
m ³	1000000	1	1000	61024	35.315	1.30796
dm ³ (l)	1000	0.001	1	61.024	0.035315	0.001308
in ³	16.387	0.000016	0.01638	1	0.000578	0.000021
ft ³	28316.8	0.028317	28.317	1728	1	0.03704
yd ³	764529.8	0.76453	764.53	46656	27	1

1 gal (US) = 3785.41 cm³ = 231 in³ = 0.83267 gal (UK)

Weight

Unit	g	kg	t	oz	lb
g	1	0.001	0.000001	0.03527	0.0022
kg	1000	1	0.001	35.273	2.20459
t	1000000	1000	1	35273	2204.59
oz	28.3495	0.02835	0.000028	1	0.0625
lb	453.592	0.45359	0.000454	16	1

1 ton (metric) = 1.1023 ton (US) = 0.9842 ton (UK)

Pressure

Unit	kp/cm ²	bar	Pa=N/m ²	kPa	lbf/in ²	lbf/ft ²
kp/cm ²	1	0.98067	98066.5	98.0665	14.2233	2048.16
bar	1.01972	1	100000	100	14.5037	2088.6
Pa=N/m ²	0.00001	0.001	1	0.001	0.00015	0.02086
kPa	0.01020	0.01	1000	1	0.14504	20.886
lbf/in ²	0.07032	0.0689	6894.76	6.89476	1	144
lbf/ft ²	0.00047	0.00047	47.88028	0.04788	0.00694	1

kg/cm² = 735.56 Dry (mmHg) = 0.96784 atm

Unit explanations

Unit	abbreviation
Newton meter	Nm
Kilopoundmeter	kpm
Kilopascal	kPa
Megapascal	MPa
Kilowatt	kW
kilojoule	kJ
British thermal unit	Btu
Calorie	ca

Approx. conversion

SI unit	Conversion factor	Non SI	Conversion factor	SI
Torque				
Nm	x10.2	=kg/cm	x0.8664	=lb in
Nm	x0.74	=lbf-ft	x1.36	=Nm
Nm	x0.102	=kg/m	x7.22	=lbft
Pressure (Pa = N/m²)				
kPa	x4.0	=in.H ₂ O	x0.249	=kPa
kPa	x0.30	=in.Hg	x3.38	=kPa
kPa	x0.145	=psi	x6.89	=kPa
bar	x14.5	=psi	x0.069	=bar
kp/cm ²	x14.22	=psi	x0.070	=kp/cm ²
N/mm ²	x145.04	=psi	x0.069	=bar
MPa	x145	=psi	x0.00689	=MPa
Power (W = J/s)				
kW	x1.36	=hp(cv)	x0.736	=kW

kW	x1.34	= bhp	x0.746	= kW
kW	x0.948	= Btu/s	x1.055	= kW
W	x0.74	= ft-lb/s	x1.36	= W
Energy (J = Nm)				
kJ	x0.948	= Btu	x1.055	= kJ
J	x0.239	= calorie	x4.19	= J
Speed and acceleration				
m/s ²	x3.28	= ft/s ²	x0.305	= m/s ²
m/s	x3.28	= ft/s	x0.305	= m/s
km/h	x0.62	= mph	x1.61	= km/h
Horsepower/torque				
Bhp x5252 rpm = TQ (lb-ft)			TQ x rpm 5252 = bhp	
Temperature				
$^{\circ}\text{C} = (^{\circ}\text{F} - 32) / 1.8$			$^{\circ}\text{F} = (^{\circ}\text{C} \times 1.8) + 32$	
Flow factor				
l/min (dm ³ /min)	x0.264	= US gal/min	x3.785	= liter/min

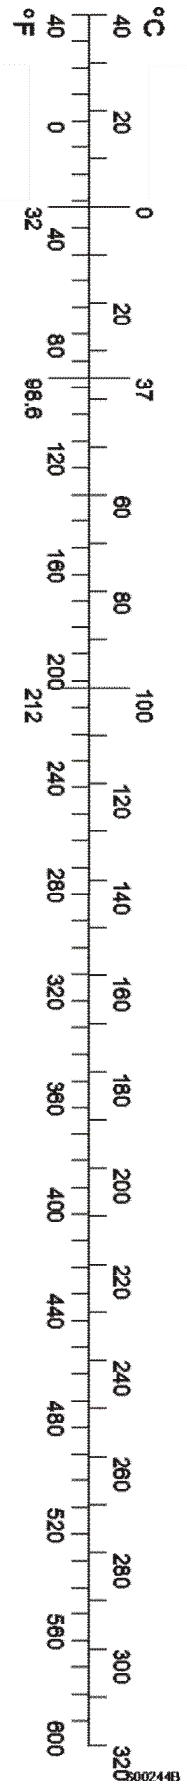


Figure 1

Document Title: Capacities	Function Group: 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Capacities

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

Volumes	
Engine oil	25 l (6.6 US gal)
Fuel tank	250 l (66 US gal)
Electrically driven fuel filling pump, flow capacity at 3 m height	50 l/min (13.2 US gal/min)
Cooling system (incl. glycol)	22 l (5.8 US gal)
Hydraulic system, total	260 l (68.7 US gal)
Hydraulic oil tank	135 l (35.7 US gal)
Travel gearbox	2.9 l (0.8 US gal)
Rear axle, wet disc brakes	11 l (2.9 US gal)
Rear axle, drum brakes	11 l (2.9 US gal)
Front axle	8.5 l (2.3 US gal)
Hub reduction gears, wet discs	2.0 l (0.5 US gal)
Hub reduction gears, drum discs	1.1 l (0.3 US gal)

Document Title: Dimensions	Function Group: 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Dimensions

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

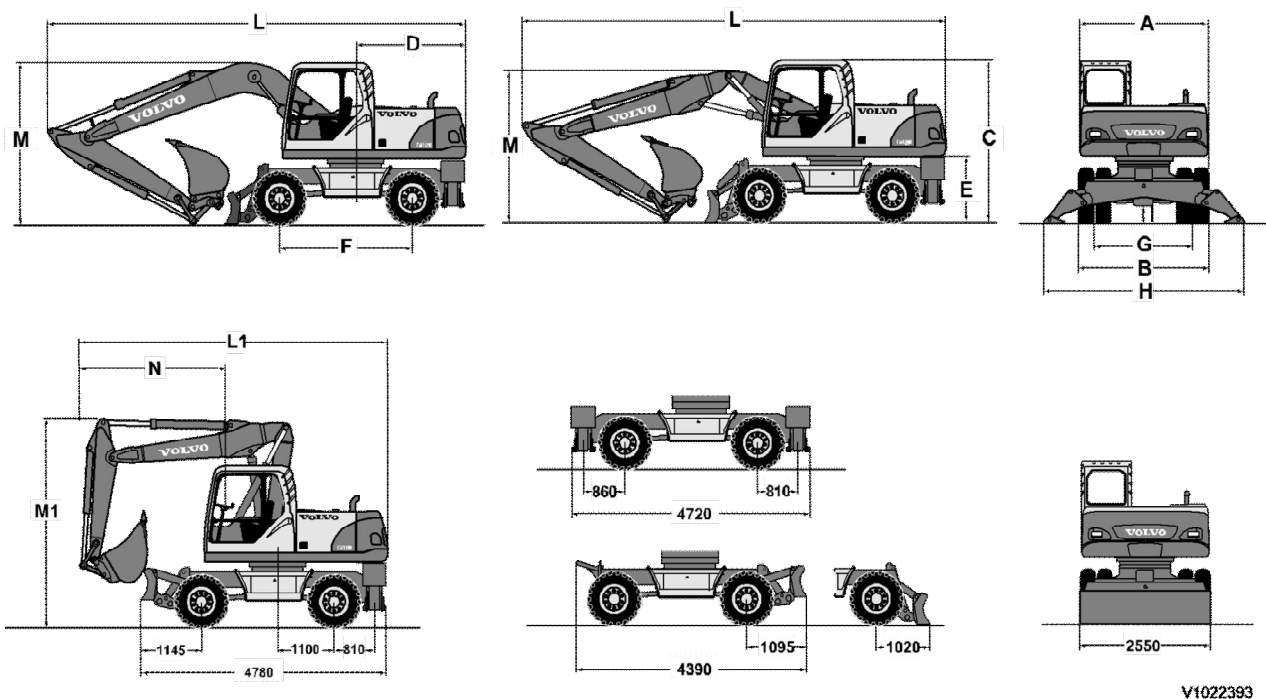


Figure 1
Dimensions

Description	Mono boom 5.0 m (16 ft 4.9 in)	2-piece boom 5.1 m (16 ft 8.8 in)
A. Overall width of superstructure	2500 mm (8 ft 2.4 in)	2500 mm (8 ft 2.4 in)
B. Overall width	2540 mm (8 ft 4.0 in)	2540 mm (8 ft 4.0 in)
C. Overall height of cab	3110 mm (10 ft 2.1 in)	3110 mm (10 ft 2.1 in)
D. Tail slew radius	2150 mm (7 ft 0.6 in)	2150 mm (7 ft 0.6 in)
E. Counterweight clearance	1270 mm (4 ft 2.0 in)	1270 mm (4 ft 2.0 in)
F. Wheel base	2600 mm (8 ft 6.4 in)	2600 mm (8 ft 6.4 in)
G. Tread	1915 mm (6 ft 3.4 in)	1915 mm (6 ft 3.4 in)
H. Stabiliser blade width, down (front or rear)	3920 mm (12 ft 10.3 in)	3920 mm (12 ft 10.3 in)
I. Minimum ground clearance	325 mm (1 ft 0.8 in)	325 mm (1 ft 0.8 in)

Mono Boom 5.0 m (16 ft 4.9 in)

	Dipper arm length				
	2.0 m (6 ft 6.7 in)	2.45 m (8 ft 0.5 in)	2.6 m (8 ft 6.4 in)	3.1 m (10 ft 2.0 in)	3.0 m [1] (9 ft 10.1 in)
L. Overall length	8180 mm (26 ft 10.0 in)	8200 mm (26 ft 10.8 in)	8190 mm (26 ft 10.4 in)	8000 mm (26 ft 3.0 in)	8205 mm (26 ft 11.0 in)
M. Overall height of boom	2990 mm (9 ft 9.8 in)	3160 mm (10 ft 4.4 in)	3260 mm (10 ft 8.4 in)	3620 mm (11 ft 10.5 in)	3175 mm (10 ft 5.0 in)

2-piece boom 5.1 m (16 ft 8.8 in)

	Dipper arm length				
	2.0 m (6 ft 6.7 in)	2.45 m (8 ft 0.5 in)	2.6 m (8 ft 6.4 in)	3.1 m (10 ft 2.0 in)	3.0 m [2] (9 ft 10.1 in)
L. Overall length	8290 mm (27 ft 2.4 in)	8310 mm (27 ft 3.2 in)	8290 mm (27 ft 2.4 in)	8070 mm (26 ft 5.7 in)	8310 mm (27 ft 3.2 in)
M. Overall height of boom	6110 mm (20 ft 0.6 in)	6170 mm (20 ft 2.9 in)	6170 mm (20 ft 2.9 in)	7420 mm (24 ft 4.1 in)	6530 mm (21 ft 5.1 in)
L1. Overall length	2890 mm (9 ft 5.8 in)	2940 mm (9 ft 7.8 in)	3050 mm (10 ft 0.1 in)	3450 mm (11 ft 3.8 in)	2945 mm (9 ft 8.0 in)
M1. Overall height of boom	4000 mm (13 ft 1.5 in)	4000 mm (13 ft 1.5 in)	4000 mm (13 ft 1.5 in)	4000 mm (13 ft 1.5 in)	4000 mm (13 ft 1.5 in)
N. Front overhang	2920 mm (9 ft 7.0 in)	2980 mm (9 ft 9.3 in)	2970 mm (9 ft 8.9 in)	4230 mm (13 ft 10.5 in)	3450 mm (11 ft 3.8 in)

[1]dipper arm for grab

[2]dipper arm for grab

Document Title: Engine, weights	Function Group: 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Engine, weights

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			


Engine, dry, approx.	495 kg (1091 lbs)
----------------------	-------------------

Document Title: Digging diagram	Function Group: 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Digging diagram

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

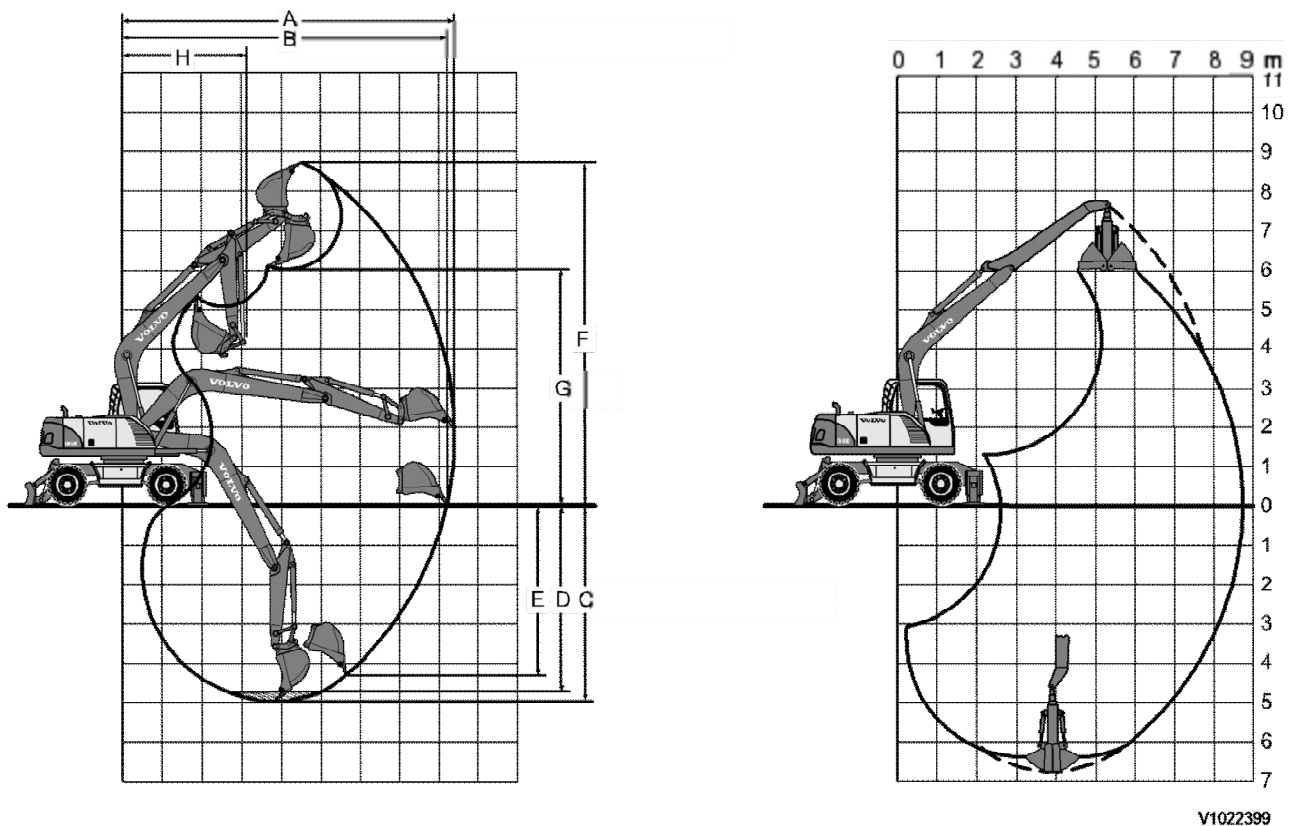

V1022399


Figure 1

Digging diagram, mono boom

Mono boom 5.0 m (16 ft 4.9 in)

Dipper arm	2.0 m (6 ft 6.8 in)	2.45 m (8 ft 0.5 in)	2.6 m (8 ft 6.4 in)	3.1 m (10 ft 2 in)	3.0 m[1] (9 ft 10.1 in)
A. Maximum digging reach	8.5 m (27 ft 10.6 in)	9.0 m (29 ft 6.3 in)	9.1 m (29 ft 10.3 in)	9.6 m (31 ft 6 in)	8.8 m (28 ft 10.5 in)
B. Maximum digging reach at ground level	8.3 m (27 ft 3.8 in)	8.8 m (28 ft 10.5 in)	8.9 m (29 ft 2.4 in)	9.4 m (30 ft 10.1 in)	8.8 m (28 ft 10.5 in)
C. Maximum digging depth	5.1 m (16 ft 8.8 in)	5.5 m (18 ft 0.5 in)	5.6 m (18 ft 4.5 in)	6.2 m (20 ft 4.1 in)	6.7 m (21 ft 11.8 in)
D. Maximum digging depth (2440 mm level)	4.8 m (15 ft 9.0 in)	5.3 m (17 ft 4.7 in)	5.4 m (17 ft 8.6 in)	6.0 m (19 ft 8.2 in)	-

E. Maximum vertical wall digging depth	4.3 m (14 ft 1.3 in)	4.6 m (15 ft 1.1 in)	4.7 m (15 ft 5.0 in)	5.1 m (16 ft 8.8 in)	6.7 m (21 ft 11.8 in)
F. Maximum cutting height	8.8 m (28 ft 10.5 in)	9.0 m (29 ft 6.3 in)	9.1 m (29 ft 10.3 in)	9.4 m (30 ft 10.1 in)	5.9 m (19 ft 4.3 in)
G. Maximum dumping height	6.0 m (19 ft 8.2 in)	6.2 m (20 ft 4.1 in)	6.3 m (20 ft 8.0 in)	6.6 m (21 ft 7.8 in)	5.5 m (18 ft 0.5 in)
H. Minimum front slew radius	3.1 m (10 ft 2.0 in)	3.1 m (10 ft 2.0 in)	3.1 m (10 ft 2.0 in)	3.1 m (10 ft 2.0 in)	3.6 m (11 ft 9.7 in)

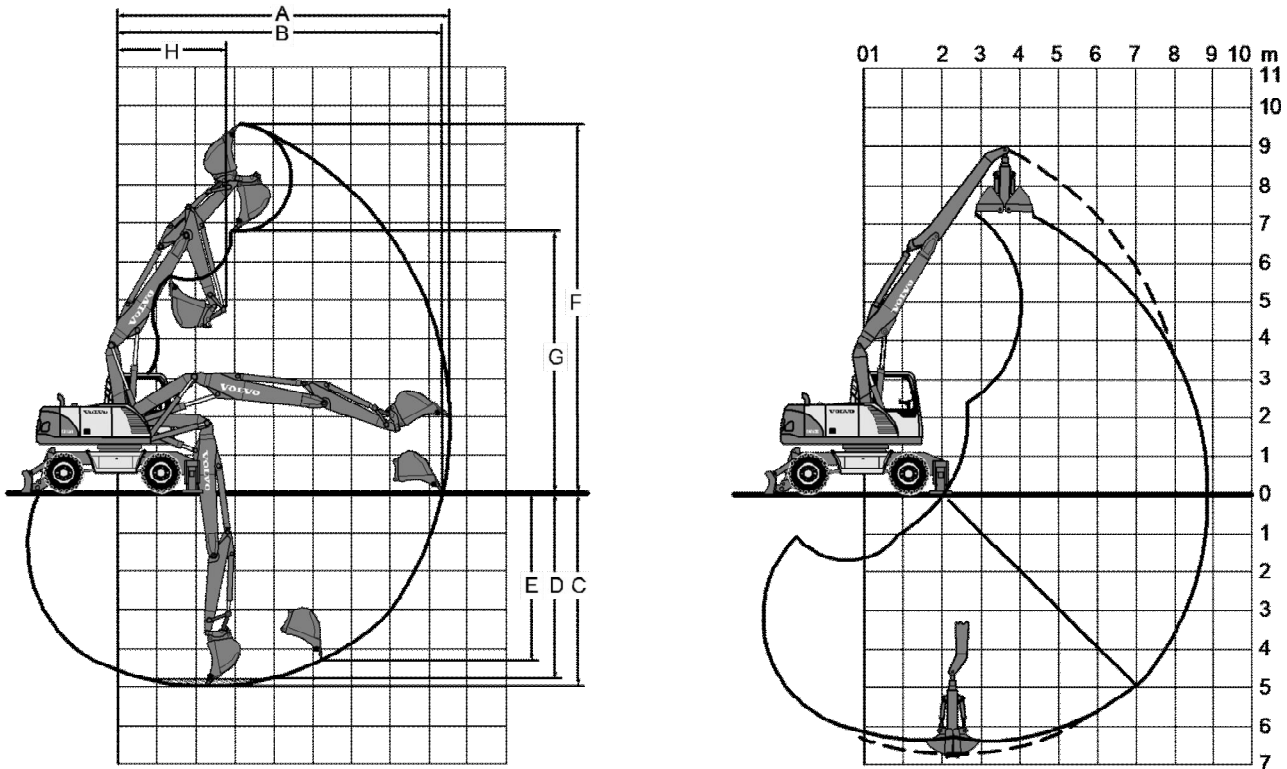

V1022402

Figure 2
Digging diagram, 2-piece boom
2-piece boom 5.1 m (16 ft 8.8 in)

Dipper arm	2.0 m (6 ft 6.8 in)	2.45 m (8 ft 0.5 in)	2.6 m (8 ft 6.4 in)	3.1 m (10 ft 2 in)	3.0 m [2] (9 ft 10.1 in)
A. Maximum digging reach	8.7 m (28 ft 6.5 in)	9.1 m (29 ft 10.3 in)	9.2 m (30 ft 2.2 in)	9.7 m (31 ft 10.9 in)	8.8 m (28 ft 10.5 in)
B. Maximum digging reach at ground level	8.4 m (27 ft 6.7 in)	8.9 m (29 ft 2.4 in)	9.0 m (29 ft 6.3 in)	9.5 m (31 ft 2.0 in)	8.8 m (28 ft 10.5 in)
C. Maximum digging depth	5.2 m (17 ft 0.7 in)	5.7 m (18 ft 8.4 in)	5.8 m (19 ft 0.3 in)	6.3 m (20 ft 8.0 in)	6.7 m (21 ft 11.8 in)
D. Maximum digging depth (2440 mm level)	4.9 m (16 ft 0.9 in)	5.3 m (17 ft 4.7 in)	5.5 m (18 ft 0.5 in)	6.0 m (19 ft 8.2 in)	-
E. Maximum vertical wall digging depth	4.3 m (14 ft 1.3 in)	4.8 m (15 ft 9.0 in)	4.9 m (16 ft 0.9 in)	5.4 m (17 ft 8.6 in)	6.7 m (21 ft 11.8 in)
F. Maximum cutting height	9.4 m (30 ft 10.1 in)	9.7 m (31 ft 10.9 in)	9.8 m (32 ft 1.8 in)	10.2 m (33 ft 5.6 in)	7.0 m (22 ft 11.6 in)
G. Maximum dumping height	6.8 m (22 ft 3.7 in)	7.2 m (23 ft 7.5 in)	7.3 m (23 ft 11.4 in)	7.7 m (25 ft 3.2 in)	6.5 m (21 ft 3.9 in)
H. Minimum front slew radius	2.6 m (8 ft 6.4 in)	2.8 m (9 ft 2.2 in)	2.8 m (9 ft 2.2 in)	2.9 m (9 ft 6.2 in)	3.3 m (10 ft 9.9 in)

in) | in) | in) | in) | in)

[1] Dipper arm for grab

[2] Dipper arm for grab

Document Title: Cylinder head specifications	Function Group: head, 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Cylinder head, specifications

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

Bolts for cylinder head

Quantity	26
Thread	M12
Length	19 bolts, 108 mm (4.25 in) 7 bolts, 178 mm (7 in)

Valve seat position

Diameter: inlet exhaust	42.7 +0.025 mm (1.68 +0.00098 in) 36.9 +0.025 mm (1.45 +0.00098 in)
Depth: inlet exhaust	10 + 1mm (0.39 +0.040 in) 10 + 1mm (0.39 +0.040 in)

Cylinder head gasket

Marking	Intended for piston height
1 hole	0.33-0.55 mm (0.0130-0.0220 in)
2 holes	0.56-0.65 mm (0.0220-0.0260 in)
3 holes	0.66-0.76 mm (0.0260-0.0300 in)

Document Title: Engine, capacities	Function Group: 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Servo pump, installing

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

Op nbr 9143-02

[14 360 000 Vacuum pump](#)

NOTE!

Removed clamps must be replaced. Oil that drains from hoses and connections must be collected in a container. Seals in disconnected or removed hoses or parts shall be replaced. Grease new seals before installing.

1. Transfer all pipe couplings and plugs to the new servo pump.

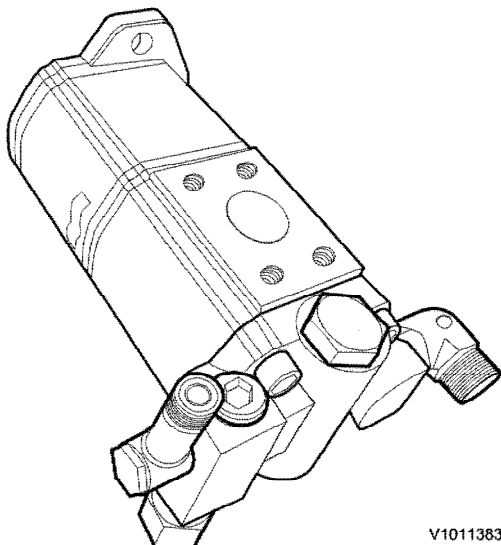


Figure 1

Transferring parts to new servo pump

2. Check that the drive sleeve is in place.
Fit the O-ring that seals between the engine block and servo pump.

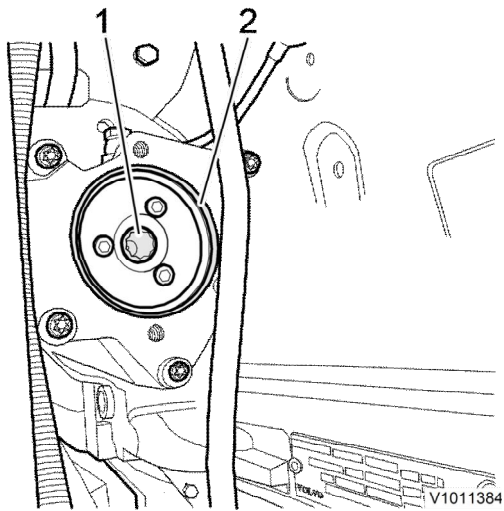


Figure 2

Connection for servo pump on engine block

1. Drive sleeve
2. O-ring

3. Fit the servo pump on the engine block with the bolts.

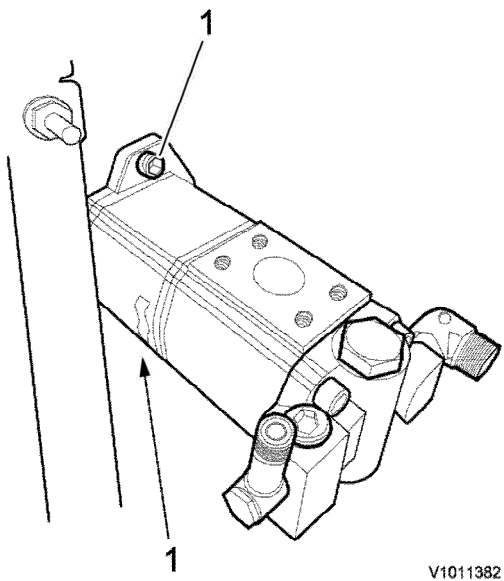


Figure 3

Installing servo pump

1. Bolts

4. Fit the pipe coupling.
Connect the hoses.
Fill the servo pump with hydraulic oil.
Connect the suction line.

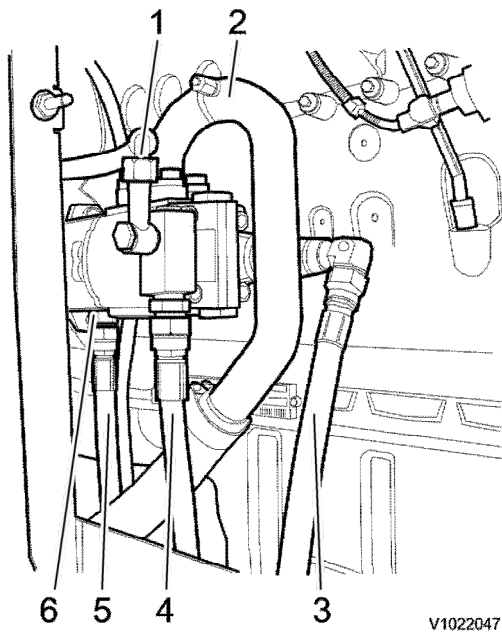


Figure 4

Servo pump on diesel engine

1. Servo pressure hose
 2. Suction line
 3. Pressure hose to fan motor (hydraulic oil cooler)
 4. Tank line
 5. Pressure hose to brake valve
 6. Pipe coupling
-
5. Disconnect the vacuum pump, see [Vacuum pump disconnection](#).
 6. Start the diesel engine, check for leaks, take action to fix any leaks.
 7. Check the servo / fan and brake / steering pressure, see [Hydraulic pressure adjusting](#).

Document Title: Cylinder specifications	Function Group: block, 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Cylinder block, specifications

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

Cylinder diameter (liner)	98 +0.02 mm (3.85 +0.0008 in)
Wear limit	98.1 mm (3.862 in)
Stroke	126 mm (4.96 in)
Sealing surface for liner, height	4.38 +0.03 mm (0.172 +0.0012 in)
Piston cooling nozzle	2-hole

Document Title: Cylinder specifications	liner, 030	Function Group:	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo				

Cylinder liner, specifications

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

Type	Wet, replaceable
Sealing surface against engine block, height	4.5 -0.02 mm (0.177 -0.0008 in)
Liner height above engine block	0.07-0.12 mm (0.0027-0.0047 in)

Document Title: Pistons, specifications	Function Group: 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Pistons, specifications

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

Number of ring grooves	3
Piston pin, diameter	38 -0.006 mm (1.5 -0.00024 in)
Pistons' max. height above engine block's surface	0.33-0.76 mm (0.0130-0.030 in)
Marking against flywheel side	Flywheel symbol

Combustion compartment	
Diameter	61 ±0.1 mm (2.40 ±0.004 in)
Depth	17.5 ±0.1 mm (0.69 ±0.004 in)



Document Title: Piston rings, specifications	Function Group: 030	Information Type: Service Information	Date: 3/24/2026
Profile: EW160B Volvo			

Piston rings, specifications

Showing Selected Profile

Valid for serial numbers			
Model	Production site	Serial number start	Serial number stop
EW160B Volvo			

Compression rings	
Quantity	2
Piston ring clearance in groove: Upper compression ring Lower compression ring	tapered 0.17 mm (0.0067 in)
Piston ring clearance in groove: Upper compression ring Lower compression ring	0.8 mm (0.032 in) 2.5 mm (0.098 in)

Oil scraper	
Quantity	1
Width, incl. spring	3 mm (0.118 in)
Piston ring clearance in groove	0.10 mm (0.004 in)
Piston ring gap in ring opening	1.15 mm (0.0453 in)