

Product: Case ISM Tier 4 ENGINE Service Manual

Full Download: <https://www.arepairmanual.com/downloads/case-ism-tier-4-engine-service-manual/>

ISM Tier 4 Engine

See the following page for engine model numbers

SERVICE MANUAL

Part number 47632293

2nd edition English

September 2014

Replaces part number 47434944

Sample of manual. Download All 567 pages at:

<https://www.arepairmanual.com/downloads/case-ism-tier-4-engine-service-manual/>



Product: Case ISM Tier 4 ENGINE Service Manual

Full Download: <https://www.arepairmanual.com/downloads/case-ism-tier-4-engine-service-manual/>



SERVICE MANUAL

**N4LDI-TA-45SL , N4LDI-TA-50SL , N843LT-F-27 , N843T-F-24 , N844L-F-30 ,
N844L-F-34 , N844L-F-36SL , N844LT-F-45SL**

Sample of manual. Download All 567 pages at:

<https://www.arepairmanual.com/downloads/case-ism-tier-4-engine-service-manual/>

Contents

INTRODUCTION

Engine.....	10
[10.001] Engine and crankcase	10.1
[10.102] Pan and covers	10.2
[10.106] Valve drive and gears	10.3
[10.101] Cylinder heads	10.4
[10.105] Connecting rods and pistons.....	10.5
[10.103] Crankshaft and flywheel.....	10.6
[10.110] Balancer and damper	10.7
[10.206] Fuel filters	10.8
[10.220] Throttle linkage.....	10.9
[10.218] Fuel injection system.....	10.10
[10.250] Turbocharger and lines.....	10.11
[10.254] Intake and exhaust manifolds and muffler	10.12
[10.500] Selective Catalytic Reduction (SCR) exhaust treatment	10.13
[10.501] Exhaust Gas Recirculation (EGR) - Diesel Particulate Filter (DPF) exhaust treatment	10.14
[10.400] Engine cooling system	10.15
[10.304] Engine lubrication system.....	10.16
[10.408] Oil cooler and lines.....	10.17
Electrical systems.....	55
[55.000] Electrical system	55.1
[55.015] Engine control system.....	55.2
[55.201] Engine starting system.....	55.3
[55.301] Alternator.....	55.4
[55.202] Cold start aid	55.5
[55.010] Fuel injection system.....	55.6

[55.014] Engine intake and exhaust system.....	55.7
[55.989] Exhaust Gas Recirculation (EGR) electrical system	55.8
[55.012] Engine cooling system	55.9
[55.013] Engine oil system	55.10
[55.640] Electronic modules	55.11



INTRODUCTION

Contents

INTRODUCTION

Foreword - Ecology and the environment	3
Safety rules	4
Basic instructions - Important notice regarding equipment servicing	5
Basic instructions - Shop and assembly	6
Torque - Minimum tightening torques for normal assembly	8

Foreword - Ecology and the environment

Soil, air, and water are vital factors of agriculture and life in general. When legislation does not yet rule the treatment of some of the substances required by advanced technology, sound judgment should govern the use and disposal of products of a chemical and petrochemical nature.

NOTE: *The following are recommendations that may be of assistance:*

- Become acquainted with and ensure that you understand the relative legislation applicable to your country.
- Where no legislation exists, obtain information from suppliers of oils, filters, batteries, fuels, antifreeze, cleaning agents, etc., with regard to their effect on man and nature and how to safely store, use, and dispose of these substances.
- Agricultural consultants will, in many cases, be able to help you as well.

Helpful hints

- Avoid filling tanks using cans or inappropriate pressurized fuel delivery systems that may cause considerable spillage.
- In general, avoid skin contact with all fuels, oils, acids, solvents, etc. Most of them contain substances that may be harmful to your health.
- Modern oils contain additives. Do not burn contaminated fuels and or waste oils in ordinary heating systems.
- Avoid spillage when draining off used engine coolant mixtures, engine, gearbox and hydraulic oils, brake fluids, etc. Do not mix drained brake fluids or fuels with lubricants. Store them safely until they can be disposed of in a proper way to comply with local legislation and available resources.
- Modern coolant mixtures, i.e. antifreeze and other additives, should be replaced every two years. They should not be allowed to get into the soil, but should be collected and disposed of properly.
- Do not open the air-conditioning system yourself. It contains gases that should not be released into the atmosphere. Your CNH dealer or air conditioning specialist has a special extractor for this purpose and will have to recharge the system properly.
- Repair any leaks or defects in the engine cooling or hydraulic system immediately.
- Do not increase the pressure in a pressurized circuit as this may lead to a component failure.
- Protect hoses during welding as penetrating weld splatter may burn a hole or weaken them, allowing the loss of oils, coolant, etc.

Safety rules

Personal safety



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible death or injury.

Throughout this manual and on machine decals, you will find the signal words DANGER, WARNING, and CAUTION followed by special instructions. These precautions are intended for the personal safety of you and those working with you.

Read and understand all the safety messages in this manual before you operate or service the machine.

 **DANGER** indicates a hazardous situation which, if not avoided, will result in death or serious injury. The color associated with DANGER is RED.

 **WARNING** indicates a hazardous situation which, if not avoided, could result in death or serious injury. The color associated with WARNING is ORANGE.

 **CAUTION**, used with the safety alert symbol, indicates a hazardous situation which, if not avoided, could result in minor or moderate injury. The color associated with CAUTION is YELLOW.

FAILURE TO FOLLOW DANGER, WARNING, AND CAUTION MESSAGES COULD RESULT IN DEATH OR SERIOUS INJURY.

Machine safety

NOTICE: Notice indicates a situation which, if not avoided, could result in machine or property damage. The color associated with Notice is BLUE.

Throughout this manual you will find the signal word Notice followed by special instructions to prevent machine or property damage. The word Notice is used to address practices not related to personal safety.

Information

NOTE: Note indicates additional information which clarifies steps, procedures, or other information in this manual.

Throughout this manual you will find the word Note followed by additional information about a step, procedure, or other information in the manual. The word Note is not intended to address personal safety or property damage.

Basic instructions - Important notice regarding equipment servicing

All repair and maintenance work listed in this manual must be carried out only by qualified dealership personnel, strictly complying with the instructions given, and using, whenever possible, the special tools.

Anyone who performs repair and maintenance operations without complying with the procedures provided herein shall be responsible for any subsequent damages.

The manufacturer and all the organizations of its distribution chain, including - without limitation - national, regional, or local dealers, reject any responsibility for damages caused by parts and/or components not approved by the manufacturer, including those used for the servicing or repair of the product manufactured or marketed by the manufacturer. In any case, no warranty is given or attributed on the product manufactured or marketed by the manufacturer in case of damages caused by parts and/or components not approved by the manufacturer.

The information in this manual is up-to-date at the date of the publication. It is the policy of the manufacturer for continuous improvement. Some information could not be updated due to modifications of a technical or commercial type, or changes to the laws and regulations of different countries.

In case of questions, refer to your CNH Sales and Service Networks.

Basic instructions - Shop and assembly

Shimming

For each adjustment operation, select adjusting shims and measure individually using a micrometer, then add up the recorded values. Do not rely on measuring the entire shimming set, which may be incorrect, or the rated value indicated on each shim.

Rotating shaft seals

For correct rotating shaft seal installation, proceed as follows:

- Before assembly, allow the seal to soak in the oil it will be sealing for at least thirty minutes.
- Thoroughly clean the shaft and check that the working surface on the shaft is not damaged.
- Position the sealing lip facing the fluid; with hydrodynamic lips, take into consideration the shaft rotation direction and position the grooves so that they will deviate the fluid towards the inner side of the seal.
- Coat the sealing lip with a thin layer of lubricant (use oil rather than grease) and fill the gap between the sealing lip and the dust lip on double lip seals with grease unless instructed otherwise.
- Insert the seal in its seat and press down using a flat punch or seal installation tool. Do not tap the seal with a hammer or mallet.
- While inserting the seal, check that it is perpendicular to the seat; once settled, make sure that it makes contact with the thrust element, if required.
- To prevent damaging the seal lip on the shaft, position a protective guard during installation operations.

O-ring seals

Lubricate the O-ring seals before inserting them in the seats, this will prevent them from overturning and twisting, which would jeopardize sealing efficiency.

Sealing compounds

Apply one of the following sealing compounds on the mating surfaces when specified: **SILMATE® RTV1473**, or **LOCTITE® RTV 598™** or **LOCTITE® INSTANT GASKET 587™ BLUE**. Before applying the sealing compound, prepare the surfaces as directed on product container or as follows:

- Remove any incrustations using a metal brush.
- Thoroughly de-grease the surfaces using a locally approved cleaning agent such as safety solvent or brake parts cleaner.

Spare parts

Only use "CNH Original Parts" or " CNH Parts".

Only genuine spare parts guarantee the same quality, duration and safety as original parts, as they are the same parts that are assembled during standard production. Only "CNH Original Parts" or " CNH Parts" can offer this guarantee.

When ordering spare parts, always provide the following information:

- Machine model (commercial name) and serial number
- Part number of the ordered part, which can be found in the "Service Parts Catalogue", used for order processing

Protecting the electrical/electronic systems during charging or welding

WARNING

Battery acid causes burns. Batteries contain sulfuric acid.

Avoid contact with skin, eyes or clothing. Antidote (external): Flush with water. Antidote (eyes): flush with water for 15 minutes and seek medical attention immediately. Antidote (internal): Drink large quantities of water or milk. Do not induce vomiting. Seek medical attention immediately.

Failure to comply could result in death or serious injury.

W0111A

To avoid damage to the electronic/electrical systems, always observe the following:

1. Never make or break any of the charging circuit connections, including the battery connections, when the engine is running.
2. Never short any of the charging components to ground.
3. Always disconnect the ground cable from the battery before arc welding on the machine or on any attachments on the machine.
 - Position the welder ground clamp as close to the welding area as possible
 - If welding in close proximity to a computer module, then the module should be removed from the machine
 - Never allow welding cables to lay on, near or across any electrical wiring or electronic component while welding is in progress
4. Always disconnect the negative cable from the battery when charging the battery in the machine with a battery charger.

NOTICE: *If welding must be performed on the unit, the battery ground cable must be disconnected from the machine battery. The electronic monitoring system and charging system will be damaged if this is not done.*

Remove the battery ground cable. Reconnect the cable when welding is completed.

Tools

The tools that CNH suggests and illustrated in this manual have been:

- Specifically researched and designed for use with CNH machines
- Essential for reliable repair operations
- Accurately built and rigorously tested so as to offer efficient and long-lasting operation

By using these tools, repair personnel will benefit from:

- Operating in optimal technical conditions
- Obtaining the best results
- Saving time and effort
- Working in safe conditions

NOTE: *The terms "front", "rear", "right-hand" and "left-hand" (when referred to different parts) are determined from the rear, facing in the direction of travel of the machine during operation.*

Torque - Minimum tightening torques for normal assembly

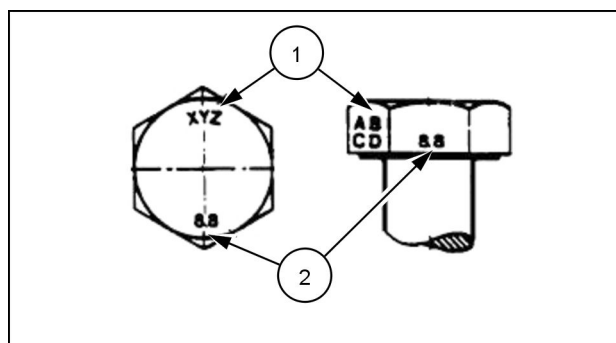
METRIC NON-FLANGED HARDWARE

NOM. SIZE	CLASS 8.8 BOLT and CLASS 8 NUT		CLASS 10.9 BOLT and CLASS 10 NUT		LOCKNUT CL.8 W/CL8.8 BOLT	LOCKNUT CL.10 W/CL10.9 BOLT
	UNPLATED	PLATED W/ZnCr	UNPLATED	PLATED W/ZnCr		
M4	2.2 N·m (19 lb in)	2.9 N·m (26 lb in)	3.2 N·m (28 lb in)	4.2 N·m (37 lb in)	2 N·m (18 lb in)	2.9 N·m (26 lb in)
M5	4.5 N·m (40 lb in)	5.9 N·m (52 lb in)	6.4 N·m (57 lb in)	8.5 N·m (75 lb in)	4 N·m (36 lb in)	5.8 N·m (51 lb in)
M6	7.5 N·m (66 lb in)	10 N·m (89 lb in)	11 N·m (96 lb in)	15 N·m (128 lb in)	6.8 N·m (60 lb in)	10 N·m (89 lb in)
M8	18 N·m (163 lb in)	25 N·m (217 lb in)	26 N·m (234 lb in)	35 N·m (311 lb in)	17 N·m (151 lb in)	24 N·m (212 lb in)
M10	37 N·m (27 lb ft)	49 N·m (36 lb ft)	52 N·m (38 lb ft)	70 N·m (51 lb ft)	33 N·m (25 lb ft)	48 N·m (35 lb ft)
M12	64 N·m (47 lb ft)	85 N·m (63 lb ft)	91 N·m (67 lb ft)	121 N·m (90 lb ft)	58 N·m (43 lb ft)	83 N·m (61 lb ft)
M16	158 N·m (116 lb ft)	210 N·m (155 lb ft)	225 N·m (166 lb ft)	301 N·m (222 lb ft)	143 N·m (106 lb ft)	205 N·m (151 lb ft)
M20	319 N·m (235 lb ft)	425 N·m (313 lb ft)	440 N·m (325 lb ft)	587 N·m (433 lb ft)	290 N·m (214 lb ft)	400 N·m (295 lb ft)
M24	551 N·m (410 lb ft)	735 N·m (500 lb ft)	762 N·m (560 lb ft)	1016 N·m (750 lb ft)	501 N·m (370 lb ft)	693 N·m (510 lb ft)

NOTE: M4 through M8 hardware torque specifications are shown in pound-inches. M10 through M24 hardware torque specifications are shown in pound-feet.

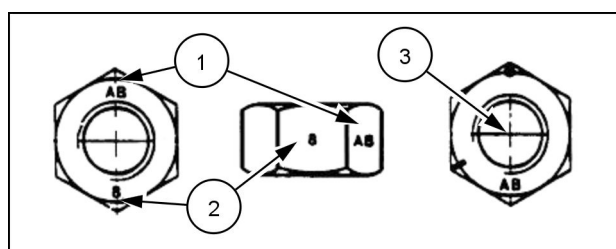
METRIC FLANGED HARDWARE

NOM. SIZE	CLASS 8.8 BOLT and CLASS 8 NUT		CLASS 10.9 BOLT and CLASS 10 NUT		LOCKNUT CL.8 W/CL8.8 BOLT	LOCKNUT CL.10 W/CL10.9 BOLT
	UNPLATED	PLATED W/ZnCr	UNPLATED	PLATED W/ZnCr		
M4	2.4 N·m (21 lb in)	3.2 N·m (28 lb in)	3.5 N·m (31 lb in)	4.6 N·m (41 lb in)	2.2 N·m (19 lb in)	3.1 N·m (27 lb in)
M5	4.9 N·m (43 lb in)	6.5 N·m (58 lb in)	7.0 N·m (62 lb in)	9.4 N·m (83 lb in)	4.4 N·m (39 lb in)	6.4 N·m (57 lb in)
M6	8.3 N·m (73 lb in)	11 N·m (96 lb in)	12 N·m (105 lb in)	16 N·m (141 lb in)	7.5 N·m (66 lb in)	11 N·m (96 lb in)
M8	20 N·m (179 lb in)	27 N·m (240 lb in)	29 N·m (257 lb in)	39 N·m (343 lb in)	18 N·m (163 lb in)	27 N·m (240 lb in)
M10	40 N·m (30 lb ft)	54 N·m (40 lb ft)	57 N·m (42 lb ft)	77 N·m (56 lb ft)	37 N·m (27 lb ft)	53 N·m (39 lb ft)
M12	70 N·m (52 lb ft)	93 N·m (69 lb ft)	100 N·m (74 lb ft)	134 N·m (98 lb ft)	63 N·m (47 lb ft)	91 N·m (67 lb ft)
M16	174 N·m (128 lb ft)	231 N·m (171 lb ft)	248 N·m (183 lb ft)	331 N·m (244 lb ft)	158 N·m (116 lb ft)	226 N·m (167 lb ft)
M20	350 N·m (259 lb ft)	467 N·m (345 lb ft)	484 N·m (357 lb ft)	645 N·m (476 lb ft)	318 N·m (235 lb ft)	440 N·m (325 lb ft)
M24	607 N·m (447 lb ft)	809 N·m (597 lb ft)	838 N·m (618 lb ft)	1118 N·m (824 lb ft)	552 N·m (407 lb ft)	

IDENTIFICATION**Metric Hex head and carriage bolts, classes 5.6 and up**

20083680 1

1. Manufacturer's Identification
2. Property Class

Metric Hex nuts and locknuts, classes 05 and up

20083681 2

1. Manufacturer's Identification
2. Property Class
3. Clock Marking of Property Class and Manufacturer's Identification (Optional), i.e. marks **60 °** apart indicate Class 10 properties, and marks **120 °** apart indicate Class 8.

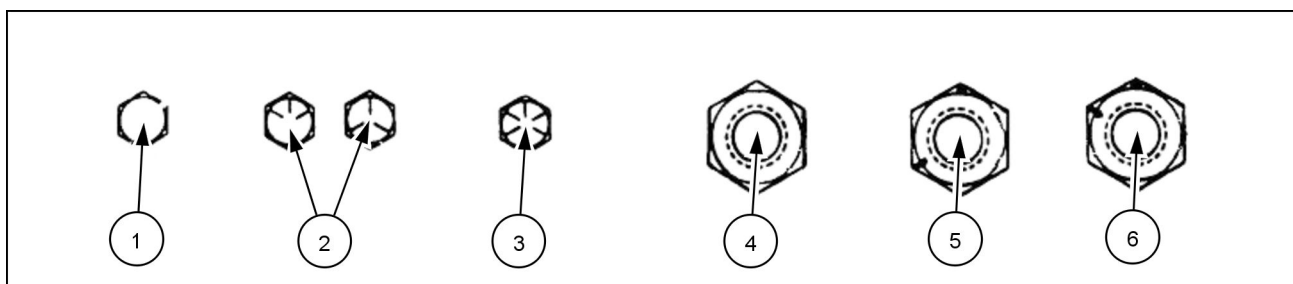
INCH NON-FLANGED HARDWARE

NOMINAL SIZE	SAE GRADE 5 BOLT and NUT		SAE GRADE 8 BOLT and NUT		LOCKNUT GrB W/ Gr5 BOLT	LOCKNUT GrC W/ Gr8 BOLT
	UN- PLATED or PLATED SILVER	PLATED W/ZnCr GOLD	UN- PLATED or PLATED SILVER	PLATED W/ZnCr GOLD		
1/4	8 N·m (71 lb in)	11 N·m (97 lb in)	12 N·m (106 lb in)	16 N·m (142 lb in)	8.5 N·m (75 lb in)	12.2 N·m (109 lb in)
5/16	17 N·m (150 lb in)	23 N·m (204 lb in)	24 N·m (212 lb in)	32 N·m (283 lb in)	17.5 N·m (155 lb in)	25 N·m (220 lb in)
3/8	30 N·m (22 lb ft)	40 N·m (30 lb ft)	43 N·m (31 lb ft)	57 N·m (42 lb ft)	31 N·m (23 lb ft)	44 N·m (33 lb ft)
7/16	48 N·m (36 lb ft)	65 N·m (48 lb ft)	68 N·m (50 lb ft)	91 N·m (67 lb ft)	50 N·m (37 lb ft)	71 N·m (53 lb ft)
1/2	74 N·m (54 lb ft)	98 N·m (73 lb ft)	104 N·m (77 lb ft)	139 N·m (103 lb ft)	76 N·m (56 lb ft)	108 N·m (80 lb ft)
9/16	107 N·m (79 lb ft)	142 N·m (105 lb ft)	150 N·m (111 lb ft)	201 N·m (148 lb ft)	111 N·m (82 lb ft)	156 N·m (115 lb ft)
5/8	147 N·m (108 lb ft)	196 N·m (145 lb ft)	208 N·m (153 lb ft)	277 N·m (204 lb ft)	153 N·m (113 lb ft)	215 N·m (159 lb ft)
3/4	261 N·m (193 lb ft)	348 N·m (257 lb ft)	369 N·m (272 lb ft)	491 N·m (362 lb ft)	271 N·m (200 lb ft)	383 N·m (282 lb ft)
7/8	420 N·m (310 lb ft)	561 N·m (413 lb ft)	594 N·m (438 lb ft)	791 N·m (584 lb ft)	437 N·m (323 lb ft)	617 N·m (455 lb ft)
1	630 N·m (465 lb ft)	841 N·m (620 lb ft)	890 N·m (656 lb ft)	1187 N·m (875 lb ft)	654 N·m (483 lb ft)	924 N·m (681 lb ft)

NOTE: For Imperial Units, **1/4 in** and **5/16 in** hardware torque specifications are shown in pound-inches. **3/8 in** through **1 in** hardware torque specifications are shown in pound-feet.

INCH FLANGED HARDWARE

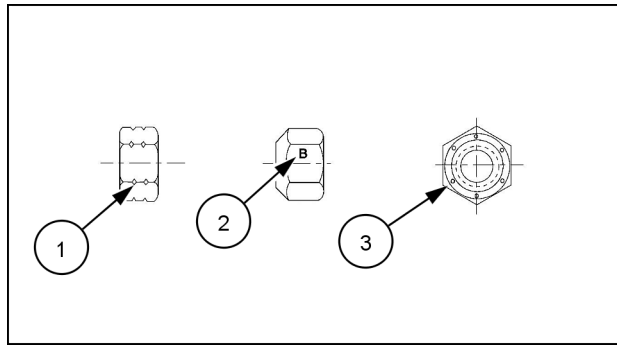
NOM- INAL SIZE	SAE GRADE 5 BOLT and NUT		SAE GRADE 8 BOLT and NUT		LOCKNUT GrF W/ Gr5 BOLT	LOCKNUT GrG W/ Gr8 BOLT
	UNPLATED or PLATED SILVER	PLATED W/ZnCr GOLD	UNPLATED or PLATED SILVER	PLATED W/ZnCr GOLD		
1/4	9 N·m (80 lb in)	12 N·m (106 lb in)	13 N·m (115 lb in)	17 N·m (150 lb in)	8 N·m (71 lb in)	12 N·m (106 lb in)
5/16	19 N·m (168 lb in)	25 N·m (221 lb in)	26 N·m (230 lb in)	35 N·m (310 lb in)	17 N·m (150 lb in)	24 N·m (212 lb in)
3/8	33 N·m (25 lb ft)	44 N·m (33 lb ft)	47 N·m (35 lb ft)	63 N·m (46 lb ft)	30 N·m (22 lb ft)	43 N·m (32 lb ft)
7/16	53 N·m (39 lb ft)	71 N·m (52 lb ft)	75 N·m (55 lb ft)	100 N·m (74 lb ft)	48 N·m (35 lb ft)	68 N·m (50 lb ft)
1/2	81 N·m (60 lb ft)	108 N·m (80 lb ft)	115 N·m (85 lb ft)	153 N·m (113 lb ft)	74 N·m (55 lb ft)	104 N·m (77 lb ft)
9/16	117 N·m (86 lb ft)	156 N·m (115 lb ft)	165 N·m (122 lb ft)	221 N·m (163 lb ft)	106 N·m (78 lb ft)	157 N·m (116 lb ft)
5/8	162 N·m (119 lb ft)	216 N·m (159 lb ft)	228 N·m (168 lb ft)	304 N·m (225 lb ft)	147 N·m (108 lb ft)	207 N·m (153 lb ft)
3/4	287 N·m (212 lb ft)	383 N·m (282 lb ft)	405 N·m (299 lb ft)	541 N·m (399 lb ft)	261 N·m (193 lb ft)	369 N·m (272 lb ft)
7/8	462 N·m (341 lb ft)	617 N·m (455 lb ft)	653 N·m (482 lb ft)	871 N·m (642 lb ft)	421 N·m (311 lb ft)	594 N·m (438 lb ft)
1	693 N·m (512 lb ft)	925 N·m (682 lb ft)	979 N·m (722 lb ft)	1305 N·m (963 lb ft)	631 N·m (465 lb ft)	890 N·m (656 lb ft)

IDENTIFICATION**Inch Bolts and free-spinning nuts**

20083682 3

Grade Marking Examples

SAE Grade Identification			
1	Grade 2 - No Marks	4	Grade 2 Nut - No Marks
2	Grade 5 - Three Marks	5	Grade 5 Nut - Marks 120 ° Apart
3	Grade 8 - Five Marks	6	Grade 8 Nut - Marks 60 ° Apart

Inch Lock Nuts, All Metal (Three optional methods)

20090268 4

Grade Identification

Grade	Corner Marking Method (1)	Flats Marking Method (2)	Clock Marking Method (3)
Grade A	No Notches	No Mark	No Marks
Grade B	One Circumferential Notch	Letter B	Three Marks
Grade C	Two Circumferential Notches	Letter C	Six Marks

CONSUMABLES INDEX

Consumable	Reference	PAGE
Loctite® RTV 598™	Basic instructions - Shop and assembly	6
Loctite® Instant Gasket 587™ Blue	Basic instructions - Shop and assembly	6



SERVICE MANUAL

Engine

**N4LDI-TA-45SL , N4LDI-TA-50SL , N843LT-F-27 , N843T-F-24 , N844L-F-30 ,
N844L-F-34 , N844L-F-36SL , N844LT-F-45SL**

Contents

Engine - 10

[10.001] Engine and crankcase	10.1
[10.102] Pan and covers	10.2
[10.106] Valve drive and gears	10.3
[10.101] Cylinder heads	10.4
[10.105] Connecting rods and pistons	10.5
[10.103] Crankshaft and flywheel.....	10.6
[10.110] Balancer and damper	10.7
[10.206] Fuel filters	10.8
[10.220] Throttle linkage.....	10.9
[10.218] Fuel injection system.....	10.10
[10.250] Turbocharger and lines.....	10.11
[10.254] Intake and exhaust manifolds and muffler	10.12
[10.500] Selective Catalytic Reduction (SCR) exhaust treatment.....	10.13
[10.501] Exhaust Gas Recirculation (EGR) - Diesel Particulate Filter (DPF) exhaust treatment	10.14
[10.400] Engine cooling system	10.15
[10.304] Engine lubrication system.....	10.16
[10.408] Oil cooler and lines.....	10.17

CONSUMABLES INDEX

Consumable	Reference	PAGE
Loctite® 5970™	Engine oil pan - Install	10.2 / 5
Molykote® G-N Metal assembly paste	Camshaft Tappets - Install	10.3 / 22
Molykote®	Cylinder head - Install	10.4 / 17
Loctite® 5970™	Flywheel housing - Install	10.6 / 11
Loctite® 5970™	Crankshaft oil seal Rear seal - Install	10.6 / 14



Engine - 10

Engine and crankcase - 001

**N4LDI-TA-45SL , N4LDI-TA-50SL , N843LT-F-27 , N843T-F-24 , N844L-F-30 ,
N844L-F-34 , N844L-F-36SL , N844LT-F-45SL**

Contents

Engine - 10

Engine and crankcase - 001

TECHNICAL DATA

Engine

Torque (*)	3
Torque (*)	3
General specification (*)	4
General specification (*)	4

Crankcase

Dimension	6
-----------	---

FUNCTIONAL DATA

Engine

Component identification (*)	7
Component identification (*)	8
Component identification (*)	9
Component identification (*)	10
Exploded view (*)	11
Exploded view (*)	12
Exploded view (*)	13
Exploded view (*)	14
Exploded view	15

SERVICE

Engine

Compression test (*)	16
Compression test (*)	17

Crankcase

Inspect	18
---------	----

DIAGNOSTIC

Engine

Troubleshooting (*)	19
---------------------	----

(*) See content for specific models

Engine - Torque

N4LDI-TA-45SL	
N4LDI-TA-50SL	

Parts name	Tightening torque	Remarks
Bearing holder (upper / lower)	49 - 54 N·m (36 - 40 lb ft)	
Bearing holder (Cylinder block / crankshaft)	49 - 54 N·m (36 - 40 lb ft)	Hexagon bolt
Bearing holder (Cylinder block / crankshaft)	25 - 29 N·m (18 - 21 lb ft)	Hexagon socket head bolt
Flywheel	73 - 78 N·m (54 - 58 lb ft)	
Connecting rod	49 - 54 N·m (36 - 40 lb ft)	
Crankshaft pulley	274 - 333 N·m (202 - 246 lb ft)	
Rocker arm assembly	27 - 39 N·m (20 - 29 lb ft)	
Head cover	12 - 16 N·m (9 - 12 lb ft)	
Drain ; oil sump	29 - 39 N·m (21 - 29 lb ft)	
Head bolt	Snug torque 48 - 52 N·m (35 - 38 lb ft) after that 120 - 180 °	Angle method
Injection pipe complete	20 - 25 N·m (14.8 - 18.4 lb ft)	Injector / Rail
Glow plug	15 - 20 N·m (11 - 15 lb ft)	
Relief valve assembly	59 - 69 N·m (44 - 51 lb ft)	
Oil pressure switch	14.7 - 19.6 N·m (10.8 - 14.5 lb ft)	
High Pressure (HP) pump	25 - 35 N·m (18.4 - 25.8 lb ft)	
Return pipe	12 - 14 N·m (9 - 10 lb ft)	
Rail	12 - 14 N·m (9 - 10 lb ft)	
Oil pipe complete	10 - 13 N·m (7.4 - 9.6 lb ft)	
Cam gear	68 - 72 N·m (50 - 53 lb ft)	
Pump gear	58 - 62 N·m (43 - 46 lb ft)	
Rocker arm adjust screw	12 - 16 N·m (9 - 12 lb ft)	
Sensor ; Water temperature	20 - 24 N·m (15 - 18 lb ft)	
Sensor ; Induction temperature	14.5 - 24.5 N·m (10.7 - 18.1 lb ft)	
Sensor ; Exhaust temperature	25 - 35 N·m (18.4 - 25.8 lb ft)	Apply an "Anti seize compound" to the threads of the sensor.

Engine - Torque

N843LT-F-27	
N843T-F-24	
N844L-F-30	
N844L-F-34	
N844L-F-36SL	
N844LT-F-45SL	

Parts name	Tightening torque	Remarks
Bearing holder (upper / lower)	49 - 54 N·m (36 - 40 lb ft)	
Bearing holder (Cylinder block / crankshaft)	49 - 54 N·m (36 - 40 lb ft)	Hexagon bolt
Bearing holder (Cylinder block / crankshaft)	25 - 29 N·m (18 - 21 lb ft)	Hexagon socket head bolt
Flywheel	73 - 78 N·m (54 - 58 lb ft)	
Connecting rod	49 - 54 N·m (36 - 40 lb ft)	
Crankshaft pulley	274 - 333 N·m (202 - 246 lb ft)	
Rocker arm assembly	27 - 39 N·m (20 - 29 lb ft)	
Head cover	12 - 16 N·m (9 - 12 lb ft)	
Drain ; oil sump	29 - 39 N·m (21 - 29 lb ft)	
Return nut (Nozzle and holder)	25 - 29 N·m (18 - 21 lb ft)	Tighten return pipe
Head bolt	Snug torque 48 - 52 N·m (35 - 38 lb ft) after that 120 - 180 °	Angle method

Parts name	Tightening torque	Remarks
Nozzle and holder	59 - 69 N·m (44 - 51 lb ft)	
Injection pipe complete	23 - 36 N·m (17 - 27 lb ft)	
Glow plug (engine and afterburner)	15 - 20 N·m (11 - 15 lb ft)	
Relief valve assembly	59 - 69 N·m (44 - 51 lb ft)	
Oil pressure switch	14.7 - 19.6 N·m (10.8 - 14.5 lb ft)	
Engine stop solenoid	14.7 - 24.5 N·m (10.8 - 18.1 lb ft)	
Sensor ; Water and induction temperature	14.7 - 19.6 N·m (10.8 - 14.5 lb ft)	
Sensor ; Speed	5.6 - 8.4 N·m (4.1 - 6.2 lb ft)	
Sensor ; Exhaust temperature	25 - 35 N·m (18.4 - 25.8 lb ft)	Apply an "Anti seize compound" to the threads of the sensor.

Engine - General specification

N4LDI-TA-45SL	
N4LDI-TA-50SL	

Engine model	N4LDI – TA – 50SL	N4LDI – TA – 45SL
Number of cylinders	4	
Combustion system	Direct Injection (DI)	
Bore x Stroke	84 mm x 100 mm (3.31 in x 3.94 in)	
Displacement	2216 cm ³ (135.2 in ³)	
Compression ratio	18:1	
Engine speeds (RPM)		
High idle	2825 RPM +/- 25 (No load)	
Rated	2800 RPM (Full load)	
Low idle	1200 RPM +/- 50	
Engine horsepower @ 2800 RPM	50 kW (68 Hp)	45 kW (61 Hp)
Peak torque @ 1800 RPM	208 N·m (153 lb ft)	183 N·m (135 lb ft)
Firing order	1-3-4-2	
Cylinder arrangement	In-Line Vertical	
Valve arrangement	Overhead	
Aspiration	Turbocharged with waste gate	
Emissions control	External Exhaust Gas Recirculation (EGR)	
Fuel injection system	Common rail system HP-CRS	
Lubrication method	Pressure feed by gerotor pump	
Oil capacity with filter included	7.1 L (7.5 US qt)	
Oil filtration	Replaceable full flow spin on cartridge	
Water pump style	Centrifugal	
Water pump flow @ rated RPM	55.5 L/min (14.7 US gpm)	
Coolant volume (engine only)	4.2 l (4.4 US qt)	
Engine dry weight	206 kg (454.2 lb)	
Air cleaner	Dry type	

Engine - General specification

N843LT-F-27	
N843T-F-24	
N844L-F-30	
N844L-F-34	
N844L-F-36SL	
N844LT-F-45SL	

Engine model	N844L – F – 36SL	N844LT – F – 45SL
Number of cylinders	4	
Combustion system	Swirl chamber	
Bore x Stroke	84 mm x 100 mm (3.31 in x 3.94 in)	

Engine - Engine and crankcase

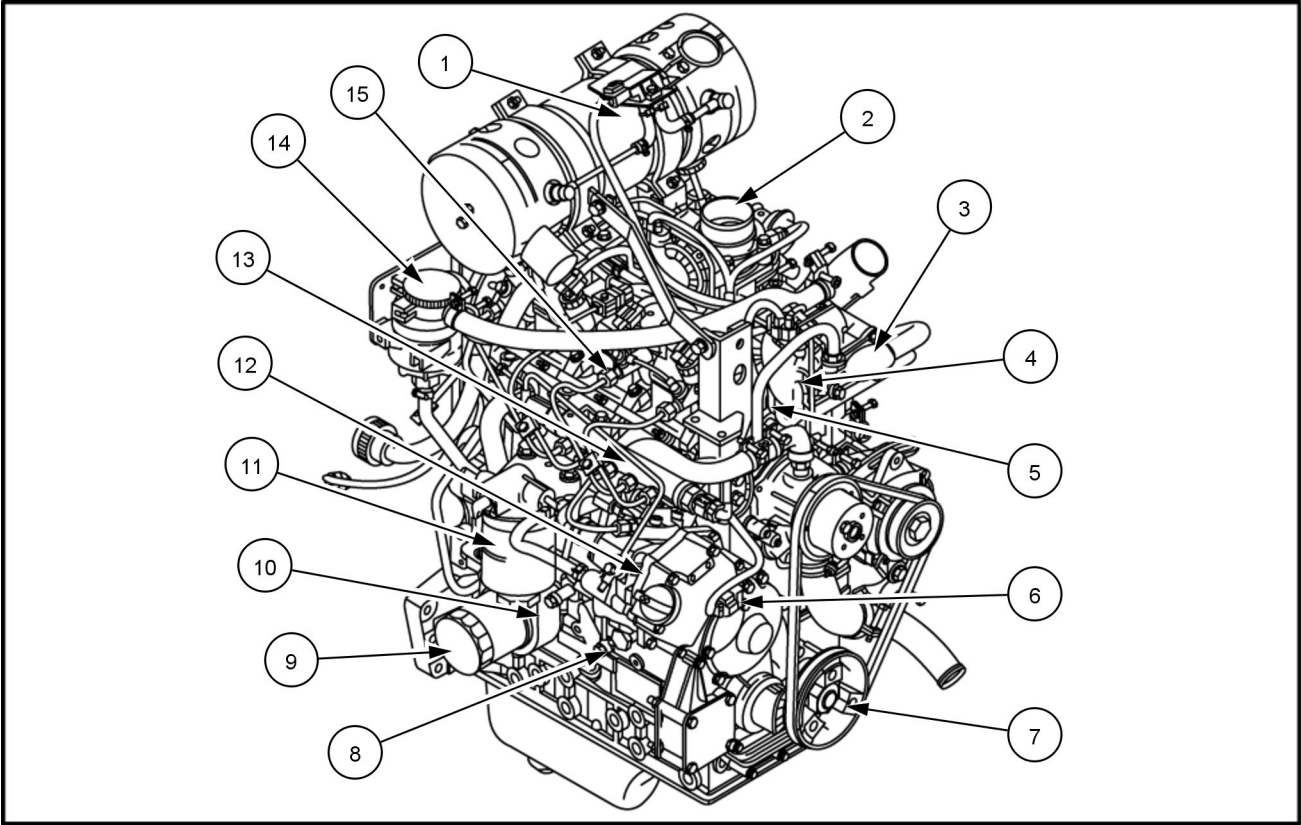
Engine model	N844L – F – 36SL	N844LT – F – 45SL
Displacement	2216 cm³ (135.2 in³)	
Compression ratio	22.5:1	
Engine horsepower @ 2800 RPM	36 kW (49 Hp)	44 kW (60 Hp)
Peak torque @ 1800 RPM	143 N·m (105 lb ft)	188 N·m (139 lb ft)
Engine speeds (RPM)		
High idle	2825 RPM +/- 25 (No load)	
Rated	2800 RPM (Full load)	
Low idle	1200 RPM +/- 50	
Firing Order	1-3-4-2	
Cylinder Arrangement	In-line vertical	
Valve Arrangement	Overhead	
Aspiration	Indirect naturally aspirated	Indirect turbocharged with waste gate
Emissions control	N/A	External Exhaust Gas Recirculation (EGR)
Injection pump	Bosch, In-line mechanical injection	
Injection nozzle	Throttle type	
Alternator output	12 V — 85 A	
Starter output	12 V — 2.0 kW	
Lubrication method	Pressure feed with gerotor pump	
Oil capacity with filter included	7.1 L (7.5 US qt)	
Oil filtration	Replaceable full flow spin on cartridge	
Water pump style	Centrifugal	
Water pump flow @ rated RPM	55.5 L/min (14.7 US gpm)	
Coolant volume (engine only)	2.8 l (3.0 US qt)	
Engine dry weight	227 kg (500 lb)	
Air cleaner	Dry type	

Crankcase - Dimension

Bore		
	Standard	84 - 84.019 mm (3.3071 - 3.3078 in)
Head surface warp		
	Standard	0.05 mm (0.002 in)
	Maximum	0.12 mm (0.005 in)

Engine - Component identification

N4LDI-TA-45SL	
N4LDI-TA-50SL	



NHIL13ENG0043AA 1

- (1) Diesel Oxidation Catalyst (DOC) Assembly

(2) Throttle valve assembly

(3) Exhaust Gas Recirculation (EGR) pipe

(4) Exhaust Gas Recirculation (EGR) valve

(5) Oil pressure switch
- (6) Timing sensor

(7) Crankshaft pulley

(8) Oil pressure relief valve

(9) Oil filter

(10) Oil cooler
- (11) Fuel filter

(12) High Pressure (HP) fuel pump

(13) Common rail assembly

(14) Blow-by recirculation filter

(15) Fuel injectors