

Product: Case NEF Tier 3 ENGINE Service Manual

Full Download: <https://www.arepairmanual.com/downloads/case-nef-tier-3-engine-service-manual/>

The logo features the word "CASE" in a large, bold, white sans-serif font. Below it, the word "CONSTRUCTION" is written in a smaller, white sans-serif font, centered within a yellow horizontal bar. The entire logo is set against a black background that has a trapezoidal shape, wider at the top and narrower at the bottom.

SERVICE MANUAL ENGINES NEF

**Tier 3
F4CE9484, F4CE9684,
F4DE9484, F4DE9684,
F4DE9687, F4GE9484,
F4GE9684, F4HE9484,
F4HE9684**

84250518

Sample of manual. Download All 474 pages at:
<https://www.arepairmanual.com/downloads/case-nef-tier-3-engine-service-manual/>

Issued 12-2009

Contents

INTRODUCTION

DISTRIBUTION SYSTEMS.....	A
ELECTRICAL POWER SYSTEM	A.30.A
POWER PRODUCTION	B
ENGINE	B.10.A
FUEL AND INJECTION SYSTEM.....	B.20.A
AIR INTAKE SYSTEM.....	B.30.A
EXHAUST SYSTEM.....	B.40.A
ENGINE COOLANT SYSTEM	B.50.A
LUBRICATION SYSTEM	B.60.A
STARTING SYSTEM	B.80.A



INTRODUCTION

Contents

INTRODUCTION

Foreword	3
Safety rules	4
Torque	6
F4DE9484, F4HE9484, F4DE9684, F4DE9687, F4HE9684	
Torque	9
F4CE9484, F4GE9484, F4CE9684, F4GE9684	
Special tools	11
F4DE9484, F4HE9484, F4DE9684, F4DE9687, F4HE9684	
Special tools	18
F4CE9484, F4GE9484, F4CE9684, F4GE9684	

Foreword

Engine Overhaul

Part of the operations illustrated within this manual can be partially executed while the engine is assembled on the vehicle, depending on the room available for access to the engine and on the equipment application as well.

NOTE: *With regard to the engine disassembly operations, please apply for information consulting the specific manual.*

The following information relates to the engine overhaul operations only for what concerns the different components customizing the engine, according to its specific duties.

In section "General Overhaul", all the operations of engine block overhaul have been contemplated. Therefore the above mentioned section is to be considered as following the part hereby described.

Safety rules

Standard safety prescriptions

Particular attention shall be drawn on some precautions that must be followed absolutely in a standard working area and whose non fulfillment will make any other measure useless or not sufficient to ensure safety to the personnel in charge of maintenance.

Be informed and inform personnel as well of the laws in force regulating safety, providing information documentation available for consultation.

- Keep working areas as clean as possible, ensuring adequate aeration.
- Ensure that working areas are provided with emergency boxes, that must be clearly visible and always provided with adequate sanitary equipment.
- Provide for adequate fire extinguishing means, properly indicated and always having free access. Their efficiency must be checked on a regular basis and the personnel must be trained on intervention methods and priorities.
- Organize and identify specific exit points to evacuate the areas in case of an emergency, providing for adequate indications of the emergency indications of the emergency exit lines.
- Smoking in working areas subject to fire danger must be strictly prohibited.
- Provide warnings throughout adequate boards signaling danger, prohibitions and indications to ensure easy comprehension of the instructions even in case of an emergency.

Prevention of injury

- Do not wear unsuitable clothes for work, with fluttering ends, nor jewels such as and chains when working close to engines and equipment in motion.
- Wear safety gloves and goggles when performing the following operations:
 - filling inhibitors or anti-frost
 - lubrication oil topping or replacement
 - utilization of compressed air or liquids under pressure (pressure allowed < **2 bar (29 psi)**).
- Wear safety helmet when working close to hanging loads or equipment working at head height level.
- Always wear safety shoes and clothes adhering to the body, better if provided with elastics at the ends.
- Use protection cream for hands.
- Change wet clothes as soon as possible.
- In presence of electrical current exceeding **48 - 60 V** verify efficiency of earth and mass electrical connections. Ensure that hands and feet are dry and execute working operations utilizing isolating foot boards. Do not carry out working operations if not trained for.
- Do not smoke nor light up flames close to batteries and to any fuel material.
- Put the dirty rags with oil, diesel fuel or solvents in anti-fire specially provided containers.
- Do not execute any intervention if not provided with necessary instructions.
- Do not use any tool or equipment for any different operation from the ones they've been designed and provided for. Serious injury may occur.
- In case of test or calibration operations requiring engine running, ensure that the area is sufficiently ventilated or utilize specific vacuum equipment to eliminate exhaust gas. Danger: poisoning or death.

During maintenance

- Never open filler cap of cooling system when the engine is hot. Operating pressure would provoke high temperature with serious danger and risk of burn. Wait until the temperature decreases under **50 °C (122 °F)**.
- Never top up an overheated engine with cooler and utilize only appropriate liquids.
- Always operate when the engine is tuned off; when particular circumstances require maintenance intervention on running engine, be aware of all risks involved with such operation.
- Be equipped with adequate and safe containers for drainage operation of engine liquids and exhaust oil.

- Keep the engine clean from oil spills, diesel fuel and or chemical solvents.
- Use of solvents or detergents during maintenance may originate toxic vapors. Always keep working areas ventilated. Whenever necessary wear safety mask.
- Do not leave rags impregnated with flammable substances close to the engine.
- Upon engine start after maintenance, undertake proper preventing actions to stop air suction in case of a runaway speed rate.
- Do not utilize fast screw tightening tools.
- Never disconnect batteries when the engine is running.
- Disconnect batteries before any intervention on the electrical system.
- Disconnect batteries from system before applying a load to them with the battery loader.
- After every intervention, verify that battery clamp polarity is correct and that the clamps are tight and safe from accidental short circuit and oxidation.
- Do not disconnect and connect electrical connections in presence of electrical feed.
- Before proceeding with pipelines disassembly (pneumatic, hydraulic, fuel pipes) verify presence of liquid or air under pressure. Take all necessary precautions bleeding and draining residual pressure or closing dump valves. Always wear adequate safety mask or goggles. Non fulfillment of these precautions may cause serious injury and poisoning.
- Avoid incorrect tightening or out of sequence. Danger: incorrect tightening may seriously damage engine's components, affecting engine's duration.
- Avoid priming from fuel tanks made out of copper alloys and/or with ducts not being provided with filters.
- Do not modify cable wires: their lengths shall not be changed.
- Do not connect to the engine electrical equipment unless specifically approved by Iveco.
- Do not modify fuel systems or hydraulic system unless Iveco specific approval has been released. Any unauthorized modification will compromise warranty assistance and furthermore may affect engine correct working and duration.

For engines equipped with electronic controller:

- Do not execute electric arc welding without having previously removed electronic controller.
- Remove electronic controller in case of any intervention requiring heating over **80 °C (176 °F)** temperature.
- Do not paint the components and the electronic connections.
- Do not vary or alter any data filed in the electronic controller driving the engine. Any manipulation or alteration of electronic components shall totally compromise engine assistance warranty and furthermore may affect engine correct working and duration.

Respect of the Environment

- Respect of the Environment shall be of primary importance: all necessary precautions to ensure personnel's safety and health shall be adopted.
- Be informed and inform personnel as well of the laws in force regulating use and exhaust of liquids and engine drain oil. Provide for adequate board indications and organic specific training courses to ensure that personnel is fully aware of such law prescriptions and of basic preventative safety measures.
- Collect drain oils in adequate specially provided containers with hermetic sealing ensuring that storage is made in specific, properly identified areas that shall be ventilated far from heat sources and not exposed to fire danger,
- Handle the batteries with care, storing them in ventilated environment and within anti-acid containers. Warning: Battery exhalation represent serious danger of intoxication and environment contamination.

Torque

F4DE9484, F4HE9484, F4DE9684, F4DE9687, F4HE9684

Component	Size	Specification
Cylinder Head and Components		
Plug	1/4"	10 - 14 Nm (7.4 - 10.3 lb ft)
	1/2"	20 - 28 Nm (14.8 - 20.7 lb ft)
	3/4"	31 - 41 Nm (22.9 - 30.2 lb ft)
Grid Heater	M6 Nut	6 - 10 Nm (4.4 - 7.4 lb ft)
Intake Manifold	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
Engine Lifting Bracket		
Rear	M12	65 - 89 Nm (47.9 - 65.6 lb ft)
Front	M8	20 - 28 Nm (14.8 - 20.7 lb ft)
Cylinder Head	M12x1.75x130 mm	
First Phase		30 - 40 Nm (22.1 - 29.5 lb ft)
Second Phase		85 - 95 °
Third Phase		85 - 95 °
Cylinder Head	M12x1.75x150 mm	
First Phase		50 - 60 Nm (36.9 - 44.3 lb ft)
Second Phase		85 - 95 °
Third Phase		85 - 95 °
Rocker Bracket		31 - 41 Nm (22.9 - 30.2 lb ft)
Rocker Arm Jam Nuts		20 - 28 Nm (14.8 - 20.7 lb ft)
Exhaust Manifold		48 - 58 Nm (35.4 - 42.8 lb ft)
Valve Cover	M8 Nut	20 - 28 Nm (14.8 - 20.7 lb ft)
Turbocharger		
6 Cylinder	M8 Screw	6 - 8 Nm (4.4 - 5.9 lb ft)
	M8 Nut	37 - 49 Nm (27.3 - 36.1 lb ft)
4 Cylinder	M8 Screw	6 - 8 Nm (4.4 - 5.9 lb ft)
	M8 Nut	20 - 28 Nm (14.8 - 20.7 lb ft)
Front Case		
Front Cover	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
Rear Case		
Gear Case	M12 Screw	65 - 89 Nm (47.9 - 65.6 lb ft)
	M10 Screw	42 - 52 Nm (31.0 - 38.4 lb ft)
	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
Flywheel Housing	M10	75 - 95 Nm (55.3 - 70.1 lb ft)
	M12	44 - 54 Nm (32.5 - 39.8 lb ft)
Cylinder Block and Crankshaft Components		

INTRODUCTION

Component	Size	Specification
Camshaft Retaining Plate	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
Camshaft Gear	M8 Screw	32 - 40 Nm (23.6 - 29.5 lb ft)
Crankcase Plate	M10 Screw	38 - 48 Nm (28.0 - 35.4 lb ft)
Vibration Damper and Adapter	M12	
First Phase		45 - 55 Nm (33.2 - 40.6 lb ft)
Second Phase		90 °
Drive Pulley	M10	61 - 75 Nm (45.0 - 55.3 lb ft)
Engine Flywheel	M12	
First Phase		26 - 34 Nm (19.2 - 25.1 lb ft)
Second Phase		55 - 65 °
Main Caps	M12	
First Phase		44 - 56 Nm (32.5 - 41.3 lb ft)
Second Phase		74 - 86 Nm (54.6 - 63.4 lb ft)
Third Phase		85 - 95 °
Connecting Rod Caps		
First Phase		55 - 65 Nm (40.6 - 47.9 lb ft)
Second Phase		55 - 65 °
Lubrication System and Components		
Oil Pump		
First Phase	M8	7 - 9 Nm (5.2 - 6.6 lb ft)
Second Phase	M8	20 - 28 Nm (14.8 - 20.7 lb ft)
Oil Pressure Relief Valve	M22	72 - 88 Nm (53.1 - 64.9 lb ft)
Oil Cooler and Oil Filter Base	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
Oil Filter		Contact + ¾ Turn
Connection on Filter Base for Turbo Oil Supply	1 ⅛"	20 - 28 Nm (14.8 - 20.7 lb ft)
Turbo Lubrication Pipe	M12 Nut	8 - 12 Nm (5.9 - 8.9 lb ft)
Turbo Lubrication Pipe Adapter	M12	30 - 40 Nm (22.1 - 29.5 lb ft)
Oil Pan		20 - 28 Nm (14.8 - 20.7 lb ft)
Piston Spray Nozzles	M8	12 - 18 Nm (8.9 - 13.3 lb ft)
Electrical Components		
Camshaft Sensor	M6 Studs	6 - 10 Nm (4.4 - 7.4 lb ft)
	M6 Nut	8 - 12 Nm (5.9 - 8.9 lb ft)
	M6 Screw	6 - 10 Nm (4.4 - 7.4 lb ft)
Wiring Bulkhead	M6 Screw	8 - 12 Nm (5.9 - 8.9 lb ft)
Support Bracket for Injector Wiring	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
Injector Wiring		1.25 - 1.75 Nm (0.92 - 1.29 lb ft)
ECU Cooling Plate	M6 Screw	8 - 12 Nm (5.9 - 8.9 lb ft)
	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
Fuel Outlet	M12	10 - 14 Nm (7.4 - 10.3 lb ft)
Fuel Inlet	M12	10 - 14 Nm (7.4 - 10.3 lb ft)
Crankshaft Speed Sensor	M6 Screw	6 - 10 Nm (4.4 - 7.4 lb ft)
Coolant Temperature Sensor	M14 Screw	17 - 23 Nm (12.5 - 17.0 lb ft)
Oil Pressure / Temperature Sensor	M5 Screw	5 - 7 Nm (3.7 - 5.2 lb ft)
Fuel Pressure Sensor		30 - 40 Nm (22.1 - 29.5 lb ft)
Fuel Temperature Sensor	M14	17 - 23 Nm (12.5 - 17.0 lb ft)
Air Pressure / Temperature Sensor		5 - 7 Nm (3.7 - 5.2 lb ft)
Engine Oil Level Sensor	M12	10 - 14 Nm (7.4 - 10.3 lb ft)
Alternator Support Bracket	M10 Screw	37 - 49 Nm (27.3 - 36.1 lb ft)
Alternator Tension Bracket	M10 Screw	37 - 49 Nm (27.3 - 36.1 lb ft)
Starter		37 - 49 Nm (27.3 - 36.1 lb ft)

INTRODUCTION

Component	Size	Specification
Fuel System and Components		
Feed Pump	M8 Studs	10 - 14 Nm (7.4 - 10.3 lb ft)
High Pressure Pump Gear	M18 Nut	100 - 110 Nm (73.8 - 81.1 lb ft)
Fuel Pump	M8 Nut	20 - 28 Nm (14.8 - 20.7 lb ft)
Injector		
First Phase	M6 Screw	8.15 - 8.85 Nm (6.0 - 6.5 lb ft)
Second Phase	M6 Screw	70 - 80 °
Injector Feed Connector		45 - 55 Nm (33.2 - 40.6 lb ft)
Common Rail	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
High Pressure Fuel Line	M14 Fitting	18 - 22 Nm (13.3 - 16.2 lb ft)
High Pressure Pipe Connector	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
Fuel Filter Bracket	M12 Screw	71 - 85 Nm (52.4 - 62.7 lb ft)
Fuel Filter Holder	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
Fuel Filter		Contact + ¼ Turn
Cooling System and Components		
Engine Coolant Inlet	M10 Screw	37 - 49 Nm (27.3 - 36.1 lb ft)
Fitting on Coolant Inlet	90 ° Elbow	20 - 28 Nm (14.8 - 20.7 lb ft)
Compressor Cooling Pipe		20 - 24 Nm (14.8 - 17.7 lb ft)
Engine Coolant Drain Collector	M6 Screw	8 - 12 Nm (5.9 - 8.9 lb ft)
Water Pump	M8 Screw	20 - 28 Nm (14.8 - 20.7 lb ft)
Belt Tensioner	M10	37 - 49 Nm (27.3 - 36.1 lb ft)
Idler Pulleys	M10	37 - 49 Nm (27.3 - 36.1 lb ft)

Torque

F4CE9484, F4GE9484, F4CE9684, F4GE9684

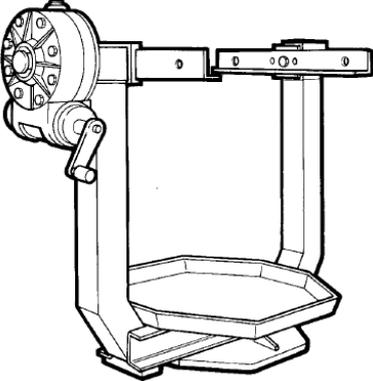
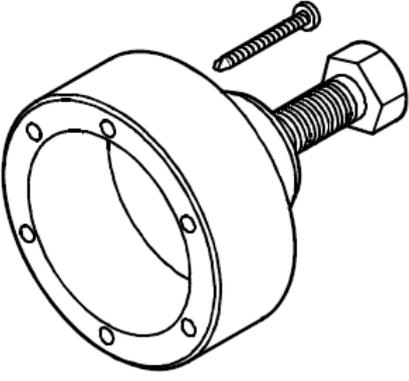
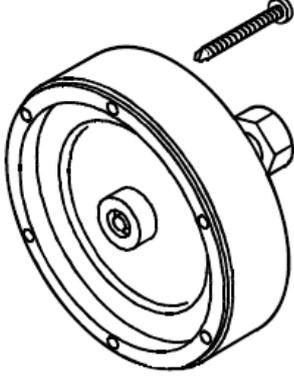
Component	Size	Specification
Cylinder Head and Components		
Rocker Assembly	M8	20 - 28 Nm (14.8 - 20.7 lb ft)
Cylinder Head	M12x70	
Phase 1		50 Nm (36.9 lb ft)
Phase 2		90 °
Cylinder Head	M12x140	
Phase 1		40 Nm (29.5 lb ft)
Phase 2		180 °
Cylinder Head	M12x180	
Phase 1		70 Nm (51.6 lb ft)
Phase 2		180 °
Valve Cover	M8x1.25x25	20 - 28 Nm (14.8 - 20.7 lb ft)
Intake manifold	M8x1.25	20 - 28 Nm (14.8 - 20.7 lb ft)
Air intake elbow	M8x1.25	20 - 28 Nm (14.8 - 20.7 lb ft)
Exhaust manifold	M10x1.5x65	37 - 49 Nm (27.3 - 36.1 lb ft)
Rear lifting bracket	M12x1.75x30	65 - 89 Nm (47.9 - 65.6 lb ft)
Turbocharger	M10	37 - 49 Nm (27.3 - 36.1 lb ft)
Front Case		
Front cover assembly	M8x1.25x45	20 - 28 Nm (14.8 - 20.7 lb ft)
	M8x1.25x30	20 - 28 Nm (14.8 - 20.7 lb ft)
Rear Case		
Gear Case	M8x1.25x40	20 - 28 Nm (14.8 - 20.7 lb ft)
	M8x1.25x25	20 - 28 Nm (14.8 - 20.7 lb ft)
	M10x1.5	44 - 54 Nm (32.5 - 39.8 lb ft)
Flywheel housing	M12x120	75 - 95 Nm (55.3 - 70.1 lb ft)
	M12x80	75 - 95 Nm (55.3 - 70.1 lb ft)
	M10x80	44 - 54 Nm (32.5 - 39.8 lb ft)
	M10x40	44 - 54 Nm (32.5 - 39.8 lb ft)
Phase 1	M12x1.25	26 - 34 Nm (19.2 - 25.1 lb ft)
Phase 2	M12x1.25	55 - 65 °
Cylinder Block and Crankshaft Components		
Main bearing cap		
Phase 1		44 - 56 Nm (32.5 - 41.3 lb ft)
Phase 2		74 - 86 Nm (54.6 - 63.4 lb ft)
Phase 3		85 - 95 °
Connecting rod	M11x1.25	
Phase 1		27 - 33 Nm (19.9 - 24.3 lb ft)
Phase 2		55 - 65 Nm (40.6 - 47.9 lb ft)
Phase 3		55 - 65 °
Timing Pin		4 - 6 Nm (3.0 - 4.4 lb ft)
Crankshaft pulley	M12x1.75	105 - 115 Nm (77.4 - 84.8 lb ft)
Camshaft retaining plate	M8	20 - 28 Nm (14.8 - 20.7 lb ft)
Camshaft gear	M8	32 - 40 Nm (23.6 - 29.5 lb ft)
Lubrication System and Components		

INTRODUCTION

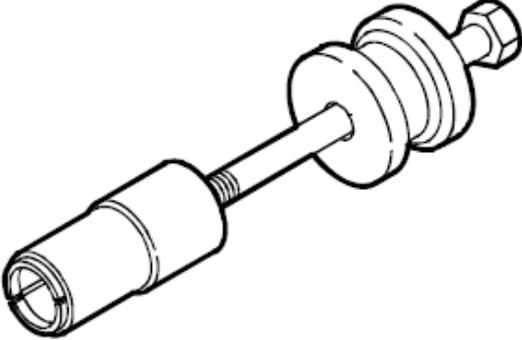
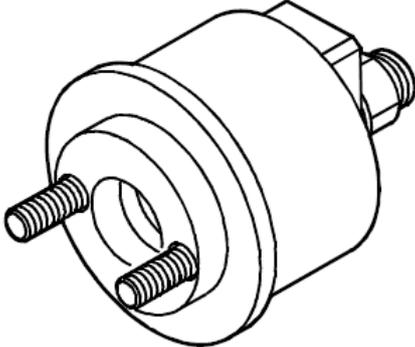
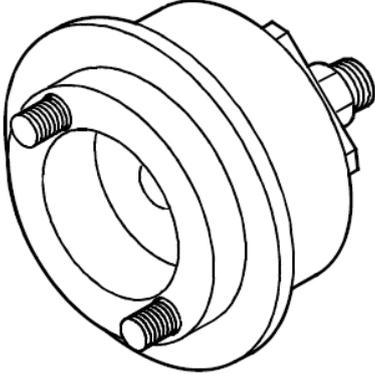
Component	Size	Specification
Piston Cooling Nozzles	M8x1.25x10	12 - 18 Nm (8.9 - 13.3 lb ft)
Oil pump	M8x1.25x30	7 - 9 Nm (5.2 - 6.6 lb ft)
Stiffening Plate	M10x1.25x25	38 - 48 Nm (28.0 - 35.4 lb ft)
Oil plug	M10x1	5 - 7 Nm (3.7 - 5.2 lb ft)
	M14x1.5	9 - 13 Nm (6.6 - 9.6 lb ft)
Oil Pick up tube	M8x1.25x20	20 - 28 Nm (14.8 - 20.7 lb ft)
Oil Pan	M8x1.25x25	20 - 28 Nm (14.8 - 20.7 lb ft)
	M18x1.50	51 - 69 Nm (37.6 - 50.9 lb ft)
Oil Bypass Valve	M22x1.5x10	72 - 88 Nm (53.1 - 64.9 lb ft)
Turbo Lubrication Lines		
Turbo end	M12x1.5	20 - 28 Nm (14.8 - 20.7 lb ft)
Filter base end		20 - 28 Nm (14.8 - 20.7 lb ft)
Drain	M8x1.25x16	20 - 28 Nm (14.8 - 20.7 lb ft)
Electrical Components		
Alternator		
	M8x1.25x30	20 - 28 Nm (14.8 - 20.7 lb ft)
	M10x1.25x25	20 - 28 Nm (14.8 - 20.7 lb ft)
	M10	44 - 54 Nm (32.5 - 39.8 lb ft)
	M12x1.75x120	37 - 49 Nm (27.3 - 36.1 lb ft)
Alternator wiring	M6x1.0 nut	8 - 11 Nm (5.9 - 8.1 lb ft)
Starter	M10	54 - 44 Nm (39.8 - 32.5 lb ft)
Fuel System and Components		
Fuel pump	M8 screw	20 - 28 Nm (14.8 - 20.7 lb ft)
	M6 screw	9 - 11 Nm (6.6 - 8.1 lb ft)
	M6 nut	9 - 11 Nm (6.6 - 8.1 lb ft)
Fuel Pump Drive Gear		
Phase 1		15 - 20 Nm (11.1 - 14.8 lb ft)
Phase 2		85 - 90 Nm (62.7 - 66.4 lb ft)
Timing Pin Cap		30 - 35 Nm (22.1 - 25.8 lb ft)
Fuel injectors		55 - 65 Nm (40.6 - 47.9 lb ft)
Fuel lift pump		20 - 28 Nm (14.8 - 20.7 lb ft)
Cooling System and Components		
Water Pump	M8x1.25x25	20 - 28 Nm (14.8 - 20.7 lb ft)
Water outlet connection	M8x1.25x35	20 - 28 Nm (14.8 - 20.7 lb ft)
	M8x1.25x70	20 - 28 Nm (14.8 - 20.7 lb ft)
Fan support	M10x1.5x20	28 - 38 Nm (20.7 - 28.0 lb ft)
Fan pulley	M6	8 - 12 Nm (5.9 - 8.9 lb ft)
	M10	27 - 49 Nm (19.9 - 36.1 lb ft)

Special tools

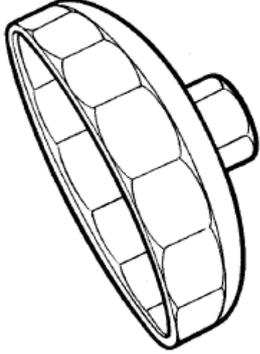
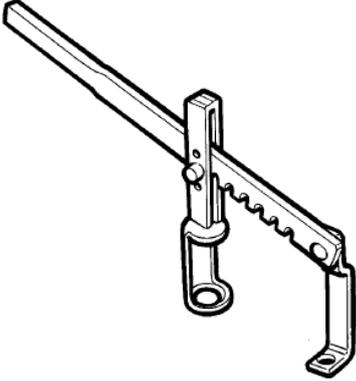
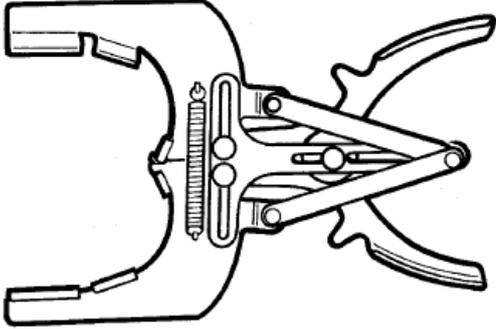
F4DE9484, F4HE9484, F4DE9684, F4DE9687, F4HE9684

Tool No.	Description	Image
38000301	Revolving engine stand	 <p>REVOLVING STAND 1</p>
38000665	Crankshaft front seal puller	 <p>FRONTSEALPULLER 2</p>
38000663	Crankshaft rear seal puller	 <p>REARSEALPULLER 3</p>

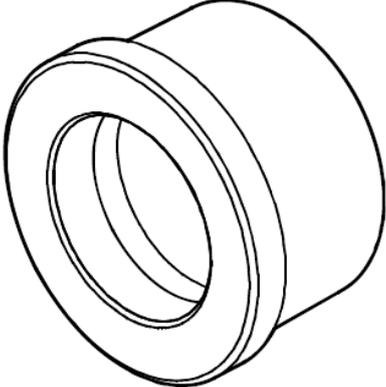
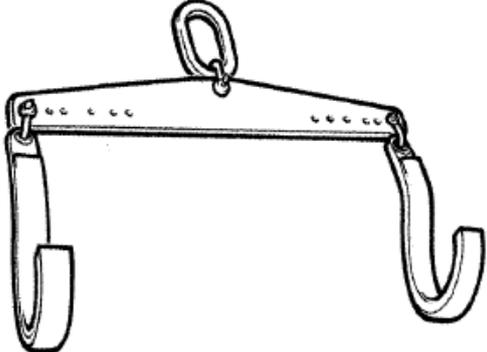
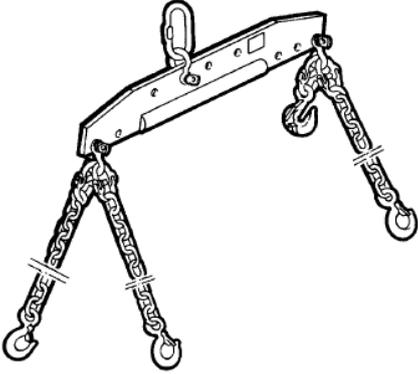
INTRODUCTION

Tool No.	Description	Image
380001099	Injector puller	 <p data-bbox="1007 667 1166 685">INJECTORPULLER 4</p>
380000666	Crankshaft front seal installer	 <p data-bbox="1007 1128 1166 1146">FRONTSEALINSTAL 5</p>
380000664	Crankshaft rear seal installer	 <p data-bbox="1007 1592 1166 1610">CRANKREARSEALIN 6</p>

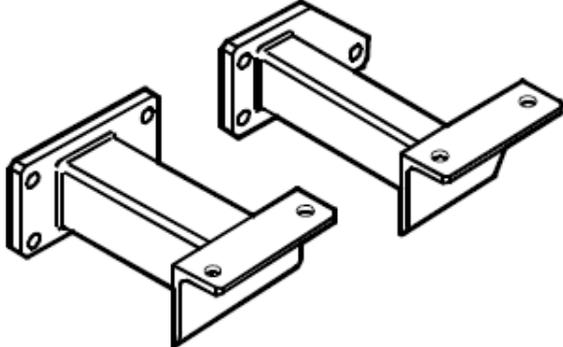
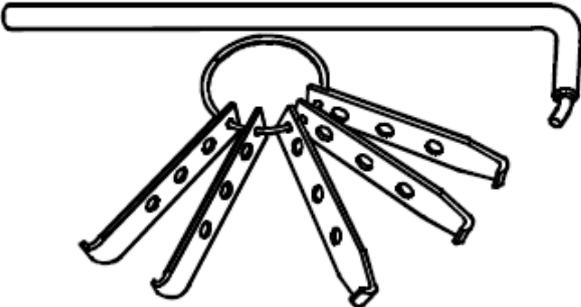
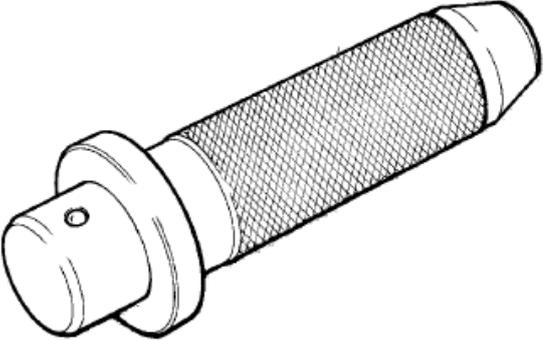
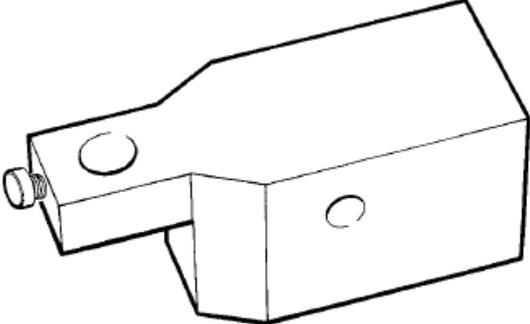
INTRODUCTION

Tool No.	Description	Image
38000670	Oil filter wrench	 <p data-bbox="1054 663 1225 680">OILFILTERWRENCH 7</p>
38000302	Valve spring compressor	 <p data-bbox="1054 1126 1225 1144">VALVESPRINGCOMP 8</p>
38000221	Pliers for removing/refitting piston rings 65 - 110 mm (2.559 - 4.331 in)	 <p data-bbox="1054 1585 1225 1603">PISTONRINGPLIER 9</p>

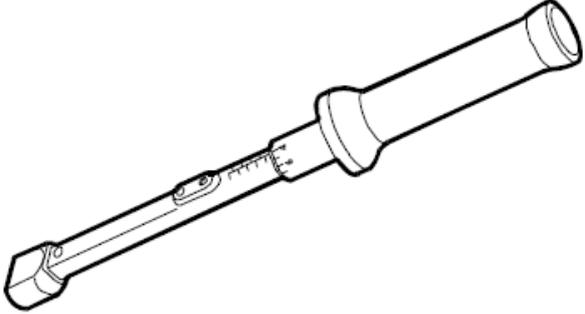
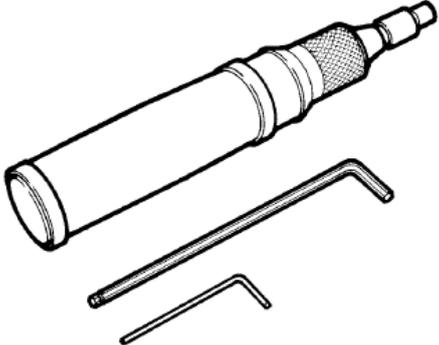
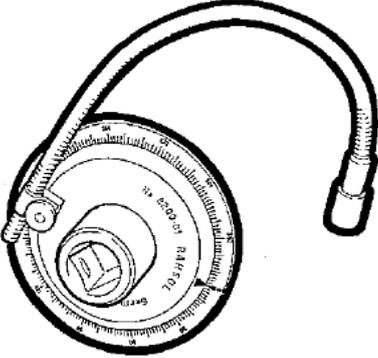
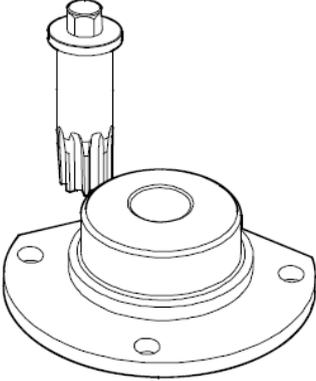
INTRODUCTION

Tool No.	Description	Image
380000667	Beater for removing/refitting camshaft bushes	 <p data-bbox="1002 667 1171 685">CAMBUSHBEATER 10</p>
380000362	Tool for lifting the crankshaft	 <p data-bbox="1018 1126 1155 1144">CRANKHOIST 11</p>
380000216	Engine lifting rig	 <p data-bbox="1018 1585 1155 1603">ENGINEHOIST 12</p>

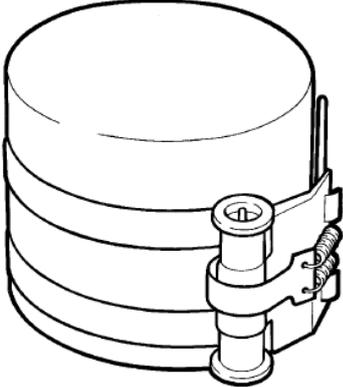
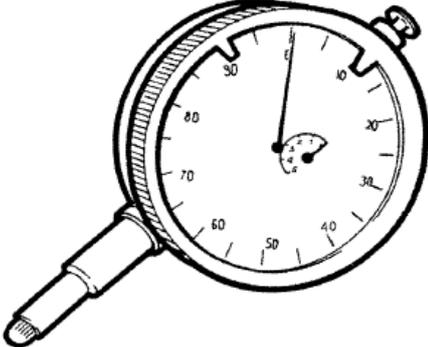
INTRODUCTION

Tool No.	Description	Image
38000661	Brackets for fastening the engine to the revolving stand	 <p data-bbox="1059 663 1222 680">STANDBRACKETS 13</p>
38000669	Seal remover	 <p data-bbox="1066 1111 1216 1128">SEALREMOVER 14</p>
38000668	Hand grip for interchangeable beaters	 <p data-bbox="1082 1570 1200 1588">HANDGRIP 15</p>
38000364	Gauge base for dial indicator	 <p data-bbox="1075 2029 1209 2047">GAUGEBASE 16</p>

INTRODUCTION

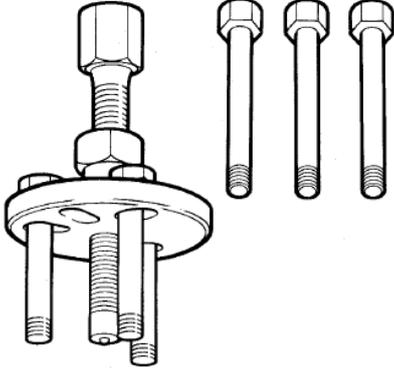
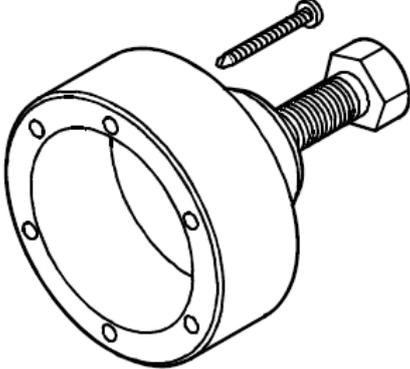
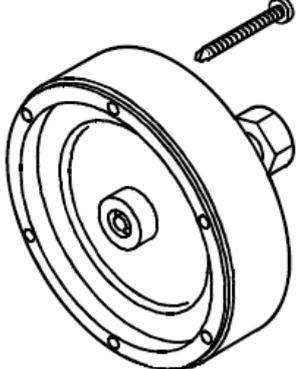
Tool No.	Description	Image
N/A	Torque wrench	 <p data-bbox="1002 636 1166 656">TORQUEWRENCH 17</p>
380000158	Torque screwdriver	 <p data-bbox="991 1095 1177 1115">TORQUESCREWDRIV 18</p>
380000304	Tool for angle tightening	 <p data-bbox="995 1554 1174 1574">ANGLETIGHTENING 19</p>
380000988	Flywheel rotation tool	 <p data-bbox="1031 2016 1142 2036">ROTATOR 20</p>

INTRODUCTION

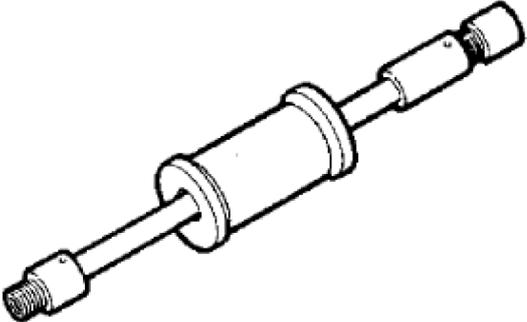
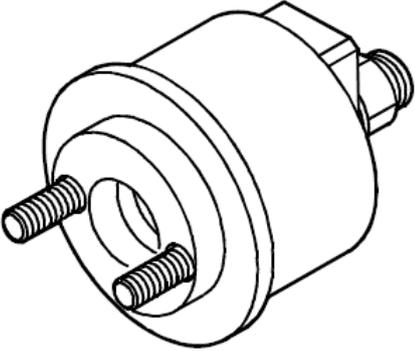
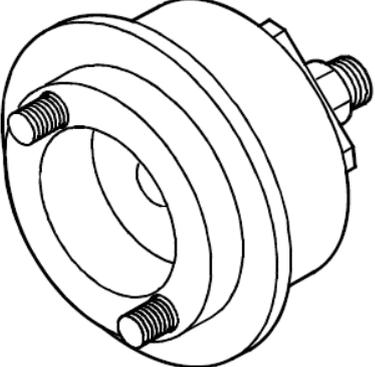
Tool No.	Description	Image
	Piston ring compressor	 <p>PISTONRINGCOMP 21</p>
	Dial indicator (0 - 5 mm (0.000 - 0.197 in))	 <p>DIALINDICATOR 22</p>

Special tools

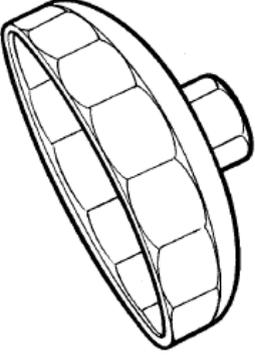
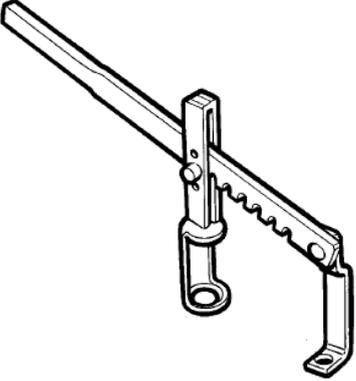
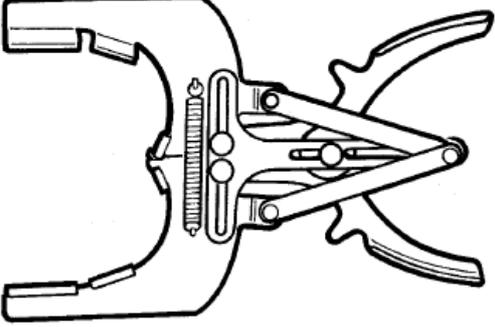
F4CE9484, F4GE9484, F4CE9684, F4GE9684

Tool No.	Description	Image
380000979	Injection pump gear puller	 <p>PUMPGEARPULLER 1</p>
380000665	Crankshaft front seal puller	 <p>FRONTSEALPULLER 2</p>
380000663	Crankshaft rear seal puller	 <p>REARSEALPULLER 3</p>

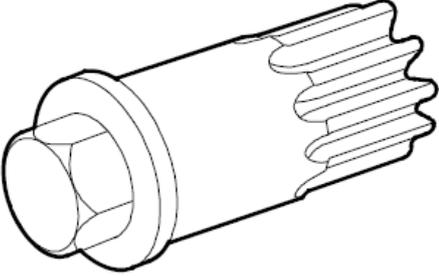
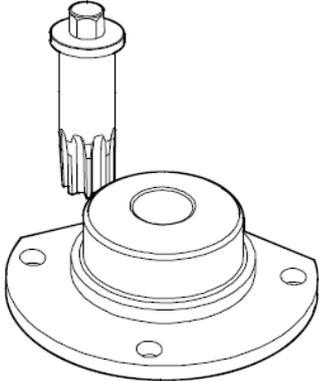
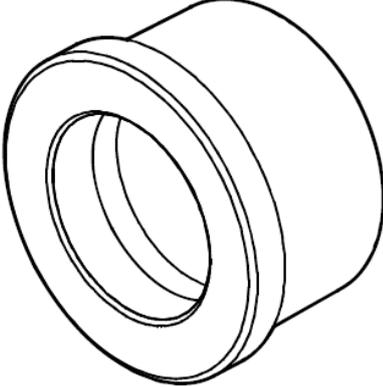
INTRODUCTION

Tool No.	Description	Image
38000671	Injector puller	 <p data-bbox="1054 663 1225 680">INJECTORPULLERG 4</p>
38000666	Crankshaft front seal installer	 <p data-bbox="1054 1122 1225 1140">FRONTSEALINSTAL 5</p>
38000664	Crankshaft rear seal installer	 <p data-bbox="1054 1585 1225 1603">CRANKREARSEALIN 6</p>

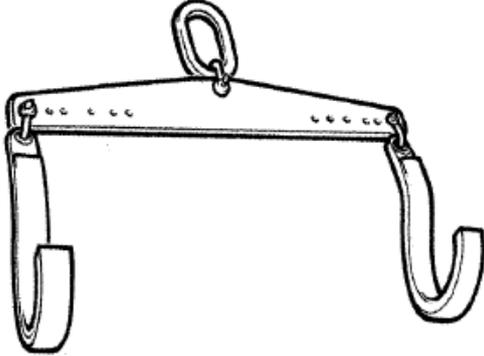
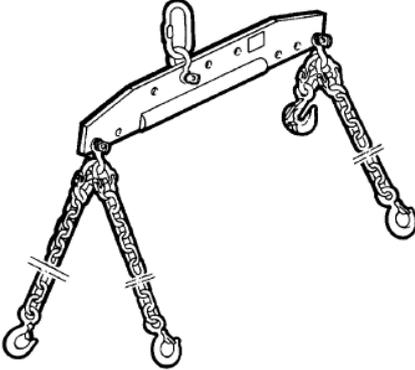
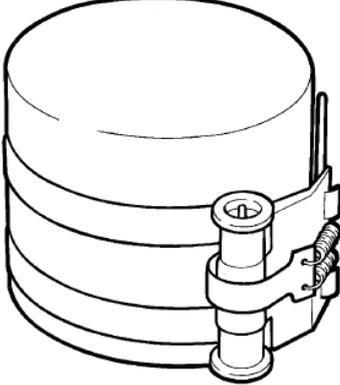
INTRODUCTION

Tool No.	Description	Image
380000670	Oil filter wrench	 <p data-bbox="1007 663 1171 680">OILFILTERWRENCH 7</p>
380000302	Valve spring compressor	 <p data-bbox="1007 1124 1171 1142">VALVESPRINGCOMP 8</p>
380000221	Pliers for removing/refitting piston rings 65 - 110 mm (2.559 - 4.331 in)	 <p data-bbox="1007 1585 1171 1603">PISTONRINGPLIER 9</p>

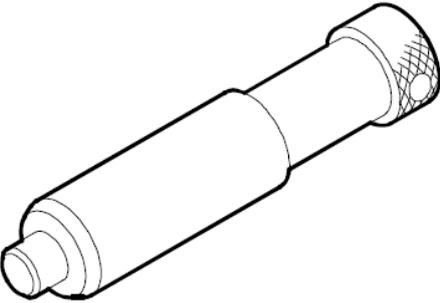
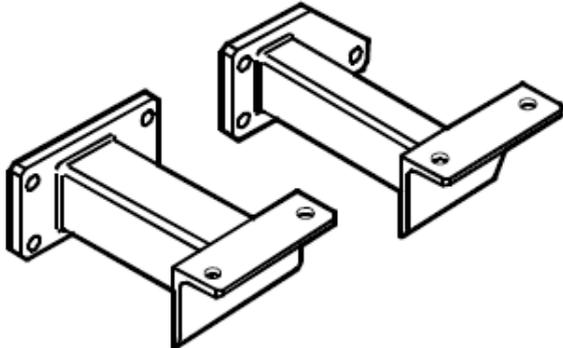
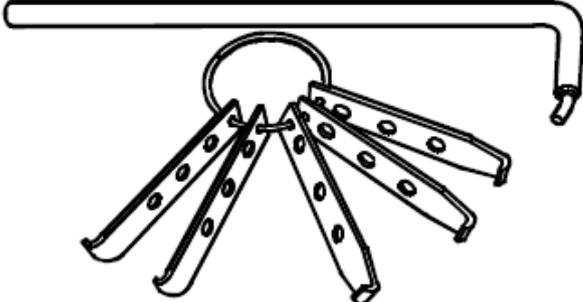
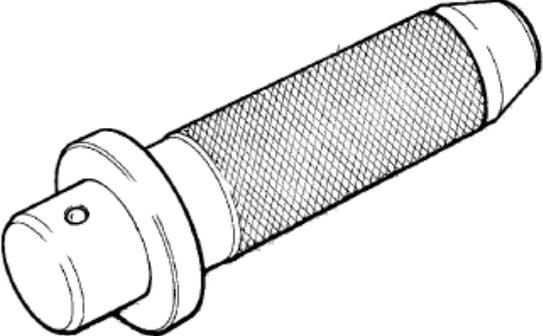
INTRODUCTION

Tool No.	Description	Image
38000732	Flywheel crank handle	 <p data-bbox="1054 667 1225 685">FLYWHEELCRANK 10</p>
38000988	Flywheel rotation tool	 <p data-bbox="1086 1126 1198 1144">ROTATOR 11</p>
38000667	Beater for removing/refitting camshaft bushes	 <p data-bbox="1054 1592 1225 1610">CAMBUSHBEATER 12</p>

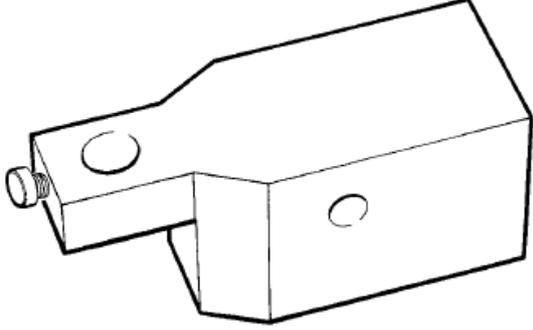
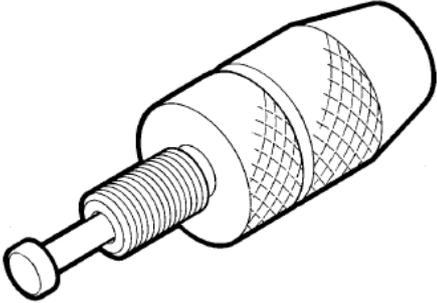
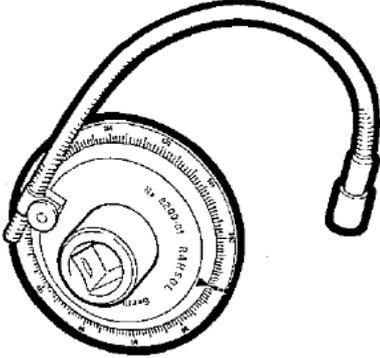
INTRODUCTION

Tool No.	Description	Image
380000362	Tool for lifting the crankshaft	 <p data-bbox="1018 663 1155 680">CRANKHOIST 13</p>
380000216	Engine lifting rig	 <p data-bbox="1018 1126 1155 1144">ENGINEHOIST 14</p>
380000994	Piston ring compressor	 <p data-bbox="1002 1592 1171 1610">PISTONRINGCOMP 15</p>

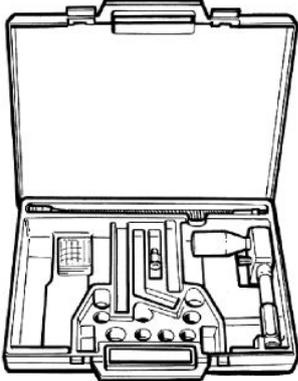
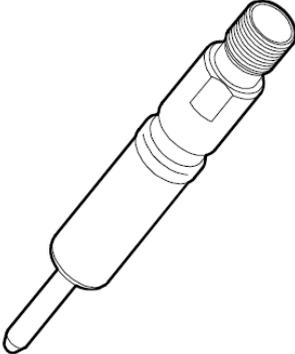
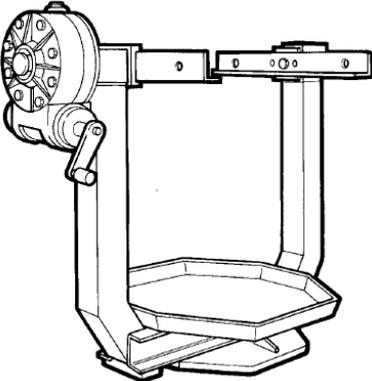
INTRODUCTION

Tool No.	Description	Image
380002729	Engine TDC positioning tool (non-structural engines only)	 <p data-bbox="1082 667 1198 685">TIMINGPIN 16</p>
38000661	Brackets for fastening the engine to the revolving stand	 <p data-bbox="1058 1126 1222 1144">STANDBRACKETS 17</p>
38000669	Seal remover	 <p data-bbox="1066 1574 1214 1592">SEALREMOVER 18</p>
38000668	Hand grip for interchangeable beaters	 <p data-bbox="1082 2033 1198 2051">HANDGRIP 19</p>

INTRODUCTION

Tool No.	Description	Image
380000364	Gauge base for dial indicator	 <p data-bbox="1018 667 1152 685">GAUGEBASE 20</p>
380000229	Dial gauge holder and 0 - 5 mm Dial gauge for rotary injection pump timing.	 <p data-bbox="1002 1124 1168 1142">PUMPTIMEADAPT 21</p>
380000304	Tool for angle tightening	 <p data-bbox="997 1585 1177 1603">ANGLTIGHTENING 22</p>

INTRODUCTION

Tool No.	Description	Image
380001005	Dial gauge 0 - 10 mm	 <p data-bbox="1075 663 1203 680">DIALGAUGE 23</p>
380001006	Diesel engine compression tester	 <p data-bbox="1070 1126 1209 1144">COMPTESTER 24</p>
380000140	Adapter for engine compression tester	 <p data-bbox="1066 1585 1214 1603">COMPADAPTER 25</p>
380000301	Revolving engine stand	 <p data-bbox="1054 2049 1225 2067">REVOLVING STAND 26</p>



DISTRIBUTION SYSTEMS - A

ELECTRICAL POWER SYSTEM - 30.A

**F4CE9484 , F4CE9684 , F4DE9484 , F4DE9684 , F4DE9687 , F4GE9484 ,
F4GE9684 , F4HE9484 , F4HE9684**