

CX240C Crawler Excavator

SERVICE MANUAL

Sample of manual. Download All 3022 pages at:
<https://www.arepairmanual.com/downloads/2016-case-cx240c-crawler-excavator-service-manual-48004712/>

Part number 48004712
English
April 2016
© 2016 CNH Industrial Italia S.p.A. All Rights Reserved.

CASE
CONSTRUCTION



SERVICE MANUAL

CX240C Crawler excavator Standard version (TIER 3) - CHINA Market

Sample of manual. Download All 3022 pages at:

<https://www.arepairmanual.com/downloads/2016-case-cx240c-crawler-excavator-service-manual-48004712/>

48004712 27/04/2016

EN

Contents

INTRODUCTION

Engine.....	10
[10.001] Engine and crankcase	10.1
[10.102] Pan and covers	10.2
[10.106] Valve drive and gears	10.3
[10.101] Cylinder heads	10.4
[10.105] Connecting rods and pistons.....	10.5
[10.103] Crankshaft and flywheel.....	10.6
[10.216] Fuel tanks	10.7
[10.206] Fuel filters	10.8
[10.218] Fuel injection system.....	10.9
[10.202] Air cleaners and lines	10.10
[10.250] Turbocharger and lines.....	10.11
[10.254] Intake and exhaust manifolds and muffler	10.12
[10.501] Exhaust Gas Recirculation (EGR) exhaust treatment.....	10.13
[10.400] Engine cooling system	10.14
[10.414] Fan and drive	10.15
[10.310] Aftercooler.....	10.16
[10.304] Engine lubrication system.....	10.17
[10.408] Oil cooler and lines.....	10.18
Hydraulic systems.....	35
[35.000] Hydraulic systems.....	35.1
[35.300] Reservoir, cooler, and filters.....	35.2
[35.104] Fixed displacement pump.....	35.3
[35.106] Variable displacement pump	35.4
[35.102] Pump control valves.....	35.5
[35.359] Main control valve	35.6

[35.357] Pilot system	35.7
[35.355] Hydraulic hand control	35.8
[35.356] Hydraulic foot control.....	35.9
[35.352] Hydraulic swing system	35.10
[35.353] Hydraulic travel system	35.11
[35.354] Hydraulic central joint	35.12
[35.736] Boom hydraulic system	35.13
[35.737] Dipper hydraulic system.....	35.14
[35.738] Excavator and backhoe bucket hydraulic system.....	35.15
[35.360] Hammer and rotating bucket hydraulic system	35.16
Frames and ballasting	39
[39.140] Ballasts and supports	39.1
Tracks and track suspension	48
[48.130] Track frame and driving wheels.....	48.1
[48.100] Tracks	48.2
[48.134] Track tension units	48.3
[48.138] Track rollers	48.4
Cab climate control	50
[50.100] Heating	50.1
[50.200] Air conditioning	50.2
Electrical systems	55
[55.000] Electrical system	55.1
[55.100] Harnesses and connectors.....	55.2
[55.525] Cab engine controls.....	55.3
[55.015] Engine control system.....	55.4
[55.201] Engine starting system	55.5
[55.301] Alternator	55.6
[55.302] Battery.....	55.7

[55.202] Cold start aid	55.8
[55.010] Fuel injection system	55.9
[55.014] Engine intake and exhaust system	55.10
[55.989] Exhaust Gas Recirculation (EGR) electrical system	55.11
[55.012] Engine cooling system	55.12
[55.013] Engine oil system	55.13
[55.640] Electronic modules	55.14
[55.512] Cab controls	55.15
[55.036] Hydraulic system control	55.16
[55.051] Cab Heating, Ventilation, and Air-Conditioning (HVAC) controls	55.17
[55.050] Heating, Ventilation, and Air-Conditioning (HVAC) control system	55.18
[55.416] Swing control system	55.19
[55.417] Travel control system	55.20
[55.530] Camera	55.21
[55.518] Wiper and washer system	55.22
[55.404] External lighting	55.23
[55.514] Cab lighting	55.24
[55.408] Warning indicators, alarms, and instruments	55.25
[55.992] Anti-theft system	55.26
[55.DTC] FAULT CODES	55.27
Booms, dippers, and buckets	84
[84.910] Boom	84.1
[84.912] Dipper arm	84.2
[84.100] Bucket	84.3
Platform, cab, bodywork, and decals	90
[90.150] Cab	90.1
[90.156] Cab glazing	90.2
[90.120] Mechanically-adjusted operator seat	90.3

[90.100] Engine hood and panels 90.4



INTRODUCTION

Contents

INTRODUCTION

Foreword - Important notice regarding equipment servicing	3
Safety rules	4
Safety rules – General information	5
Safety rules – Personal safety	6
Safety rules – Cab protective structure	8
Safety rules - Ecology and the environment	9
Torque – Bolt and nut	10
Torque – Special torque settings	11
Basic instructions - Shop and assembly	15
General specification	17
General specification - Main equipment	21
Weight	28
Dimension	30
Conversion factors	32
Fluids and lubricants	44
Abbreviation	48
Product identification	51
Product identification - Machine orientation	53

Foreword - Important notice regarding equipment servicing

All repair and maintenance work listed in this manual must be carried out only by qualified dealership personnel, strictly complying with the instructions given, and using, whenever possible, the special tools.

Anyone who performs repair and maintenance operations without complying with the procedures provided herein shall be responsible for any subsequent damages.

The manufacturer and all the organizations of its distribution chain, including - without limitation - national, regional, or local dealers, reject any responsibility for damages caused by parts and/or components not approved by the manufacturer, including those used for the servicing or repair of the product manufactured or marketed by the manufacturer. In any case, no warranty is given or attributed on the product manufactured or marketed by the manufacturer in case of damages caused by parts and/or components not approved by the manufacturer.

The manufacturer reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions, and illustrative material herein are as accurate as known at time of publication but are subject to change without notice.

In case of questions, refer to your CASE CONSTRUCTION Sales and Service Networks.

Safety rules

Personal safety



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible death or injury.

Throughout this manual you will find the signal words DANGER, WARNING, and CAUTION followed by special instructions. These precautions are intended for the personal safety of you and those working with you.

Read and understand all the safety messages in this manual before you operate or service the machine.

▲ DANGER indicates a hazardous situation that, if not avoided, will result in death or serious injury.

▲ WARNING indicates a hazardous situation that, if not avoided, could result in death or serious injury.

▲ CAUTION indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.

FAILURE TO FOLLOW DANGER, WARNING, AND CAUTION MESSAGES COULD RESULT IN DEATH OR SERIOUS INJURY.

Machine safety

NOTICE: *Notice indicates a situation that, if not avoided, could result in machine or property damage.*

Throughout this manual you will find the signal word Notice followed by special instructions to prevent machine or property damage. The word Notice is used to address practices not related to personal safety.

Information

NOTE: *Note indicates additional information that clarifies steps, procedures, or other information in this manual.*

Throughout this manual you will find the word Note followed by additional information about a step, procedure, or other information in the manual. The word Note is not intended to address personal safety or property damage.

Safety rules – General information

Cleaning

Clean the metal parts with cleaning solution that meets the standard and steam cleaning. (except for bearings)

After cleaning, dry well, and inject oil in all parts.

Also inject oil into the bearings after drying.

Inspection

When disassembling parts, check all the parts.

If there are any worn or damaged parts, replace them.

Inspect carefully to prevent initial breakdowns.

Bearing

Replace any loose bearings.

Air dry bearings before installing them.

Needle bearing

When inserting needle bearings, be very careful not to damage them.

Apply grease to the section where the needle bearing will be inserted.

Gear

Check that there is no wear and no damage.

Oil seal, O-ring, gasket

Always install new oil seals, O-rings, and gaskets.

Apply grease to sections where oil seals and O-rings will be inserted.

Shaft

Check that there is no wear and no damage.

Check the bearings and check for damaged oil seals on the shaft.

Service parts

Install CASE CONSTRUCTION genuine service parts.

When placing an order, check the parts catalog. It contains the CASE CONSTRUCTION genuine part numbers.

Any breakdowns arising from the installation of non-genuine parts are not covered by the warranty.

Lubricants (fuel, hydraulic oil)

Use the oil from the specified company or specified in the operator's manual or service Manual.

Any breakdowns arising from any fuel or hydraulic oil other than those specified are not covered by the warranty.

Safety rules – Personal safety

⚠ WARNING:

This symbol indicates a precaution.

It gives information concerning the safety of the operator and those in the surroundings.

Read and understand these precautions thoroughly before performing the work.

Always comply with warnings and precautions so as to avoid any accidents.

This section covers information related to overall safety.

Check whether all warning labels are in place.

Additional labels can be ordered from Service Parts.

⚠ WARNING:

Read the operator's manual to gain a thorough understanding of machine control operations.

⚠ WARNING:

Perform any machine operations from the seating position.

Any other method may cause severe injuries.

⚠ WARNING:

Only the one operator is to ride on the machine. No one else is to ride on it.

⚠ WARNING:

Check the safety messages in the operator's manual before starting the engine.

Check all the warning labels on the machine.

Check that no one is within the machine's operating range.

Check the operating methods in a safe location before starting the actual work.

Understand the machine operations well, then operate in compliance with all service-related laws and regulations.

The operator's manual can be purchased at your CASE CONSTRUCTION dealer.

⚠ WARNING:

Working with sloppy clothes or clothes with which safety cannot be ensured leads to damage to the machine and injury to the operator.

Always wear clothes that ensures safety.

In order to work more safely, it is recommended to wear additional safety equipment.

Helmet, safety shoes, ear protection, goggles, work clothes, and gloves

⚠ WARNING:

Pay careful attention when working with the engine running.

⚠ WARNING:

Check hydraulic equipment.

Work according to the procedure.

Do not change the procedure.

INTRODUCTION

WARNING:

Check that there is no one in the surroundings before draining the pressure from hydraulic circuits during machine hydraulic cylinder inspection.

WARNING:

Use gloves when handling high-temperature parts.

WARNING:

Bring the lower parts or attachments in contact with the ground before inspecting or repairing them.

WARNING:

Check that hoses and tubes are securely connected.
If there is any damage to a hose or tube, replace it.
Do not check for oil leaks by hand. Use cardboard or wood.

WARNING:

When removing an attachment pin or other hardened pin, use a hammer that has a soft head.

WARNING:

Wear eye protection when using a hammer to install a pin or when working with a grinder.
At this time, use goggles or eye protectors that meet standards.

WARNING:

Park the machine in a safe location when repairing or inspecting it.

WARNING:

Use work site protection when repairing the machine.
Check the oil, coolant, grease, and tools.
Recover materials and parts as necessary.
Pay enough attention to safety.

WARNING:

Some of the machine's parts are extremely heavy.
Use an appropriate lifting equipment for such parts.
For weights and procedures, see the Service Manual.

WARNING:

Exhaust gases are toxic.
Always provide good ventilation when working indoors or in any other enclosed space.

WARNING:

If the electrolytic battery solution freezes, it may explode.

Safety rules – Cab protective structure


Cab protective structure

Modifying the cab main components is prohibited in order to protect the operator.

Prohibited items

- Modifications that reduce the strength of a platform that has a cab with a protective structure mounted on it. (Actions or modifications that reduce the functionality of the anchoring part at the left-rear of the cab)
- Modifications that effect the strength of the cab with a protective structure.

Modifications prohibited (red part)	All modifications (grinding, welding, drilling holes, removing, etc.) are prohibited.
Modifications permitted under conditions (gray part)	Removal of parts is prohibited. Bar welding and making holes (up to diameter 20 mm (0.787 in)) by drilling are possible.

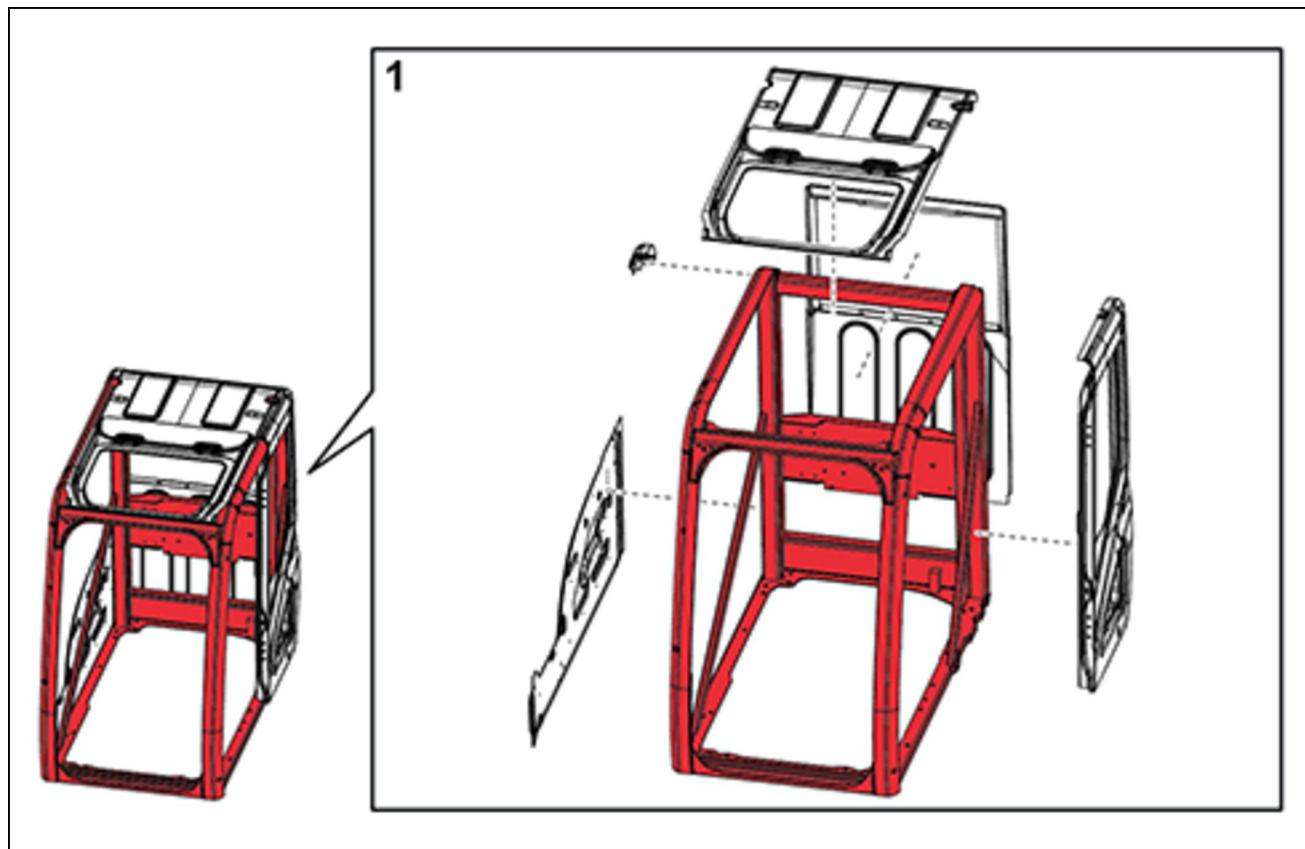

SMPH15CEX6544FA 1

Safety rules - Ecology and the environment

Soil, air, and water quality is important for all industries and life in general. When legislation does not yet rule the treatment of some of the substances that advanced technology requires, sound judgment should govern the use and disposal of products of a chemical and petrochemical nature.

Familiarize yourself with the relative legislation applicable to your country, and make sure that you understand this legislation. Where no legislation exists, obtain information from suppliers of oils, filters, batteries, fuels, anti-freeze, cleaning agents, etc., with regard to the effect of these substances on man and nature and how to safely store, use, and dispose of these substances.

Helpful hints

- Avoid the use of cans or other inappropriate pressurized fuel delivery systems to fill tanks. Such delivery systems may cause considerable spillage.
- In general, avoid skin contact with all fuels, oils, acids, solvents, etc. Most of these products contain substances that may be harmful to your health.
- Modern oils contain additives. Do not burn contaminated fuels and or waste oils in ordinary heating systems.
- Avoid spillage when you drain fluids such as used engine coolant mixtures, engine oil, hydraulic fluid, brake fluid, etc. Do not mix drained brake fluids or fuels with lubricants. Store all drained fluids safely until you can dispose of the fluids in a proper way that complies with all local legislation and available resources.
- Do not allow coolant mixtures to get into the soil. Collect and dispose of coolant mixtures properly.
- The air-conditioning system contains gases that should not be released into the atmosphere. Consult an air-conditioning specialist or use a special extractor to recharge the system properly.
- Repair any leaks or defects in the engine cooling system or hydraulic system immediately.
- Do not increase the pressure in a pressurized circuit as this may lead to a component failure.
- Protect hoses during welding. Penetrating weld splatter may burn a hole or weaken hoses, allowing the loss of oils, coolant, etc.

Battery recycling

Batteries and electric accumulators contain several substances that can have a harmful effect on the environment if the batteries are not properly recycled after use. Improper disposal of batteries can contaminate the soil, groundwater, and waterways. CASE CONSTRUCTION strongly recommends that you return all used batteries to a CASE CONSTRUCTION dealer, who will dispose of the used batteries or recycle the used batteries properly. In some countries, this is a legal requirement.



Mandatory battery recycling

NOTE: The following requirements are mandatory in Brazil.


Batteries are made of lead plates and a sulfuric acid solution. Because batteries contain heavy metals such as lead, CONAMA Resolution 401/2008 requires you to return all used batteries to the battery dealer when you replace any batteries. Do not dispose of batteries in your household garbage.

Points of sale are obliged to:

- Accept the return of your used batteries
- Store the returned batteries in a suitable location
- Send the returned batteries to the battery manufacturer for recycling

Torque – Bolt and nut

- Tighten alternating between left and right and top and bottom so that uniform tightening force is applied.

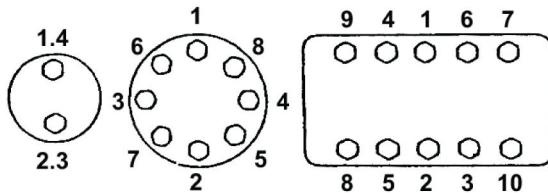

LPIL12CX00005EA 1

- If LoCTITE® was used on a removed bolt (there is something white sticking to the bolt when it is removed), clean the old LoCTITE® off with cleaning fluid, dry the bolt, then apply 2 - 3 drops of LoCTITE® to the thread section of the bolt.

Torque table

Bolt nominal diameter (size)		M6	M8	M10	M12	M14	M16	M18	M20
Hexagon bolt	Wrench	10 mm	13 mm	17 mm	19 mm	22 mm	24 mm	27 mm	30 mm
	Tightening torque	6.9 N·m (5.089 lb ft)	19.6 N·m (14.456 lb ft)	39.2 N·m (28.912 lb ft)	58.8 N·m (43.369 lb ft)	98.1 N·m (72.355 lb ft)	156.9 N·m (115.723 lb ft)	196.1 N·m (144.636 lb ft)	294.2 N·m (216.991 lb ft)
Hexagon socket head bolt	Wrench	5 mm	6 mm	8 mm	10 mm	12 mm	14 mm	14 mm	17 mm
	Tightening torque	8.8 N·m (6.491 lb ft)	21.6 N·m (15.931 lb ft)	42.1 N·m (31.051 lb ft)	78.5 N·m (57.899 lb ft)	117.7 N·m (86.811 lb ft)	176.5 N·m (130.180 lb ft)	245.2 N·m (180.850 lb ft)	343.2 N·m (253.131 lb ft)

Torque – Special torque settings






Code	Retightening location		Bolt nominal diameter	Wrench	Tightening torque
1*	Travel motor		M16	24 mm	267 - 312 N·m (196.93 - 230.12 lb ft)
2*	Drive sprocket		M16	24 mm	267 - 312 N·m (196.93 - 230.12 lb ft)
3*	Take-up roller		M16	24 mm	267 - 312 N·m (196.93 - 230.12 lb ft)
4*	Upper roller		M20	30 mm	521 - 608 N·m (384.27 - 448.44 lb ft)
5*	Lower roller		M18	27 mm	371 - 432 N·m (273.64 - 318.63 lb ft)
6*	Track guard		M18	27 mm	400 - 462 N·m (295.02 - 340.75 lb ft)
7	Shoe		M20	30 mm	755 - 853 N·m (556.86 - 629.14 lb ft)
8	Counterweight		M33	50 mm	1862 - 2058 N·m (1373.34 - 1517.90 lb ft)
9	Turntable bearing		M24	36 mm	784 - 914 N·m (578.25 - 674.13 lb ft)
10*	Swing unit		M24	36 mm	784 - 914 N·m (578.25 - 674.13 lb ft)
11*	Engine	Mount	M16	24 mm	264.9 - 313.9 N·m (195.38 - 231.52 lb ft)
12*		Front bracket	M10	17 mm	63.8 - 73.6 N·m (47.06 - 54.28 lb ft)
13*		Rear bracket	M16	24 mm	205.9 - 247.1 N·m (151.86 - 182.25 lb ft)
14	Radiator		M16	24 mm	147.2 - 176.6 N·m (108.57 - 130.25 lb ft)
15*	Hydraulic pump	Pump	M20	17 mm hexagon socket head	367 - 496 N·m (270.69 - 365.83 lb ft)
16*	Hydraulic tank		M16	24 mm	232.4 - 276 N·m (171.41 - 203.57 lb ft)
17*	Fuel tank		M16	24 mm	232.4 - 276 N·m (171.41 - 203.57 lb ft)
18*	Control valve		M16	24 mm	267 - 312 N·m (196.93 - 230.12 lb ft)
19*	Center Joint	Lock bar	M12	19 mm	88.3 - 107 N·m (65.13 - 78.92 lb ft)
20*		Joint	M12	19 mm	109 - 127 N·m (80.39 - 93.67 lb ft)
21	Cab		M16	24 mm	149 - 173 N·m (109.90 - 127.60 lb ft)
22	Battery		M10	17 mm	19.6 - 29.4 N·m (14.46 - 21.68 lb ft)









CAUTION: For items marked with *, always apply **LOCTITE® 262™** or the equivalent and tighten to the specified torque.

The tightening torque in kgf·m is determined with N· m ÷ 9.8 (lbf· ft ÷ 7.2).






INTRODUCTION

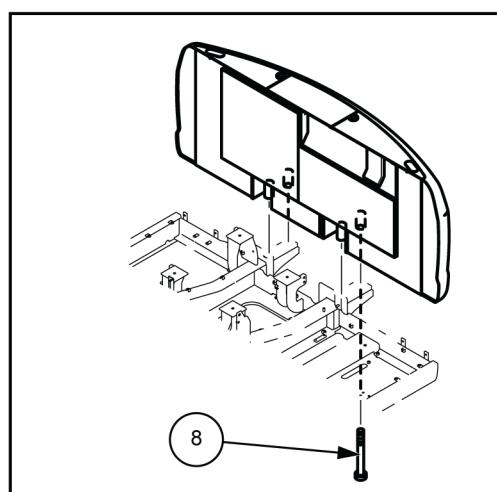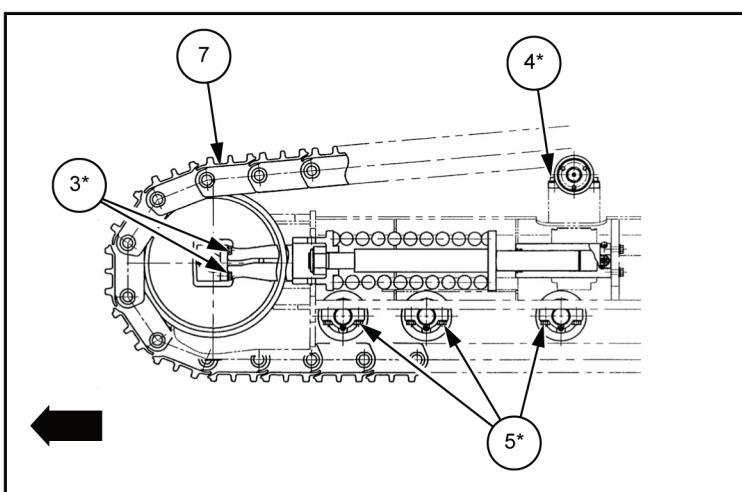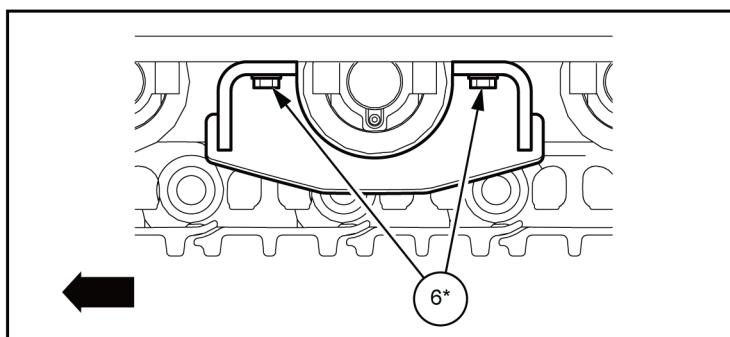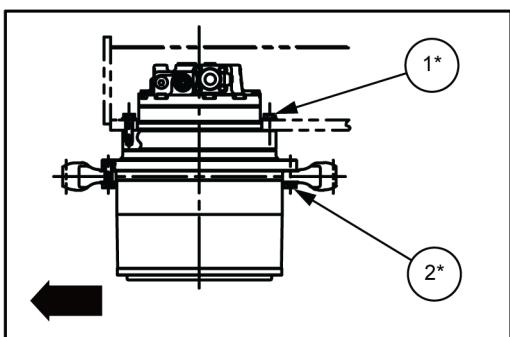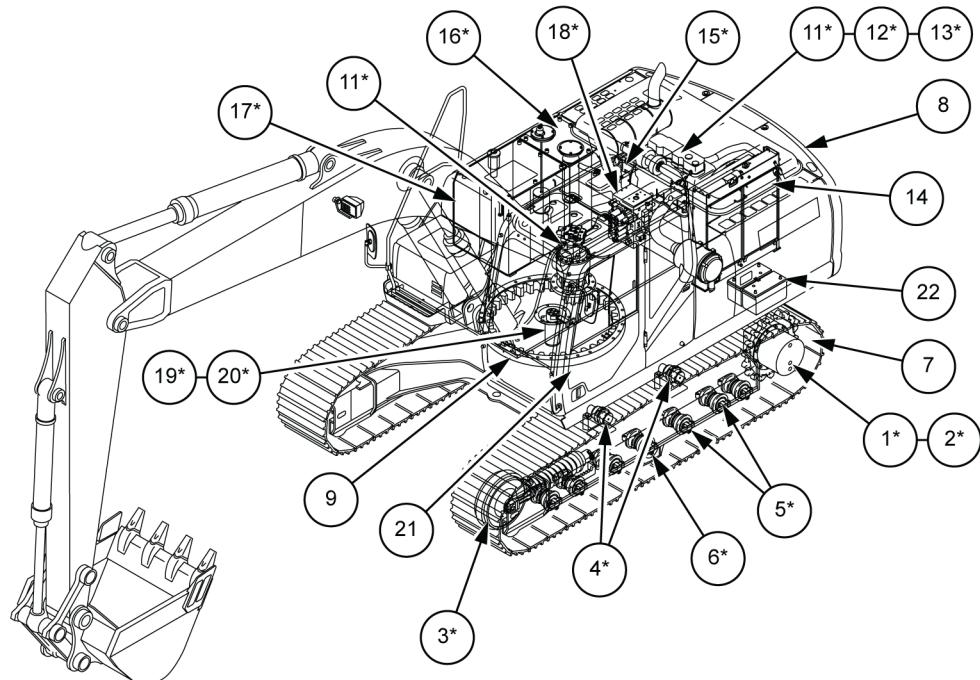

INTRODUCTION

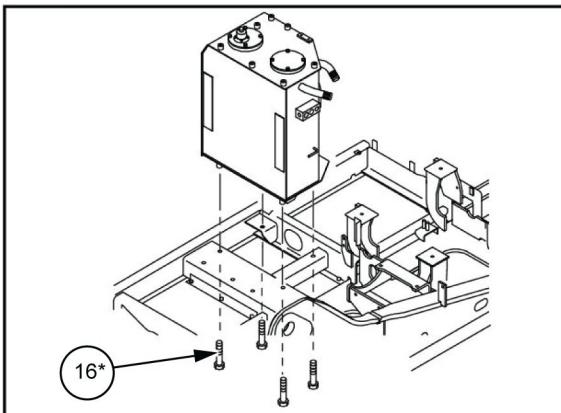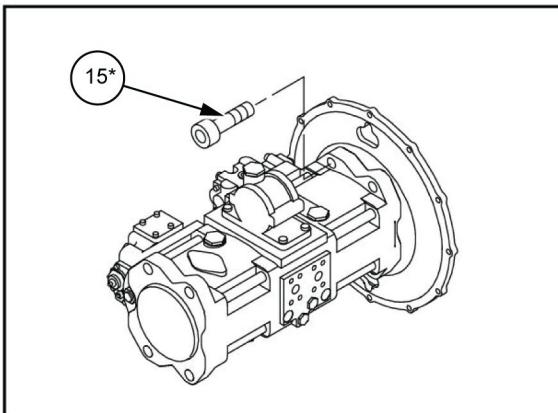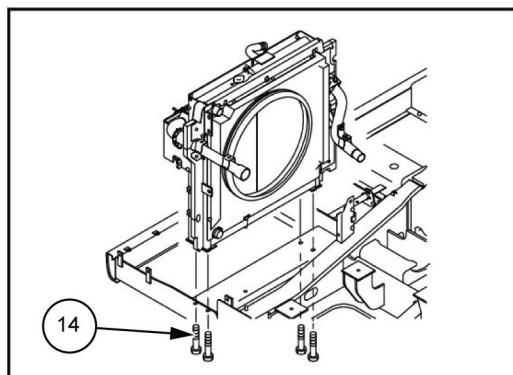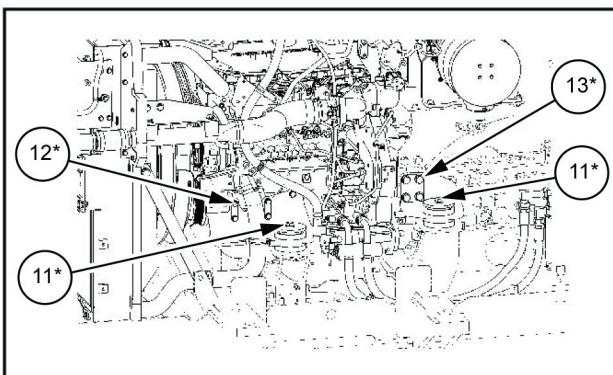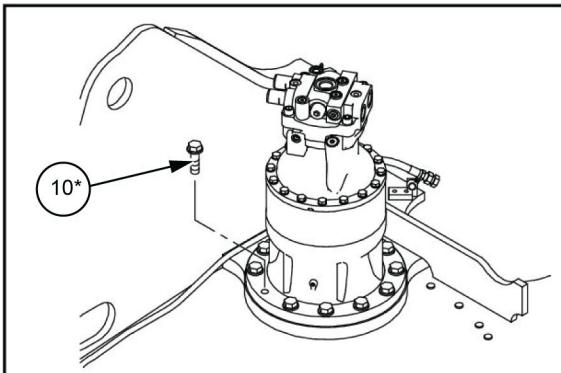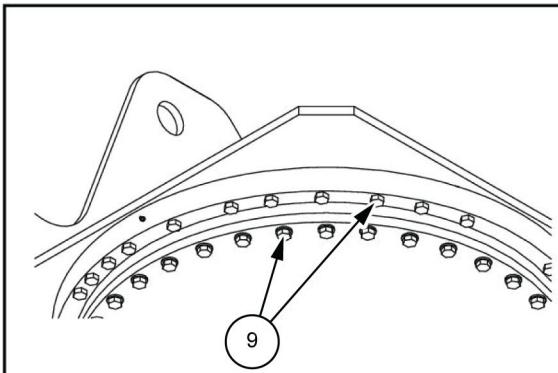

INTRODUCTION

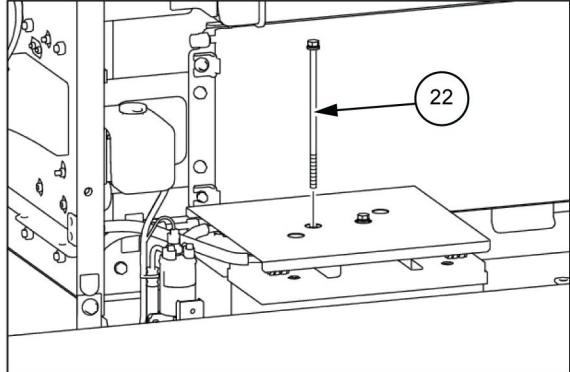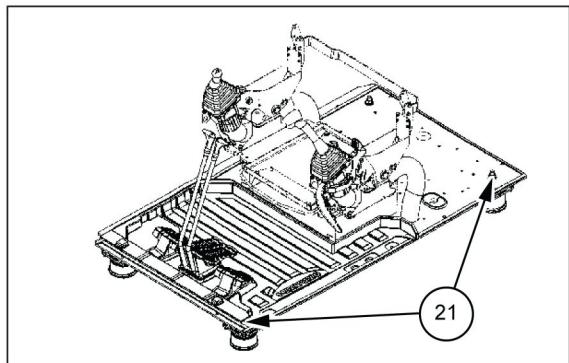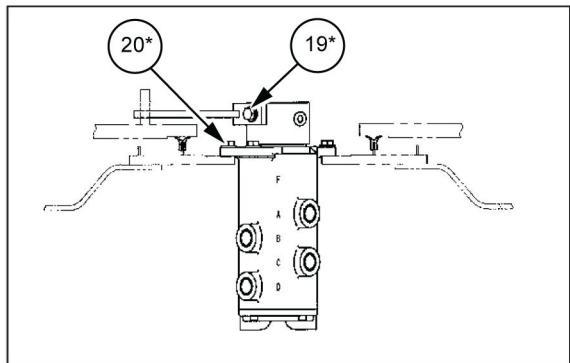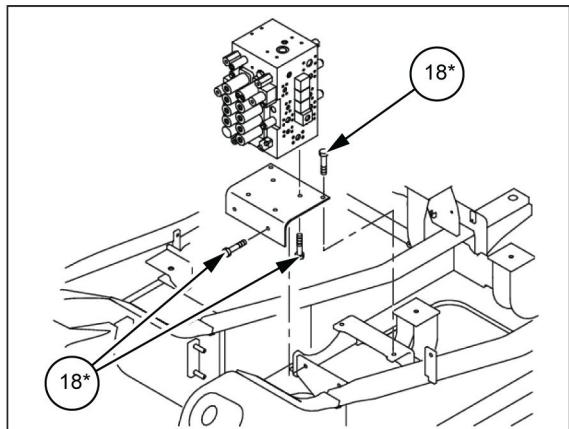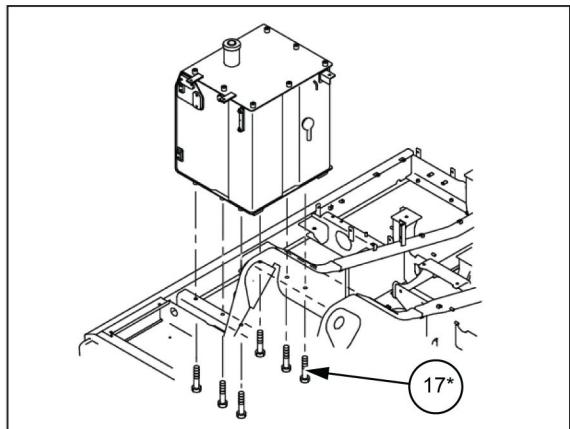

Basic instructions - Shop and assembly

Shimming

For each adjustment operation, select adjusting shims and measure the adjusting shims individually using a micrometer, then add up the recorded values. Do not rely on measuring the entire shimming set, which may be incorrect, or the rated value shown on each shim.

Rotating shaft seals

For correct rotating shaft seal installation, proceed as follows:

1. Before assembly, allow the seal to soak in the oil it will be sealing for at least thirty minutes.
2. Thoroughly clean the shaft and check that the working surface on the shaft is not damaged.
3. Position the sealing lip facing the fluid.

NOTE: *With hydrodynamic lips, take into consideration the shaft rotation direction and position the grooves so that they will move the fluid towards the inner side of the seal.*

4. Coat the sealing lip with a thin layer of lubricant (use oil rather than grease). Fill the gap between the sealing lip and the dust lip on double lip seals with grease.
5. Insert the seal in its seat and press down using a flat punch or seal installation tool. Do not tap the seal with a hammer or mallet.
6. While you insert the seal, check that the seal is perpendicular to the seat. When the seal settles, make sure that the seal makes contact with the thrust element, if required.
7. To prevent damage to the seal lip on the shaft, position a protective guard during installation operations.

O-ring seals

Lubricate the O-ring seals before you insert them in the seats. This will prevent the O-ring seals from overturning and twisting, which would jeopardize sealing efficiency.

Sealing compounds

Apply a sealing compound on the mating surfaces when specified by the procedure. Before you apply the sealing compound, prepare the surfaces as directed by the product container.

Spare parts

Only use CNH Original Parts or CASE CONSTRUCTION Original Parts.

Only genuine spare parts guarantee the same quality, duration, and safety as original parts, as they are the same parts that are assembled during standard production. Only CNH Original Parts or CASE CONSTRUCTION Original Parts can offer this guarantee.

When ordering spare parts, always provide the following information:

- Machine model (commercial name) and Product Identification Number (PIN)
- Part number of the ordered part, which can be found in the parts catalog

Protecting the electronic and/or electrical systems during charging and welding

To avoid damage to the electronic and/or electrical systems, always observe the following practices:

1. Never make or break any of the charging circuit connections when the engine is running, including the battery connections.
2. Never short any of the charging components to ground.
3. Always disconnect the ground cable from the battery before arc welding on the machine or on any machine attachment.
 - Position the welder ground clamp as close to the welding area as possible.
 - If you weld in close proximity to a computer module, then you should remove the module from the machine.
 - Never allow welding cables to lie on, near, or across any electrical wiring or electronic component while you weld.
4. Always disconnect the negative cable from the battery when charging the battery in the machine with a battery charger.

NOTICE: *If you must weld on the unit, you must disconnect the battery ground cable from the machine battery. The electronic monitoring system and charging system will be damaged if this is not done.*

5. Remove the battery ground cable. Reconnect the cable when you complete welding.

WARNING

Battery acid causes burns. Batteries contain sulfuric acid.

Avoid contact with skin, eyes or clothing. Antidote (external): Flush with water. Antidote (eyes): flush with water for 15 minutes and seek medical attention immediately. Antidote (internal): Drink large quantities of water or milk. Do not induce vomiting. Seek medical attention immediately.

Failure to comply could result in death or serious injury.

W0111A

Special tools

The special tools that CASE CONSTRUCTION suggests and illustrate in this manual have been specifically researched and designed for use with CASE CONSTRUCTION machines. The special tools are essential for reliable repair operations. The special tools are accurately built and rigorously tested to offer efficient and long-lasting operation.

By using these tools, repair personnel will benefit from:

- Operating in optimal technical conditions
- Obtaining the best results
- Saving time and effort
- Working in safe conditions

General specification

Engine

Type	Water-cooled, 4-cycle diesel, 4-cylinder in line, High pressure common rail system (electric control), Turbocharger with air cooled intercooler	
Model	ISUZU GH-4HK1X	
Rated flywheel horse power (SAE J1349 NET)		132.1 kW (179.606 Hp) (2000 RPM)
Piston displacement	5.193 L (1.37185 US gal)	
Maximum torque (SAE J1349 NET)		621 N·m (458.03 lb ft) (1800 RPM)
Bore and stroke	115 mm (4.528 in) x 125 mm (4.921 in)	
Voltage	24 V	
Alternator	50 A	
Starter	24 V 5.0 kW	

Hydraulic system

Main pumps	2 variable displacement axial piston pumps with regulating system	
Max. oil flow		2 x 234 L/min (61.816 US gpm) (2000 RPM)
Working circuit pressure	Boom/Arm/Bucket	34.3 MPa (4975.2 psi)
		36.8 MPa (5337.840 psi) with auto power up
	Swing circuit	28.9 MPa (4191.945 psi)
	Travel circuit	34.3 MPa (4975.2 psi)
Pilot pump	1 gear pump	
Max. oil flow		20 L/min (5.283 US gpm)
Working circuit pressure		3.9 MPa (565.7 psi)
Control valves	With Boom/Arm holding valve	
	One 4-spool valve for Right track travel, Bucket, Boom and Arm acceleration	
	One 5-spool valve for Left track travel, Auxiliary, Swing, Boom acceleration and Arm	
Swing device		
Motor	Fixed displacement axial piston motor	
Brake	Mechanical disc brake	
Final drive	Planetary gear reduction	
Turn table bearing	Ball bearing type with internal gear	
Maximum swing speed	11 RPM	
Swing torque	74900 N·m (55243.40 lb ft)	
Cylinders	NO. of cylinders – bore X Rod diameter X Stroke	
Boom	2 x Ø 130 mm (5.118 in) - Ø 90 mm (3.543 in) - 1335 mm (52.559 in)	
Arm	1 x Ø 145 mm (5.709 in) - Ø 105 mm (4.134 in) - 1660 mm (65.354 in)	
Bucket	1 x Ø 130 mm (5.118 in) - Ø 90 mm (3.543 in) - 1070 mm (42.126 in)	
Cooling system		
Fan	Ø 650 mm (25.591 in) with 7-blades	
Radiator capacity	105.9 kW	
	Fin type	Corrugated fin (wavy type)
	Fin space	1.75 mm (0.06890 in)
Long life coolant	Coolant 55 %, Water 45 %	
Oil cooler capacity	54.1 kW	
	Fin type	Corrugated fin (wavy type)
	Fin space	2.0 mm (0.07874 in)
Intercooler capacity	16.7 kW	
	Fin type	Corrugated fin (wavy type)
	Fin space	1.75 mm (0.06890 in)
Fuel cooler capacity	1.3 kW	

INTRODUCTION

	Fin type	Corrugated fin (wavy type)
	Fin space	2.0 mm (0.0787 in)
Filters		
Suction filter		105 µm
Return filter		6 µm
Pilot line filter		8 µm

Hydraulic controls

Boom/Arm/Bucket/Swing	Pilot pressure control system (ISO control pattern)
Travel	Pilot pressure control system
Work mode select	SP - mode
	H - mode
	Auto - mode
Travel mode select	2 - speed travel
Attachment cushion control	
Hydraulic lock (gate lock, left side tilt console)	

Electrical system

Engine control	Dial type throttle control One touch idle / Auto deceleration / Auto idle shutdown system Emergency stop
Monitor system	Message display (Caution, condition, etc...) Work mode display (SP, H, Auto) Machine condition (Power boost, etc...) Alarm display and buzzer Water temperature Hydraulic oil temperature Fuel level Diagnosis system
Wire harness	Waterproof type connector
Safety	Travel alarm Double horn
Battery	2 x 12 V 92 A·h /5HR
Lights	
Working light	Upper Boom
Operator's cab room	24 V 10 W x 1

Operator environment

Operator's cab	
	Smooth and round shape design cab, fabricated by press work
	Safety glass for all windows
	Shock-less cab suspension by 4-point fluid mounting
	Sliding front window with auto lock
	Built-in type full-color LCD monitor display
	Membrane switch on monitor display
	Windshield wiper & washer
	AM/FM Radio with auto-tuner
	Floor mat
	Hinged skylight

INTRODUCTION

Auto air-conditioner
Top guard OPG level 1 (in CAB structure)
Operator's seat
Cloth upholstered type seat with suspension
Reclining and sliding seat
Others
Rear view mirror (Cab side & Right side)

Undercarriage

Travel motor	Variable displacement axial piston motor	
Brake	Mechanical disc brake	
Hydraulic service brake	Brake valve	
Final drive	Planetary gear reduction	
Travel speeds	High	5.5 km/h (3.418 mph) (Automatic travel speed shifting)
	Low	3.5 km/h (2.175 mph)
Drawbar pull	201 kN (45186.598 lb)	
Number of carrier rollers (each side)	2	
Number of carrier rollers (each side)	8	
Number of shoes (each side)	47	
Type of shoe	Triple grouser shoe	
Link pitch	190 mm (7.480 in)	
Width of shoe	600 mm (23.622 in) (S.T.D)	
Grade-ability	70 % (35 °)	

Mass

Operating mass	24800 kg (54674.641 lb)
	with 3.0 m (9.843 ft) Arm, 1.2 m³ Bucket, 600 mm (23.622 in) grouser shoe, operator, lubricant, coolant and full fuel tank
Shipping mass	23400 kg (51588.169 lb)
	Operating mass - (operator mass [75 kg (165.35 lb)]) + 90 % of fuel mass [306 kg (674.615 lb)] + bucket mass [1012 kg (2231.078 lb)]
Counter weight mass	5400 kg (11904.962 lb)
Ground pressure	0.05 MPa (7.25250 psi)
	with 3.0 m (9.8425 ft) Arm, 1.2 m³ Bucket, 600 mm (23.622 in) grouser shoe

Digging force (with 1.0 m³ Bucket) (ISO 6015)

	[3.0 m (9.8425 ft)] Arm	[2.5 m (8.2021 ft)] Arm
Arm digging force	120 kN (26977.07 lb)	141 kN (31698.06 lb)
With auto power up	129 kN (29000.35 lb)	151 kN (33946.15 lb)
Bucket digging force	162 kN (36419.05 lb)	162 kN (36419.05 lb)
With auto power up	174 kN (39116.76 lb)	174 kN (39116.76 lb)

Dimensions

	[3.0 m (9.8425 ft)] Arm	[2.5 m (8.2021 ft)] Arm
Overall length (without attachment)	5070 mm (199.606 in)	5070 mm (199.606 in)
Overall length (with attachment)	9930 mm (390.945 in)	9980 mm (392.913 in)
Overall height (with attachment)	3150 mm (124.016 in)	3310 mm (130.315 in)
Cab height	3000 mm (118.110 in)	3000 mm (118.110 in)
Upper structure overall width	2840 mm (111.811 in)	2840 mm (111.811 in)
Swing (rear end) radius	2950 mm (116.142 in)	2950 mm (116.142 in)
Clearance height under upper structure	1100 mm (43.307 in)	1100 mm (43.307 in)
Minimum ground clearance	440 mm (17.323 in)	440 mm (17.323 in)
Wheel base (Center to center of wheels)	3460 mm (136.220 in)	3460 mm (136.220 in)

INTRODUCTION

Crawler overall length	4240 mm (166.929 in)	4240 mm (166.929 in)
Track gauge	2390 mm (94.094 in)	2390 mm (94.094 in)
Undercarriage overall width [with 600 mm (23.622 in) shoes]	2990 mm (117.717 in)	2990 mm (117.717 in)
Crawler tracks height	940 mm (37.008 in)	940 mm (37.008 in)

Working ranges

	[3.0 m (9.843 ft)] Arm	[2.5 m (8.202 ft)] Arm
Boom length	5850 mm (230.315 in)	5850 mm (230.315 in)
Bucket radius	1580 mm (62.205 in)	1580 mm (62.205 in)
Bucket wrist action	175 °	175 °
Maximum reach at GRP	10100 mm (397.638 in)	9630 mm (379.134 in)
Maximum reach	10280 mm (404.724 in)	9820 mm (386.614 in)
Max. digging depth	6900 mm (271.654 in)	6400 mm (251.969 in)
Max. digging height	9760 mm (384.252 in)	9560 mm (376.378 in)
Max. dumping height	6760 mm (266.142 in)	6550 mm (257.874 in)

General specification - Main equipment

Lower component

Travel unit

Manufacturer	KYB Corporation
Motor type	Variable displacement piston motor
	Automatic 2-speed switchover with parking brake
Intake amount	181.3 cm³/rev (11.06 in³/rev)
Operating pressure	34.3 MPa (4975 psi)
Operating flow	234.0 l/min (234.0000 US gpm)
Brake torque	32700 N·m (24118 lb ft) min. (including reduction gear)
Relief valve set pressure	35.3 MPa (5120 psi) at 40 l/min (10.57 US gpm)
Automatic 2-speed switch over pressure	25.8 MPa (3742 psi)
Reduction gear	
Reduction gear type	Planetary gear 2-stage reduction gear
Reduction ratio	43.246
Dry weight	271 kg (597.453 lb)

Take-up roller

Weight	104.3 kg (229.9421 lb)
--------	-------------------------------

Upper roller

Weight	17.8 kg (39.2423 lb)
--------	-----------------------------

Lower roller

Weight	39.5 kg (87.0826 lb)
--------	-----------------------------

Recoil spring

Item	Weight	Quantity
Yoke	23.9 kg (52.6905 lb)	1
Sems B M16 x 50	0.1 kg (0.2205 lb)	4
Threaded rod	28.5 kg (62.8317 lb)	1
Groove height N M48	1.3 kg (2.8660 lb)	1
SP pin 8 x 80	0.1 kg (0.2205 lb)	1
Recoil spring	64.6 kg (142.4186 lb)	1
Grease cylinder assembly	32.8 kg (72.3116 lb)	1
Sems B M16 x 60	0.2 kg (0.4409 lb)	2
Assembly (total)	152 mm (5.984 in)	
Mounting length of spring	576 mm (22.68 in)	

Shoe

	Weight or Quantity
600 grouser	1360 kg (2998.287 lb)
Link	1 set
Shoe	47
Bolt	188
Nut	188
800 grouser	1627 kg (3586.921 lb)
Link	1 set
Shoe	47
Bolt	188
Nut	188

Upper component

Swing unit

Swing motor assembly	
Swing motor	
Manufacturer	Kawasaki Heavy Industries, Ltd.
Motor type	Fixed displacement piston motor
	With parking brake
Intake amount	148.5 cm³/rev (9.06 in³/rev)
Operating pressure	28.9 MPa (4191.945 psi)
Operating flow	214 l/min (214.000 US gpm)
Mechanical brake torque	846 N·m (623.978 lb ft) min.
Brake off pressure	2.9 MPa (420.645 psi) or less
Relief valve set pressure	28.9 MPa (4191.945 psi)
Swing reduction gear	
Reduction gear type	Planetary gear 2-stage reduction gear
Reduction ratio	21.75
Dry weight	293 kg (645.954 lb)
Turntable bearing	
No. of teeth	92
Weight	373 kg (822.324 lb)
Counterweight	
Weight	5400 kg (11904.962 lb)

Engine-related

Engine

Engine model name	Isuzu 4HK1X diesel engine
Engine type	4-cycle, water-cooled, overhead camshaft type straight cylinder, direct fuel injection type (electronic control)
Number of cylinders-bore-stroke	4 - Ø115 mm (4.53 in) - 125 mm (4.92 in)
Total displacement	5.193 l (1.3718 US gal)
Compression ratio	17.5
Rated output	132.1 kW (179.606 Hp) / 2000 RPM
Maximum torque	621 N·m (458.026 lb ft) / about 1500 RPM
Fuel consumption ratio	*** g/kWh at 2000 RPM
Engine dry weight	About 480 kg (1058.219 lb)
Engine dimension	L 1020.4 mm (40.1732 in) - W 829.0 mm (32.638 in) - H 1011.8 mm (39.8346 in)
Cooling fan	Ø650 mm (25.591 in) - suction type - 7 vanes, plastic
	With bell mouth-type fan guide
Pulley ratio	0.85 (reduction)
Charging generator	24 V 50 A AC type
Starter motor	24 V 5 kW (6.8 Hp) reduction type
Coolant capacity	14.0 l (14.000 US gal)
Oil pan capacity	Max: 20.5 l (5.416 US gal) Min: 13.0 l (3.434 US gal) (not including oil filter)
Direction of rotation	Right (viewed from fan side)
	Compliant with JISD 0006-2000

Muffler

Manufacturer	Sankei Giken Kogyo Co., Ltd.
Type	D 280 x 700 L
Maximum displacement	31800 L/min (8400.7 US gpm)
Weight	15 kg (33.0693 lb)

Air cleaner (double element)

Manufacturer	Nippon Donaldson, Ltd.
Element (outer)	
Element (inner)	
Weight	7.5 kg (16.5347 lb)

Radiator

Manufacturer	T.Rad Co., Ltd.	
Oil cooler	Weight	32.3 kg (71.2093 lb)
	Oil volume	13.6 L (13.6000 US gal)
Radiator	Weight	17 kg (37.4786 lb)
	Coolant capacity	10 L (10.000 US gal)
Air cooler	Weight	7.3 kg (16.0937 lb)
	Capacity	-
Fuel cooler	Weight	1.1 kg (2.4251 lb)
	Capacity	0.44 L (0.1162 US gal)
Total weight		115 kg (253.532 lb)

Hydraulic device**Hydraulic pump**

Manufacturer	Kawasaki Heavy Industries, Ltd.	
Main pump		
Pump type	Double variable displacement piston pump	
Displacement capacity	118.5 cm³/rev (7.231 in³/rev) x 2	
Operating pressure	Rated	34.3 MPa (4975 psi)
	Maximum	36.8 MPa (5337.84 psi)
Input revolution speed	2000 RPM	
Maximum discharge flow	234 L/min (234.000 US gpm) x 2 (at 2000 RPM)	
Pilot pump		
Pump type	Gear pump	
Displacement capacity	10 cm³/rev (0.61 in³/rev)	
Operating pressure	3.92 MPa (569 psi)	
Maximum discharge flow	20 L (5.283 US gal) (at 2000 RPM)	
Control method	Hydraulic simultaneous constant output control Maximum flow adjustment control through external commands (negative control) Setting through external command milli-amp Horsepower adjustment control	
Dry weight	127 kg (279.987 lb)	

Control-related**Control valve**

Manufacturer	KYB Corporation
Maximum flow	237 L/min (62.609 US gpm) (at 2000 RPM)
Overload set pressure	29.4 MPa (4264 psi) boom down
	38.7 MPa (5613 psi) other
Main relief set pressure	34.3 MPa (4975 psi)
(at boosting)	36.8 MPa (5338 psi)
Foot relief set pressure	2.55 MPa (370 psi)
Function	Straight travel circuit
	Boom-up/arm 2 pumps internal flow
	Boom and arm load holding circuit
	Boom-down regenerative circuit

Sample of manual. Download All 3022 pages at:

<https://www.arepairmanual.com/downloads/2016-case-cx240c-crawler-excavator-service-manual-48004712/>