

Shop Manual

HD785-3

HD985-3

DUMP TRUCK

SERIAL NUMBERS **HD785-3 - 2001**
HD985-3 - 1001 and up

This material is proprietary to Komatsu America International Company and is not to be reproduced, used, or disclosed except in accordance with written authorization from Komatsu America International Company.

It is our policy to improve our products whenever it is possible and practical to do so. We reserve the right to make changes or add improvements at any time without incurring any obligation to install such changes on products sold previously.

Due to this continuous program of research and development, periodic revisions may be made to this publication. It is recommended that customers contact their distributor for information on the latest revision.

Sample of manual. Download All 1023 pages at:

<https://www.arepairmanual.com/downloads/komatsu-hd785-3hd985-3-rigid-dump-truck-service-repair-workshop-manualebd056103>

CONTENTS

	No. of page
10 STRUCTURE AND FUNCTION	10-1
20 TESTING AND ADJUSTING	20-1
30 DISASSEMBLY AND ASSEMBLY	30-1
40 MAINTENANCE STANDARD	40-1
90 OTHERS	90-1

★ For details of the applicable serial numbers for the contents of each item in this shop manual, see CONTENTS for each section.

<Explanation of applicable serial numbers>

1. When no model is listed after the CONTENTS : Applicable to both HD785 and HD985
2. When a model is listed in () after the CONTENTS : Applicable only to the model given in ().

056103

The affected pages are indicated by the use of the following marks. It is requested that necessary actions be taken to these pages according to the table below.

Mark	Indication	Action required
○	Page to be newly added	Add
●	Page to be replaced	Replace
()	Page to be deleted	Discard

Pages having no marks are those previously revised or made additions.

LIST OF REVISED PAGES

Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number
●	00-1	⑪		10-15		●	10-51	⑪		10-87			10-108-7	⑧
●	00-2	⑪		10-16		●	10-52	⑪		10-88			10-108-8	⑧
●	00-2-1	⑪		10-17			10-52-1	⑦		10-89			10-109	
●	00-2-2	⑪		10-18			10-52-2	⑦		10-90			10-110	
●	00-2-3	⑪		10-19			10-53			10-91			10-111	
●	00-2-4	⑪		10-20			10-54			10-92			10-112	⑤
●	00-2-5	⑪		10-21			10-55			10-93			10-113	⑤
●	00-3			10-22			10-56			10-94			10-114	
●	00-4			10-23			10-57			10-95			10-115	
●	00-5			10-24			10-58		●	10-96-2	⑪		10-116	
●	00-6			10-25			10-59			10-96-3	④		10-117	⑦
●	00-7			10-26			10-60		●	10-98	⑪		10-120	⑦
●	00-8			10-27			10-61			10-99	⑥		10-121	
●	00-9			10-28			10-62		●	10-100-1	⑪		10-122	
●	00-10			10-29			10-63			10-100-2	⑦		10-123	
●	00-11			10-30			10-64		○	10-100-5	⑪		10-124	
●	00-12			10-31-1	⑧		10-64-1	⑦	○	10-100-6	⑪		10-125	
●	00-13			10-31-2	⑧		10-64-2	⑦	○	10-100-8	⑪		10-126	
●	00-14			10-31-3	⑧		10-64-3	⑦	○	10-100-11	⑪		10-127	
●	00-15			10-31-4	⑧		10-65		○	10-100-12	⑪		10-128	
●	00-16			10-32			10-66		○	10-100-14	⑪		10-129	
●	00-17			10-33			10-67		○	10-100-17	⑪		10-130	④
●	00-18			10-34			10-68		○	10-100-18	⑪		10-131	
●	00-19			10-34-2	⑦		10-69			10-101			10-132	
○	00-21	⑪		10-35	⑦		10-70			10-102			10-133	
○	00-22	⑪		10-36			10-71			10-102-1	⑦		10-134	⑤
				10-37			10-72			10-103	⑦		10-134-1	⑤
●	10-1	⑪		10-38			10-73			10-104			10-134-2	⑤
●	10-2	⑪		10-39			10-74			10-104-1	⑦		10-134-3	⑤
	10-3			10-40			10-75			10-104-2	⑦		10-134-4	⑤
	10-4			10-41			10-76	⑧		10-104-3	⑦		10-134-5	⑤
	10-5			10-42			10-77			10-105	⑦		10-134-6	⑤
	10-6			10-43			10-78	④		10-106			10-134-7	⑤
	10-7			10-44			10-79			10-107			10-134-8	⑤
	10-8			10-45			10-80			10-108			10-135	⑦
	10-9			10-46			10-81			10-108-1	⑦		10-136	⑦
	10-10			10-47			10-82			10-108-2			10-137	⑦
	10-11			10-48			10-83			10-108-3	⑦		10-138	
	10-12			10-49			10-84			10-108-4	⑦		10-139	
	10-13		○	10-50-1	⑪		10-85			10-108-5	⑦		10-140	⑤
	10-14		○	10-50-2	⑪		10-86			10-108-6	⑧		10-141	⑤

056103

Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number
	10-142			20-20-1	⑩	●	20-55	⑪		20-96-7	⑦		20-126	②
	10-143	⑦		20-20-2	⑩		20-56	②		20-96-8	⑦		20-127	②
	10-144	⑦		20-20-3	⑩		20-57	②		20-96-9	⑦		20-128	②
	10-145	⑦		20-20-4	⑩		20-58	②		20-97	②		20-128-1	⑦
	10-146	⑦		20-21	⑩		20-59	②		20-98	②		20-128-2	⑦
	10-147	⑦		20-22	①		20-60	②		20-99	②		20-129	⑦
	10-148	⑦		20-23	①		20-61	②		20-100	②		20-130	②
	10-149	⑦		20-24	⑦		20-62	②		20-101	②		20-131	②
	10-150	⑦		20-25	⑨		20-63	②		20-102	②		20-132	②
	10-151	⑦		20-25-1	⑨		20-64	②		20-103	②		20-133	②
	10-152	⑦		20-26	⑩		20-65	②		20-104	②		20-134	②
○	10-154	⑪		20-27	①		20-66	⑦		20-105	②		20-135	②
○	10-155	⑪		20-28	①		20-67	②		20-106	②		20-136	⑦
○	10-156	⑪		20-29	①		20-68	⑦		20-107	②		20-137	⑦
○	10-157	⑪		20-30	①		20-69	②		20-109	⑦		20-138	⑦
○	10-158	⑪		20-30-1	⑩		20-70	②		20-110	②		20-138-1	⑦
○	10-159	⑪		20-30-2	⑩		20-71	②		20-111	②		20-138-2	⑦
○	10-160	⑪		20-30-3	⑩		20-72	⑦		20-112	②		20-139	⑦
○	10-161	⑪		20-30-4	⑩		20-73	②		20-113	②		20-140	⑦
○	10-162	⑪		20-31	⑩		20-74	②		20-114	②		20-141	⑩
○	10-163	⑪		20-32	①		20-74-1	⑦		20-114-1	⑦		20-141-1	⑦
○	10-164	⑪		20-33	⑨		20-75	⑦		20-114-2	⑦		20-142	②
○	10-165	⑪		20-34	⑨		20-76	②		20-114-3	⑦		20-143	②
○	10-166	⑪		20-35	⑨		20-76-1	⑦		20-114-5	⑦		20-144	④
○	10-167	⑪		20-36	⑨		20-76-2	⑦		20-114-6	⑦		20-145	②
				20-37	①		20-77	⑦		20-114-7	⑩		20-146	④
●	20-1	⑪		20-38	①		20-78	②		20-114-8	⑩		20-147	④
	20-2	⑨		20-38-1	⑦		20-79	②		20-114-9	⑦		20-148	⑤
	20-3	⑨		20-38-2	⑨		20-80	②		20-114-10	⑦		20-149	⑤
	20-4	⑩		20-39	⑨		20-80-1	⑤		20-114-11	⑦		20-151	⑨
	20-5	⑨		20-40	⑨		20-80-2	⑦		20-114-12	⑦		20-152	⑨
	20-6	⑨		20-41	⑨		20-81	②		20-114-13	⑦		20-153	②
	20-7	⑨		20-42	⑨		20-82	⑦		20-114-14	⑦		20-154	②
	20-8	⑦		20-43	⑨		20-83	②		20-114-15	⑦		20-155	④
	20-8-1	⑦		20-44	⑨		20-84	②		20-114-16	⑩		20-156	⑦
	20-8-2	⑦		20-45	⑨		20-85	④		20-114-17	⑦		20-156-1	⑦
	20-8-3	⑦		20-46	⑨		20-86	④		20-114-18	⑦		20-156-2	⑦
	20-9	①		20-47	⑨		20-87	②		20-114-19	⑦		20-157	⑦
	20-10	⑦		20-48	⑨		20-88-1	⑦		20-114-20	⑦		20-158	⑦
	20-11	⑤		20-49	⑨		20-88-2	⑦		20-114-21	⑩		20-159	②
	20-12	⑩		20-50	⑨		20-89	⑦		20-114-22	⑦		20-160	②
	20-12-1	⑩		20-51	⑨		20-90	②		20-114-23	⑦		20-161	②
	20-13	⑦		20-52	⑨		20-91	②		20-114-24	⑦		20-162	②
	20-14	①		20-52-1	⑨		20-92	⑤		20-114-25	⑦		20-163	②
	20-15	⑨		20-52-2	⑩		20-93	②		20-115	②		20-164	②
	20-15-1	⑤		20-52-3	⑩		20-93-1	⑤		20-116	②		20-165	④
	20-15-2	⑦		20-52-4	⑩		20-94	⑦		20-117	②		20-166-1	⑤
	20-15-3	⑦		20-52-5	⑩		20-95	⑤		20-119	⑦		20-166-2	⑤
	20-15-4	⑦		20-52-6	⑩		20-96-1	⑦		20-121	⑦		20-166-4	⑤
	20-15-5	⑦		20-52-7	⑩		20-96-2	⑦		20-121-1	⑦		20-166-5	⑤
	20-17	⑦		20-52-8	⑩		20-96-3	⑦		20-122	②		20-166-6	⑤
	20-18	⑦		20-53	⑩		20-96-4	⑦		20-123	④		20-166-7	⑤
	20-19	⑨		20-54	⑩		20-96-5	⑦		20-124	④		20-166-8	⑤
	20-20	⑩		20-54-1	⑦		20-96-6	⑦		20-125	②		20-166-10	⑤

056103

056103

Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number
	20-166-11	⑤		20-204	②		20-236	②		30-50	③		30-100	③
	20-166-12	⑤		20-205	②		20-237	②		30-51	③		30-101	③
	20-166-13	⑧		20-206	②		20-238	②		30-52	③		30-102	⑨
	20-166-14	⑧		20-207	②		20-239	②		30-53	③		30-103	⑨
	20-166-16	⑤		20-208	⑦					30-54	③		30-104	⑨
	20-166-17	⑤		20-208-1	⑦		30-1	⑨		30-55	③		30-105	⑨
	20-166-18	⑤		20-208-2	⑦	●	30-2	⑪		30-56	③		30-106	⑨
	20-166-19	⑤		20-208-3	⑦		30-3	③		30-57	③		30-107	⑨
	20-166-20	⑤		20-209	②		30-4	③		30-58	③		30-108	③
	20-166-21	⑤		20-210	②		30-5	③		30-59	③		30-109	⑨
	20-166-22	⑤		20-211	②		30-6	③		30-60	③		30-110	⑨
	20-166-23	⑤		20-212	④		30-7	③		30-61	③		30-111	⑨
	20-166-24	⑤		20-213	⑦		30-8	⑩		30-62	③		30-111-1	⑧
	20-166-25	⑤		20-214	②		30-9	③		30-63	③		30-111-2	⑧
	20-167	⑦		20-215	②		30-10	③		30-64	③		30-111-3	⑧
	20-168	②		20-216	④		30-11	⑤		30-65	③		30-111-4	⑧
	20-169	②		20-216-1	⑦		30-12	⑧		30-66	③		30-111-5	⑧
	20-170	②		20-216-3	⑦		30-13	⑧		30-67	③		30-111-6	⑧
	20-171	②		20-216-4	⑦		30-14	③		30-68	③		30-111-7	⑨
	20-172	②		20-216-5	⑦		30-15	③		30-69	③		30-111-8	⑨
	20-173	②		20-216-6	⑦		30-16	③		30-70	③		30-111-9	⑨
	20-174	②		20-216-7	⑦		30-17	③		30-71	③		30-111-10	⑨
	20-175	⑦		20-216-8	⑦		30-18	③		30-72	③		30-111-11	⑨
	20-176	⑦		20-216-9	⑦		30-19	③		30-73	③		30-111-12	⑨
	20-176-1	⑦		20-216-10	⑦		30-20	③		30-74	③		30-111-13	⑨
	20-176-2	⑦		20-216-11	⑦		30-21	③		30-75	③		30-111-14	⑨
	20-176-3	⑦		20-216-12	⑦		30-22	③		30-76	③		30-111-15	⑧
	20-177	②		20-216-13	⑦		30-23	③		30-77	③		30-111-17	⑨
	20-178	⑦		20-216-14	⑦		30-24	③		30-78	⑩		30-111-18	⑨
	20-179	②		20-216-15	⑦		30-26	③		30-79	③		30-112	③
	20-180	②		20-216-16	⑦		30-27	③		30-80	③		30-113	③
	20-181	②		20-216-17	⑦		30-28	③		30-81	③		30-114	③
	20-182	②		20-216-18	⑦		30-29	③		30-82	③		30-115	③
	20-183	②		20-216-19	⑦		30-30	③		30-83	③		30-116	③
	20-184	②		20-216-20	⑦		30-32	③		30-84	③		30-117	③
	20-185	②		20-217	②		30-33	③		30-85	③		30-118	⑨
	20-186	②		20-218	②		30-34	⑨		30-86	③		30-119	③
	20-187	②		20-219	②		30-35	③		30-87	③		30-120	⑨
	20-188	②		20-220	②		30-36	⑨		30-88	③		30-121	③
	20-189	②		20-221	②		30-37	⑨		30-89	③		30-122	③
	20-190	②		20-222	②		30-37-1	⑨		30-90	③		30-123	③
	20-191	②		20-223	②		30-37-2	⑩		30-91	③		30-124	③
	20-192	②		20-224	②		30-38	③		30-92	③		30-125	③
	20-193	④		20-225	②		30-39	③		30-93	③		30-126	③
	20-194	⑦		20-226	②		30-40	③		30-94	③		30-127	③
	20-195	②		20-227	②		30-41	③		30-95	③		30-128	③
	20-196	⑥		20-228	②		30-42	③		30-95-1	⑨		30-129	③
	20-197	⑦		20-229	②		30-43	③		30-95-2	⑨		30-130	③
	20-198	②		20-230	②		30-44	③		30-95-3	⑨		30-131	③
	20-199	②		20-231	②		30-45	③		30-95-4	⑨		30-132	③
	20-200	②		20-232	②		30-46	③		30-96	⑧		30-133	③
	20-201	②		20-233	②		30-47	③		30-97	③		30-134	③
	20-202	②		20-234	②		30-48	③		30-98	⑧		30-135	③
	20-203	②		20-235	②		30-49	③		30-99	③		30-136	③

Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number
30-137		③	30-183		③	40-13			○	92-17	⑪	○	92-75	⑪
30-138		③	30-184		③	40-14			○	92-19	⑪	○	92-76	⑪
30-139		③	30-185		③	40-14-1		⑧	○	92-20	⑪	○	92-77	⑪
30-140		③	30-186		③	40-15			○	92-21	⑪	○	92-78	⑪
30-141		③	30-187		③	40-16			○	92-23	⑪	○	92-79	⑪
30-142		③	30-188		③	40-17			○	92-24	⑪	○	92-80	⑪
30-143		③	30-189		③	40-18			○	92-25	⑪	○	92-81	⑪
30-144		③	30-190		③	40-20			○	92-26	⑪	○	92-82	⑪
30-145		③	30-191		③	40-21			○	92-27	⑪	○	92-83	⑪
30-146		③	30-192		③	40-22		⑤	○	92-28	⑪	○	92-84	⑪
30-147		③	30-193		③	40-23			○	92-29	⑪	○	92-85	⑪
30-148		③	30-194		③	40-24			○	92-30	⑪	○	92-86	⑪
30-149		③	30-195		③	40-25			○	92-31	⑪	○	92-87	⑪
30-150		③	30-196		③	40-26			○	92-32	⑪	○	92-88	⑪
30-151		③	30-197		③	40-27			○	92-33	⑪	○	92-89	⑪
30-152		⑨	30-198		③	40-28			○	92-34	⑪	○	92-90	⑪
30-153		⑨	30-199		③	40-29			○	92-35	⑪	○	92-91	⑪
30-154		⑨	30-200		③	40-30			○	92-36	⑪	○	92-92	⑪
30-155		③	30-201		③	40-31		④	○	92-37	⑪	○	92-93	⑪
30-156		③	30-202		③				○	92-38	⑪	○	92-94	⑪
30-157		③	30-203		③	○ 90-1		⑪	○	92-39	⑪	○	92-95	⑪
30-157-1		⑤	30-204		③	○ 91-1		⑪	○	92-40	⑪	○	92-96	⑪
30-157-2		⑤	30-205		③	○ 91-1-1		⑪	○	92-41	⑪	○	92-97	⑪
30-157-3		⑤	30-206		③	○ 91-2		⑪	○	92-42	⑪	○	92-98	⑪
30-157-4		⑤	30-207		③	○ 91-3		⑪	○	92-43	⑪	○	92-99	⑪
30-157-5		⑤	30-208		③	○ 91-4		⑪	○	92-45	⑪	○	92-100	⑪
30-157-6		⑤	30-209		③	○ 91-5		⑪	○	92-46	⑪	○	92-101	⑪
30-158		③	30-210		③	○ 91-6		⑪	○	92-47	⑪	○	92-102	⑪
30-159		③	30-211		③	○ 91-7		⑪	○	92-48	⑪	○	92-103	⑪
30-160		⑩	30-212		③	○ 91-8		⑪	○	92-49	⑪	○	92-104	⑪
30-161		⑩	30-213		③	○ 91-9		⑪	○	92-50	⑪	○	92-105	⑪
30-162		⑩	30-214		③	○ 91-10		⑪	○	92-51	⑪	○	92-106	⑪
30-163		③	30-215		③	○ 91-11		⑪	○	92-52	⑪	○	92-107	⑪
30-163-1		⑩	30-216		③	○ 91-12		⑪	○	92-53	⑪	○	92-108	⑪
30-163-2		⑩	30-217		③	○ 91-13		⑪	○	92-54	⑪	○	92-109	⑪
30-164		③	30-218		③	○ 91-14		⑪	○	92-55	⑪	○	92-110	⑪
30-165		③	30-219		③	○ 91-15		⑪	○	92-56	⑪	○	92-111	⑪
30-166		③	30-220		③	○ 91-16		⑪	○	92-57	⑪	○	92-112	⑪
30-167		③	30-221		③				○	92-58	⑪	○	92-113	⑪
30-168		③	30-222		③	○ 92-1		⑪	○	92-59	⑪	○	92-114	⑪
30-169		③	30-223		③	○ 92-2		⑪	○	92-60	⑪	○	92-115	⑪
30-170		③				○ 92-3		⑪	○	92-61	⑪	○	92-116	⑪
30-171		③	● 40-1		⑪	○ 92-4		⑪	○	92-62	⑪	○	92-117	⑪
30-172		③	40-2			○ 92-5		⑪	○	92-63	⑪	○	92-118	⑪
30-173		③	40-3			○ 92-6		⑪	○	92-64	⑪	○	92-119	⑪
30-174		③	40-4			○ 92-7		⑪	○	92-65	⑪	○	92-120	⑪
30-175		③	40-5			○ 92-8		⑪	○	92-66	⑪	○	92-121	⑪
30-176		③	40-6			○ 92-9		⑪	○	92-67	⑪	○	92-122	⑪
30-177		③	40-7			○ 92-10		⑪	○	92-68	⑪	○	92-123	⑪
30-178		③	40-8			○ 92-11		⑪	○	92-70	⑪	○	92-124	⑪
30-179		③	40-9			○ 92-12		⑪	○	92-71	⑪	○	92-125	⑪
30-180		③	40-10			○ 92-13		⑪	○	92-72	⑪	○	92-126	⑪
30-181		③	40-11			○ 92-14		⑪	○	92-73	⑪	○	92-127	⑪
30-182		③	40-12			○ 92-16		⑪	○	92-74	⑪	○	92-128	⑪

056103

056103

Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number	Mark	Page	Revision number
<input type="radio"/>	92-129	⑪												
<input type="radio"/>	92-130	⑪												
<input type="radio"/>	92-131	⑪												
<input type="radio"/>	92-132	⑪												
<input type="radio"/>	92-133	⑪												
<input type="radio"/>	92-134	⑪												
<input type="radio"/>	92-135	⑪												
<input type="radio"/>	92-136	⑪												
<input type="radio"/>	92-137	⑪												
<input type="radio"/>	92-138	⑪												
<input type="radio"/>	92-139	⑪												
<input type="radio"/>	92-140	⑪												
<input type="radio"/>	92-141	⑪												
<input type="radio"/>	92-142	⑪												
<input type="radio"/>	92-143	⑪												
<input type="radio"/>	93-1	⑪												
<input type="radio"/>	93-1-1	⑪												
<input type="radio"/>	93-2	⑪												
<input type="radio"/>	94-1	⑪												
<input type="radio"/>	94-2	⑪												
<input type="radio"/>	94-3	⑪												
<input type="radio"/>	94-4	⑪												
<input type="radio"/>	94-5	⑪												
<input type="radio"/>	94-6	⑪												
<input type="radio"/>	94-7	⑪												
<input type="radio"/>	94-8	⑪												
<input type="radio"/>	94-9	⑪												

SAFETY

SAFETY NOTICE

IMPORTANT SAFETY NOTICE

Proper service and repair is extremely important for safe machine operation. The service and repair techniques recommended by Komatsu and described in this manual are both effective and safe. Some of these techniques require the use of tools specially designed by Komatsu for the specific purpose.

To prevent injury to workers, the symbol  is used to mark safety precautions in this manual. The cautions accompanying these symbols should always be followed carefully. If any dangerous situation arises or may possibly arise, first consider safety, and take the necessary actions to deal with the situation.

GENERAL PRECAUTIONS

Mistakes in operation are extremely dangerous. Read the Operation and Maintenance Manual carefully BEFORE operating the machine.

1. Before carrying out any greasing or repairs, read all the precautions given on the decals which are fixed to the machine.
2. When carrying out any operation, always wear safety shoes and helmet. Do not wear loose work clothes, or clothes with buttons missing.
 - Always wear safety glasses when hitting parts with a hammer.
 - Always wear safety glasses when grinding parts with a grinder, etc.
3. If welding repairs are needed, always have a trained, experienced welder carry out the work. When carrying out welding work, always wear welding gloves, apron, hand shield, cap and other clothes suited for welding work.
4. When carrying out any operation with two or more workers, always agree on the operating procedure before starting. Always inform your fellow workers before starting any step of the operation. Before starting work, hang UNDER REPAIR signs on the controls in the operator's compartment.
5. Keep all tools in good condition and learn the correct way to use them.

6. Decide a place in the repair workshop to keep tools and removed parts. Always keep the tools and parts in their correct places. Always keep the work area clean and make sure that there is no dirt or oil on the floor. Smoke only in the areas provided for smoking. Never smoke while working.

PREPARATIONS FOR WORK

7. Before adding oil or making any repairs, park the machine on hard, level ground, and block the wheels or tracks to prevent the machine from moving.
8. Before starting work, lower blade, ripper, bucket or any other work equipment to the ground. If this is not possible, insert the safety pin or use blocks to prevent the work equipment from falling. In addition, be sure to lock all the control levers and hang warning signs on them.
9. When disassembling or assembling, support the machine with blocks, jacks or stands before starting work.
10. Remove all mud and oil from the steps or other places used to get on and off the machine. Always use the handrails, ladders or steps when getting on or off the machine. Never jump on or off the machine. If it is impossible to use the handrails, ladders or steps, use a stand to provide safe footing.

PRECAUTIONS DURING WORK

11. When removing the oil filler cap, drain plug or hydraulic pressure measuring plugs, loosen them slowly to prevent the oil from spurting out.
Before disconnecting or removing components of the oil, water or air circuits, first remove the pressure completely from the circuit.
12. The water and oil in the circuits are hot when the engine is stopped, so be careful not to get burned.
Wait for the oil and water to cool before carrying out any work on the oil or water circuits.
13. Before starting work, remove the leads from the battery. Always remove the lead from the negative (-) terminal first.
14. When raising heavy components, use a hoist or crane.
Check that the wire rope, chains and hooks are free from damage.
Always use lifting equipment which has ample capacity.
Install the lifting equipment at the correct places. Use a hoist or crane and operate slowly to prevent the component from hitting any other part. Do not work with any part still raised by the hoist or crane.
15. When removing covers which are under internal pressure or under pressure from a spring, always leave two bolts in position on opposite sides. Slowly release the pressure, then slowly loosen the bolts to remove.
16. When removing components, be careful not to break or damage the wiring. Damaged wiring may cause electrical fires.
17. When removing piping, stop the fuel or oil from spilling out. If any fuel or oil drips onto the floor, wipe it up immediately. Fuel or oil on the floor can cause you to slip, or can even start fires.
18. As a general rule, do not use gasoline to wash parts. In particular, use only the minimum of gasoline when washing electrical parts.
19. Be sure to assemble all parts again in their original places.
Replace any damaged parts with new parts.
 - When installing hoses and wires, be sure that they will not be damaged by contact with other parts when the machine is being operated.
20. When installing high pressure hoses, make sure that they are not twisted. Damaged tubes are dangerous, so be extremely careful when installing tubes for high pressure circuits. Also, check that connecting parts are correctly installed.
21. When assembling or installing parts, always use the specified tightening torques. When installing protective parts such as guards, or parts which vibrate violently or rotate at high speed, be particularly careful to check that they are installed correctly.
22. When aligning two holes, never insert your fingers or hand. Be careful not to get your fingers caught in a hole.
23. When measuring hydraulic pressure, check that the measuring tool is correctly assembled before taking any measurements.
24. Take care when removing or installing the tracks of track-type machines.
When removing the track, the track separates suddenly, so never let anyone stand at either end of the track.

FOREWORD

GENERAL

This shop manual has been prepared as an aid to improve the quality of repairs by giving the serviceman an accurate understanding of the product and by showing him the correct way to perform repairs and make judgements. Make sure you understand the contents of this manual and use it to full effect at every opportunity.

This shop manual mainly contains the necessary technical information for operations performed in a service workshop. For ease of understanding, the manual is divided into the following chapters; these chapters are further divided into the each main group of components.

STRUCTURE AND FUNCTION

This section explains the structure and function of each component. It serves not only to give an understanding of the structure, but also serves as reference material for troubleshooting.

TESTING AND ADJUSTING

This section explains checks to be made before and after performing repairs, as well as adjustments to be made at completion of the checks and repairs.

Troubleshooting charts correlating "Problems" to "Causes" are also included in this section.

DISASSEMBLY AND ASSEMBLY

This section explains the order to be followed when removing, installing, disassembling or assembling each component, as well as precautions to be taken for these operations.

MAINTENANCE STANDARD

This section gives the judgement standards when inspecting disassembled parts.

NOTICE

The specifications contained in this shop manual are subject to change at any time and without any advance notice. Use the specifications given in the book with the latest date.

HOW TO READ THE SHOP MANUAL

VOLUMES

Shop manuals are issued as a guide to carrying out repairs. They are divided as follows:

- Chassis volume:** Issued for every machine model
- Engine volume:** Issued for each engine series
- Electrical volume:** } Each issued as one
- Attachments volume:** } volume to cover all models

These various volumes are designed to avoid duplicating the same information. Therefore, to deal with all repairs for any model, it is necessary that chassis, engine, electrical and attachment volumes be available.


DISTRIBUTION AND UPDATING

Any additions, amendments or other changes will be sent to KOMATSU distributors. Get the most up-to-date information before you start any work.


FILING METHOD

1. See the page number on the bottom of the page. File the pages in correct order.
2. Following examples show how to read the page number.


Example 1 (Chassis volume):

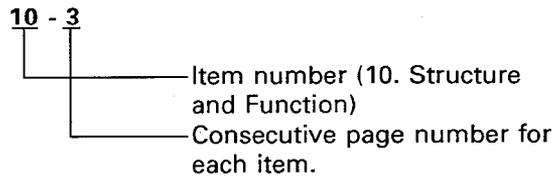

Example 2 (Engine volume):

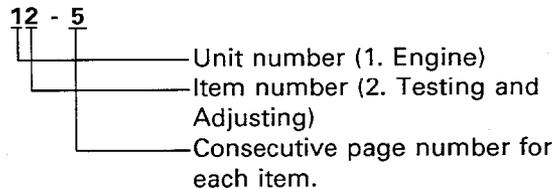

3. Additional pages: Additional pages are indicated by a hyphen (-) and number after the page number. File as in the example.



REVISED EDITION MARK

When a manual is revised, an edition mark (①②③....) is recorded on the bottom of the pages.

REVISIONS

Revised pages are shown in the LIST OF REVISED PAGES next to the CONTENTS page.

SYMBOLS

So that the shop manual can be of ample practical use, important safety and quality portions are marked with the following symbols.

Symbol	Item	Remarks
	Safety	Special safety precautions are necessary when performing the work.
	Caution	Special technical precautions or other precautions for preserving standards are necessary when performing the work.
	Weight	Weight of parts of systems. Caution necessary when selecting hoisting wire, or when working posture is important, etc.
	Tightening torque	Places that require special attention for the tightening torque during assembly.
	Coat	Places to be coated with adhesives and lubricants, etc.
	Oil, water	Places where oil, water or fuel must be added, and the capacity.
	Drain	Places where oil or water must be drained, and quantity to be drained.

HOISTING INSTRUCTIONS

HOISTING

Heavy parts (25 kg or more) must be lifted with a hoist, etc. In the **DISASSEMBLY AND ASSEMBLY** section, every part weighing 25 kg or more is indicated clearly with the symbol 

- If a part cannot be smoothly removed from the machine by hoisting, the following checks should be made:
 - 1) Check for removal of all bolts fastening the part to the relative parts.
 - 2) Check for existence of another part causing interference with the part to be removed.


WIRE ROPES

- 1) Use adequate ropes depending on the weight of parts to be hoisted, referring to the table below:

Wire ropes (Standard "Z" or "S" twist ropes without galvanizing)		
Rope diameter	Allowable load	
mm	kN	tons
10	9.8	1.0
11.2	13.7	1.4
12.5	15.7	1.6
14	21.6	2.2
16	27.5	2.8
18	35.3	3.6
20	43.1	4.4
22.4	54.9	5.6
30	98.1	10.0
40	176.5	18.0
50	274.6	28.0
60	392.2	40.0

- ★ The allowable load value is estimated to be one-sixth or one-seventh of the breaking strength of the rope used.
- 2) Sling wire ropes from the middle portion of the hook.

Slinging near the edge of the hook may cause the rope to slip off the hook during hoisting, and a serious accident can result. Hooks have maximum strength at the middle portion.

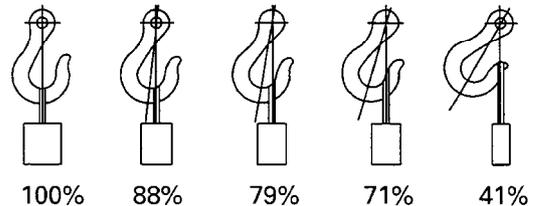


SAD00479

- 3) Do not sling a heavy load with one rope alone, but sling with two or more ropes symmetrically wound onto the load.

 Slinging with one rope may cause turning of the load during hoisting, untwisting of the rope, or slipping of the rope from its original winding position on the load, which can result in a dangerous accident.

- 4) Do not sling a heavy load with ropes forming a wide hanging angle from the hook. When hoisting a load with two or more ropes, the force subjected to each rope will increase with the hanging angles. The table below shows the variation of allowable load kN {kg} when hoisting is made with two ropes, each of which is allowed to sling up to 9.8 kN {1000 kg} vertically, at various hanging angles.

When two ropes sling a load vertically, up to 19.6 kN {2000 kg} of total weight can be suspended. This weight becomes 9.8 kN {1000 kg} when two ropes make a 120° hanging angle. On the other hand, two ropes are subjected to an excessive force as large as 39.2 kN {4000 kg} if they sling a 19.6 kN {2000 kg} load at a lifting angle of 150°.

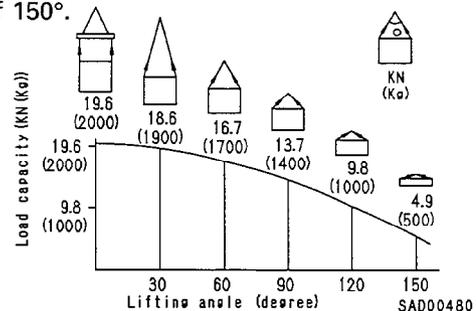

COATING MATERIALS

★ The recommended coating materials such as adhesives, gasket sealants and greases used for disassembly and assembly are listed below.

★ For coating materials not listed below, use the equivalent of products shown in this list.

Category	Komatsu code	Part No.	Q'ty	Container	Main applications, features
Adhesives	LT-1A	790-129-9030	150 g	Tube	<ul style="list-style-type: none"> Used to prevent rubber gaskets, rubber cushions, and cock plug from coming out.
	LT-1B	790-129-9050	20 g (2 pes.)	Polyethylene container	<ul style="list-style-type: none"> Used in places requiring an immediately effective, strong adhesive. Used for plastics (except polyethylene, polypropylene, tetrafluoroethylene and vinyl chloride), rubber, metal and non-metal.
	LT-2	09940-00030	50 g	Polyethylene container	<ul style="list-style-type: none"> Features: Resistance to heat and chemicals Used for anti-loosening and sealant purpose for bolts and plugs.
	LT-3	790-129-9060 (Set of adhesive and hardening agent)	Adhesive: 1 kg Hardening agent: 500 g	Can	<ul style="list-style-type: none"> Used as adhesive or sealant for metal, glass and plastic.
	LT-4	790-129-9040	250 g	Polyethylene container	<ul style="list-style-type: none"> Used as sealant for machined holes.
	Holtz MH 705	790-126-9120	75 g	Tube	<ul style="list-style-type: none"> Used as heat-resisting sealant for repairing engine.
	Three bond 1735	790-129-9140	50 g	Polyethylene container	<ul style="list-style-type: none"> Quick hardening type adhesive Cure time: within 5 sec. to 3 min. Used mainly for adhesion of metals, rubbers, plastics and woods.
	Aron-alpha 201	790-129-9130	2 g	Polyethylene container	<ul style="list-style-type: none"> Quick hardening type adhesive Quick cure type (max. strength after 30 minutes) Used mainly for adhesion of rubbers, plastics and metals.
	Loctite 648-50	79A-129-9110	50 cc	Polyethylene container	<ul style="list-style-type: none"> Features: Resistance to heat, chemicals Used at joint portions subject to high temperatures.
Gasket sealant	LG-1	790-129-9010	200 g	Tube	<ul style="list-style-type: none"> Used as adhesive or sealant for gaskets and packing of power train case, etc.
	LG-3	790-129-9070	1 kg	Can	<ul style="list-style-type: none"> Features: Resistance to heat Used as sealant for flange surfaces and bolts at high temperature locations, used to prevent seizure. Used as sealant for heat resistance gasket for high temperature locations such as engine precombustion chamber, exhaust pipe, etc.

Category	Komatsu code	Part No.	Q'ty	Container	Main applications, features
Gasket sealant	LG-4	790-129-9020	200 g	Tube	<ul style="list-style-type: none"> • Features: Resistance to water, oil • Used as sealant for flange surface, thread. • Also possible to use as sealant for flanges with large clearance. • Used as sealant for mating surfaces of final drive case, transmission case.
	LG-5	790-129-9080	1 kg	Polyethylene container	<ul style="list-style-type: none"> • Used as sealant for various threads, pipe joints, flanges. • Used as sealant for tapered plugs, elbows, nipples of hydraulic piping.
	LG-6	09940-00011	250 g	Tube	<ul style="list-style-type: none"> • Features: Silicon based, resistance to heat, cold • Used as sealant for flange surface, tread. • Used as sealant for oil pan, final drive case, etc.
	LG-7	09920-00150	150 g	Tube	<ul style="list-style-type: none"> • Features: Silicon based, quick hardening type • Used as sealant for flywheel housing, intake manifold, oil an, thermostat housing, etc.
	Three bond 1211	790-129-9090	100 g	Tube	<ul style="list-style-type: none"> • Used as heat-resisting sealant for repairing engine.
Molybdenum disulphide lubricant	LM-G	09940-00051	60 g	Can	<ul style="list-style-type: none"> • Used as lubricant for sliding portion (to prevent from squeaking).
	LM-P	09940-00040	200 g	Tube	<ul style="list-style-type: none"> • Used to prevent seizure or scuffing of the thread when press fitting or shrink fitting. • Used as lubricant for linkage, bearings, etc.
Grease	G2-LI	SYG2-400LI SYG2-350LI SYG2-400LI-A SYG2-160LI SYGA-160CNLI	Various	Various	<ul style="list-style-type: none"> • General purpose type
	G2-CA	SYG2-400CA SYG2-350CA SYG2-400CA-A SYG2-160CA SYGA-160CNCA	Various	Various	<ul style="list-style-type: none"> • Used for normal temperature, light load bearing at places in contact with water or steam.
	Molybdenum disulphide lubricant	SYG2-400M	400 g (10 per case)	Belows type	<ul style="list-style-type: none"> • Used for places with heavy load

STANDARD TIGHTENING TORQUE

STANDARD TIGHTENING TORQUES OF BOLTS AND NUTS

Use these torques for metric bolts and nuts. (Always use torque wrench).

Thread diameter of bolt	Width across flats				
		Nm		kgm	
6	10	13.2 ± 1.4		1.35 ± 0.15	
8	13	31 ± 3		3.2 ± 0.3	
10	17	66 ± 7		6.7 ± 0.7	
12	19	113 ± 10		11.5 ± 1	
14	22	177 ± 19		18 ± 2	
16	24	279 ± 30		28.5 ± 3	
18	27	382 ± 39		39 ± 4	
20	30	549 ± 59		56 ± 6	
22	32	745 ± 83		76 ± 8.5	
24	36	927 ± 103		94.5 ± 10.5	
27	41	1320 ± 140		135 ± 15	
30	46	1720 ± 190		175 ± 20	
33	50	2210 ± 240		225 ± 25	
36	55	2750 ± 290		280 ± 30	
39	60	3290 ± 340		335 ± 35	

Thread diameter of bolt	Width across flats		
		Nm	
6	10	7.85 ± 1.95	
8	13	18.6 ± 4.9	
10	14	40.2 ± 5.9	
12	27	82.35 ± 7.85	

TIGHTENING TORQUE OF HOSE NUTS

Use these torques for hose nuts.

Nominal No.	Thread diameter	Width across flat	Tightening torque	
	mm	mm	Nm	kgm
02	14	19	24.5 ± 4.9	2.5 ± 0.5
03	18	24	49 ± 19.6	5 ± 2
04	22	27	78.5 ± 19.6	8 ± 2
05	24	32	137.3 ± 29.4	14 ± 3
06	30	36	176.5 ± 29.4	18 ± 3
10	33	41	196.1 ± 49	20 ± 5
12	36	46	245.2 ± 49	25 ± 5
14	42	55	294.2 ± 49	30 ± 5

TIGHTENING TORQUE OF SPLIT FLANGE BOLTS

Use these torques for split flange bolts.

Thread diameter	Width across flat	Tightening torque	
		Nm	kgm
10	14	65.7 ± 6.8	6.7 ± 0.7
12	17	112 ± 9.8	11.5 ± 1
16	22	279 ± 29	28.5 ± 3

TIGHTENING TORQUE OF O-RING BOSS CONNECTOR


Use these torques for O-ring boss connector

Nominal No.	Thread diameter	Width across flat	Tightening torque	
	mm	mm	Nm	kgm
02	14	Varies depending on type of connector.	34.3±4.9	3.5±0.5
03, 04	20		93.1±9.8	9.5±1
05, 06	24		142.1±19.6	14.5±2
10, 12	33		421.4±58.8	43±6
14	42		877.1±132.3	89.5±13.5

TIGHTENING TORQUE OF O-RING BOSS CONNECTOR

Use these torques for O-ring boss connector

Nominal No.	Thread diameter	Width across flat	Tightening torque	
	mm	mm	Nm	kgm
08	8	14	7.35±1.47	0.75±0.15
10	10	17	11.27±1.47	1.15±0.15
12	12	19	17.64±1.96	1.8±0.2
14	14	22	22.54±1.96	2.3±0.2
16	16	24	29.4±4.9	3±0.5
18	18	27	39.2±4.9	4±0.5
20	20	30	49±4.9	5±0.5
24	24	32	68.6±9.8	7±1
30	30	32	107.8±14.7	11±1.5
33	33	—	127.4±19.6	13±2
36	36	36	151.9±24.5	15.5±2.5
42	42	—	210.7±29.4	21.5±3
52	52	—	323.4±44.1	33±4.5

**TIGHTENING TORQUES OF FLARE NUT**

Use these torques for O-ring boss connector

SAD00483

Thread diameter	Width across flat	Tightening torque	
		Nm	kgm
14	19	24.5±4.9	2.5±0.5
18	24	49±19.6	5±2
22	27	78.5±19.6	8±2
24	32	137.3±29.4	14±3
30	36	176.5±29.4	18±3
33	41	196.1±49	20±5
36	46	245.2±49	25±5
42	55	294.2±49	30±5

TIGHTENING TORQUE FOR 102 ENGINE SERIES (BOLT AND NUTS)

Use these torques for bolts and nuts (unit: mm) of Cummins Engine.

Thread diameter	Tightening torque	
mm	Nm	kgm
6	10 ± 2	1.02 ± 0.20
8	24 ± 4	2.45 ± 0.41
10	43 ± 6	4.38 ± 0.61
12	77 ± 12	7.85 ± 1.22

TIGHTENING TORQUE FOR 102 ENGINE SERIES (EYE JOINTS)

Use these torques for eye joints (unit: mm) of Cummins Engine.

Thread diameter	Tightening torque	
mm	Nm	kgm
6	8 ± 2	0.81 ± 0.20
8	10 ± 2	1.02 ± 0.20
10	12 ± 2	1.22 ± 0.20
12	24 ± 4	2.45 ± 0.41
14	36 ± 5	3.67 ± 0.51

TIGHTENING TORQUE FOR 102 ENGINE SERIES (TAPERED SCREWS)

Use these torques for tapered screws (unit: inch) of Cummins Engine.

Thread diameter	Tightening torque	
inch	Nm	kgm
1 / 16	3 ± 1	0.31 ± 0.10
1 / 8	8 ± 2	0.81 ± 0.20
1 / 4	12 ± 2	1.22 ± 0.20
3 / 8	15 ± 2	1.53 ± 0.41
1 / 2	24 ± 4	2.45 ± 0.41
3 / 4	36 ± 5	3.67 ± 0.51
1	60 ± 9	6.12 ± 0.92

ELECTRIC WIRE CODE

In the wiring diagrams, various colors and symbols are employed to indicate the thickness of wires. This wire code table will help you understand WIRING DIAGRAMS.

Example: 5WB indicates a cable having a nominal number 5 and white coating with black stripe.

CLASSIFICATION BY THICKNESS

Nominal number	Copper wire			Cable O.D. (mm)	Current rating (A)	Applicable circuit
	Number of strands	Dia. of strands (mm)	Cross section (mm ²)			
0.85	11	0.32	0.88	2.4	12	Starting, lighting, signal etc.
2	26	0.32	2.09	3.1	20	Lighting, signal etc.
5	65	0.32	5.23	4.6	37	Charging and signal
15	84	0.45	13.36	7.0	59	Starting (Glow plug)
40	85	0.80	42.73	11.4	135	Starting
60	127	0.80	63.84	13.6	178	Starting
100	217	0.80	109.1	17.6	230	Starting

CLASSIFICATION BY COLOR AND CODE

Priority	Circuits		Charging	Ground	Starting	Lighting	Instrument	Signal	Other
	Classification								
1	Primary	Code	W	B	B	R	Y	G	L
		Color	White	Black	Black	Red	Yellow	Green	Blue
2	Auxiliary	Code	WR	—	BW	RW	YR	GW	LW
		Color	White & Red	—	Black & White	Red & White	Yellow & Red	Green & White	Blue & White
3		Code	WB	—	BY	RB	YB	GR	LR
		Color	White & Black	—	Black & Yellow	Red & Black	Yellow & Black	Green & Red	Blue & Red
4		Code	WL	—	BR	RY	YG	GY	LY
		Color	White & Blue	—	Black & Red	Red & Yellow	Yellow & Green	Green & Yellow	Blue & Yellow
5		Code	WG	—	—	RG	YL	GB	LB
		Color	White & Green	—	—	Red & Green	Yellow & Blue	Green & Black	Blue & Black
6		Code	—	—	—	RL	YW	GL	—
		Color	—	—	—	Red & Blue	Yellow & White	Green & Blue	—

CONVERSION TABLE

METHOD OF USING THE CONVERSION TABLE

The Conversion Table in this section is provided to enable simple conversion of figures. For details of the method of using the Conversion Table, see the example given below.

EXAMPLE

- Method of using the Conversion Table to convert from millimeters to inches
1. Convert 55 mm into inches.
 - (1) Locate the number 50 in the vertical column at the left side, take this as **Ⓐ**, then draw a horizontal line from **Ⓐ**.
 - (2) Locate the number 5 in the row across the top, take this as **Ⓑ**, then draw a perpendicular line down from **Ⓑ**.
 - (3) Take the point where the two lines cross as **Ⓒ**. This point **Ⓒ** gives the value when converting from millimeters to inches. Therefore, 55 mm = 2.165 inches.
 2. Convert 550 mm into inches.
 - (1) The number 550 does not appear in the table, so divide by 10 (move the decimal point one place to the left) to convert it to 55 mm.
 - (2) Carry out the same procedure as above to convert 55 mm to 2.165 inches.
 - (3) The original value (550 mm) was divided by 10, so multiply 2.165 inches by 10 (move the decimal point one place to the right) to return to the original value. This gives 550 mm = 21.65 inches.

Ⓑ

1 mm = 0.03937 in

Millimeters to inches		0	1	2	3	4	5	6	7	8	9
	0	0	0.039	0.079	0.118	0.157	0.197	0.236	0.276	0.315	0.354
	10	0.394	0.433	0.472	0.512	0.551	0.591	0.630	0.669	0.709	0.748
	20	0.787	0.827	0.866	0.906	0.945	0.984	1.024	1.063	1.102	1.142
	30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.536
	40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
	50	1.969	2.008	2.047	2.087	2.126	2.165	2.205	2.244	2.283	2.323
Ⓐ	60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.717
	70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.032	3.071	3.110
	80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
	90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

Ⓒ

Millimeters to Inches

1 mm = 0.03937 in

	0	1	2	3	4	5	6	7	8	9
0	0	0.039	0.079	0.118	0.157	0.197	0.236	0.276	0.315	0.354
10	0.394	0.433	0.472	0.512	0.551	0.591	0.630	0.669	0.709	0.748
20	0.787	0.827	0.866	0.906	0.945	0.984	1.024	1.063	1.102	1.142
30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.536
40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
50	1.969	2.008	2.047	2.087	2.126	2.165	2.205	2.244	2.283	2.323
60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.717
70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.032	3.071	3.110
80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

Kilogram to Pound

1 kg = 2.2046 lb

	0	1	2	3	4	5	6	7	8	9
0	0	2.20	4.41	6.61	8.82	11.02	13.23	15.43	17.64	19.84
10	22.05	24.25	26.46	28.66	30.86	33.07	35.27	37.48	39.68	41.89
20	44.09	46.30	48.50	50.71	51.91	55.12	57.32	59.53	61.73	63.93
30	66.14	68.34	70.55	72.75	74.96	77.16	79.37	81.57	83.78	85.98
40	88.18	90.39	92.59	94.80	97.00	99.21	101.41	103.62	105.82	108.03
50	110.23	112.44	114.64	116.85	119.05	121.25	123.46	125.66	127.87	130.07
60	132.28	134.48	136.69	138.89	141.10	143.30	145.51	147.71	149.91	152.12
70	154.32	156.53	158.73	160.94	163.14	165.35	167.55	169.76	171.96	174.17
80	176.37	178.57	180.78	182.98	185.19	187.39	189.60	191.80	194.01	196.21
90	198.42	200.62	202.83	205.03	207.24	209.44	211.64	213.85	216.05	218.26

Liter to U.S. Gallon

1ℓ = 0.2642 U.S. Gal

	0	1	2	3	4	5	6	7	8	9
0	0	0.264	0.528	0.793	1.057	1.321	1.585	1.849	2.113	2.378
10	2.642	2.906	3.170	3.434	3.698	3.963	4.227	4.491	4.755	5.019
20	5.283	5.548	5.812	6.076	6.340	6.604	6.869	7.133	7.397	7.661
30	7.925	8.189	8.454	8.718	8.982	9.246	9.510	9.774	10.039	10.303
40	10.567	10.831	11.095	11.359	11.624	11.888	12.152	12.416	12.680	12.944
50	13.209	13.473	13.737	14.001	14.265	14.529	14.795	15.058	15.322	15.586
60	15.850	16.115	16.379	16.643	16.907	17.171	17.435	17.700	17.964	18.228
70	18.492	18.756	19.020	19.285	19.549	19.813	20.077	20.341	20.605	20.870
80	21.134	21.398	21.662	21.926	22.190	22.455	22.719	22.983	23.247	23.511
90	23.775	24.040	24.304	24.568	24.832	25.096	25.361	25.625	25.889	26.153

Liter to U.K. Gallon

1ℓ = 0.21997 U.K. Gal

	0	1	2	3	4	5	6	7	8	9
0	0	0.220	0.440	0.660	0.880	1.100	1.320	1.540	1.760	1.980
10	2.200	2.420	2.640	2.860	3.080	3.300	3.520	3.740	3.950	4.179
20	4.399	4.619	4.839	5.059	5.279	5.499	5.719	5.939	6.159	6.379
30	6.599	6.819	7.039	7.259	7.479	7.699	7.919	8.139	8.359	8.579
40	8.799	9.019	9.239	9.459	9.679	9.899	10.119	10.339	10.559	10.778
50	10.998	11.281	11.438	11.658	11.878	12.098	12.318	12.528	12.758	12.978
60	13.198	13.418	13.638	13.858	14.078	14.298	14.518	14.738	14.958	15.178
70	15.398	15.618	15.838	16.058	16.278	16.498	16.718	16.938	17.158	17.378
80	17.598	17.818	18.037	18.257	18.477	18.697	18.917	19.137	19.357	19.577
90	19.797	20.017	20.237	20.457	20.677	20.897	21.117	21.337	21.557	21.777

kgm to ft. lb

1 kgm = 7.233 ft. lb

	0	1	2	3	4	5	6	7	8	9
0	0	7.2	14.5	21.7	28.9	36.2	43.4	50.6	57.9	65.1
10	72.3	79.6	86.8	94.0	101.3	108.5	115.7	123.0	130.2	137.4
20	144.7	151.9	159.1	166.4	173.6	180.8	188.1	195.3	202.5	209.8
30	217.0	224.2	231.5	238.7	245.9	253.2	260.4	267.6	274.9	282.1
40	289.3	296.6	303.8	311.0	318.3	325.5	332.7	340.0	347.2	354.4
50	361.7	368.9	376.1	383.4	390.6	397.8	405.1	412.3	419.5	426.8
60	434.0	441.2	448.5	455.7	462.9	470.2	477.4	484.6	491.8	499.1
70	506.3	513.5	520.8	528.0	535.2	542.5	549.7	556.9	564.2	571.4
80	578.6	585.9	593.1	600.3	607.6	614.8	622.0	629.3	636.5	643.7
90	651.0	658.2	665.4	672.7	679.9	687.1	694.4	701.6	708.8	716.1
100	723.3	730.5	737.8	745.0	752.2	759.5	766.7	773.9	781.2	788.4
110	795.6	802.9	810.1	817.3	824.6	831.8	839.0	846.3	853.5	860.7
120	868.0	875.2	882.4	889.7	896.9	904.1	911.4	918.6	925.8	933.1
130	940.3	947.5	954.8	962.0	969.2	976.5	983.7	990.9	998.2	1005.4
140	1012.6	1019.9	1027.1	1034.3	1041.5	1048.8	1056.0	1063.2	1070.5	1077.7
150	1084.9	1092.2	1099.4	1106.6	1113.9	1121.1	1128.3	1135.6	1142.8	1150.0
160	1157.3	1164.5	1171.7	1179.0	1186.2	1193.4	1200.7	1207.9	1215.1	1222.4
170	1129.6	1236.8	1244.1	1251.3	1258.5	1265.8	1273.0	1280.1	1287.5	1294.7
180	1301.9	1309.2	1316.4	1323.6	1330.9	1338.1	1345.3	1352.6	1359.8	1367.0
190	1374.3	1381.5	1388.7	1396.0	1403.2	1410.4	1417.7	1424.9	1432.1	1439.4

kg/cm² to lb/in²

1kg/cm² = 14.2233 lb/in²

	0	1	2	3	4	5	6	7	8	9
0	0	14.2	28.4	42.7	56.9	71.1	85.3	99.6	113.8	128.0
10	142.2	156.5	170.7	184.9	199.1	213.4	227.6	241.8	256.0	270.2
20	284.5	298.7	312.9	327.1	341.4	355.6	369.8	384.0	398.3	412.5
30	426.7	440.9	455.1	469.4	483.6	497.8	512.0	526.3	540.5	554.7
40	568.9	583.2	597.4	611.6	625.8	640.1	654.3	668.5	682.7	696.9
50	711.2	725.4	739.6	753.8	768.1	782.3	796.5	810.7	825.0	839.2
60	853.4	867.6	881.8	896.1	910.3	924.5	938.7	953.0	967.2	981.4
70	995.6	1010	1024	1038	1053	1067	1081	1095	1109	1124
80	1138	1152	1166	1181	1195	1209	1223	1237	1252	1266
90	1280	1294	1309	1323	1337	1351	1365	1380	1394	1408
100	1422	1437	1451	1465	1479	1493	1508	1522	1536	1550
110	1565	1579	1593	1607	1621	1636	1650	1664	1678	1693
120	1707	1721	1735	1749	1764	1778	1792	1806	1821	1835
130	1849	1863	1877	1892	1906	1920	1934	1949	1963	1977
140	1991	2005	2020	2034	2048	2062	2077	2091	2105	2119
150	2134	2148	2162	2176	2190	2205	2219	2233	2247	2262
160	2276	2290	2304	2318	2333	2347	2361	2375	2389	2404
170	2418	2432	2446	2460	2475	2489	2503	2518	2532	2546
180	2560	2574	2589	2603	2617	2631	2646	2660	2674	2688
190	2702	2717	2731	2745	2759	2773	2788	2802	2816	2830
200	2845	2859	2873	2887	2901	2916	2930	2944	2958	2973
210	2987	3001	3015	3030	3044	3058	3072	3086	3101	3115
220	3129	3143	3158	3172	3186	3200	3214	3229	3243	3257
230	3271	3286	3300	3314	3328	3343	3357	3371	3385	3399
240	3414	3428	3442	3456	3470	3485	3499	3513	3527	3542

Temperature

Fahrenheit-Centigrade Conversion ; a simple way to convert a Fahrenheit temperature reading into a Centigrade temperature reading or vice versa is to enter the accompanying table in the center or boldface column of figures.

These figures refer to the temperature in either Fahrenheit or Centigrade degrees.

If it is desired to convert from Fahrenheit to Centigrade degrees, consider the center column as a table of Fahrenheit temperatures and read the corresponding Centigrade temperature in the column at the left.

If it is desired to convert from Centigrade to Fahrenheit degrees, consider the center column as a table of Centigrade values, and read the corresponding Fahrenheit temperature on the right.

$$1^{\circ}\text{C} = 33.8^{\circ}\text{F}$$

°C		°F	°C		°F	°C		°F	°C		°F
-40.4	-40	-40.0	-11.7	11	51.8	7.8	46	114.8	27.2	81	117.8
-37.2	-35	-31.0	-11.1	12	53.6	8.3	47	116.6	27.8	82	179.6
-34.4	-30	-22.0	-10.6	13	55.4	8.9	48	118.4	28.3	83	181.4
-31.7	-25	-13.0	-10.0	14	57.2	9.4	49	120.2	28.9	84	183.2
-28.9	-20	-4.0	-9.4	15	59.0	10.0	50	122.0	29.4	85	185.0
-28.3	-19	-2.2	-8.9	16	60.8	10.6	51	123.8	30.0	86	186.8
-27.8	-18	-0.4	-8.3	17	62.6	11.1	52	125.6	30.6	87	188.6
-27.2	-17	1.4	-7.8	18	64.4	11.7	53	127.4	31.1	88	190.4
-26.7	-16	3.2	-7.2	19	66.2	12.2	54	129.2	31.7	89	192.2
-26.1	-15	5.0	-6.7	20	68.0	12.8	55	131.0	32.2	90	194.0
-25.6	-14	6.8	-6.1	21	69.8	13.3	56	132.8	32.8	91	195.8
-25.0	-13	8.6	-5.6	22	71.6	13.9	57	134.6	33.3	92	197.6
-24.4	-12	10.4	-5.0	23	73.4	14.4	58	136.4	33.9	93	199.4
-23.9	-11	12.2	-4.4	24	75.2	15.0	59	138.2	34.4	94	201.2
-23.3	-10	14.0	-3.9	25	77.0	15.6	60	140.0	35.0	95	203.0
-22.8	-9	15.8	-3.3	26	78.8	16.1	61	141.8	35.6	96	204.8
-22.2	-8	17.6	-2.8	27	80.6	16.7	62	143.6	36.1	97	206.6
-21.7	-7	19.4	-2.2	28	82.4	17.2	63	145.4	36.7	98	208.4
-21.1	-6	21.2	-1.7	29	84.2	17.8	64	147.2	37.2	99	210.2
-20.6	-5	23.0	-1.1	30	86.0	18.3	65	149.0	37.8	100	212.0
-20.0	-4	24.8	-0.6	31	87.8	18.9	66	150.8	40.6	105	221.0
-19.4	-3	26.6	0	32	89.6	19.4	67	152.6	43.3	110	230.0
-18.9	-2	28.4	0.6	33	91.4	20.0	68	154.4	46.1	115	239.0
-18.3	-1	30.2	1.1	34	93.2	20.6	69	156.2	48.9	120	248.0
-17.8	0	32.0	1.7	35	95.0	21.1	70	158.0	51.7	125	257.0
-17.2	1	33.8	2.2	36	96.8	21.7	71	159.8	54.4	130	266.0
-16.7	2	35.6	2.8	37	98.6	22.2	72	161.6	57.2	135	275.0
-16.1	3	37.4	3.3	38	100.4	22.8	73	163.4	60.0	140	284.0
-15.6	4	39.2	3.9	39	102.2	23.3	74	165.2	62.7	145	293.0
-15.0	5	41.0	4.4	40	104.0	23.9	75	167.0	65.6	150	302.0
-14.4	6	42.8	5.0	41	105.8	24.4	76	168.8	68.3	155	311.0
-13.9	7	44.6	5.6	42	107.6	25.0	77	170.6	71.1	160	320.0
-13.3	8	46.4	6.1	43	109.4	25.6	78	172.4	73.9	165	329.0
-12.8	9	48.2	6.7	44	111.2	26.1	79	174.2	76.7	170	338.0
-12.2	10	50.0	7.2	45	113.0	26.7	80	176.0	79.4	175	347.0

WEIGHT TABLE

 This weight table is a guide for use when transporting or handling component.

Unit : kg

Model	HD785-3	HD985-3
Applicable serial No.	2001 and up	1001 and up
Engine assembly	3,100	3,100
Output shaft assembly	170	170
Radiator assembly	410	410
Fuel tank	500	515
Torque converter	580	580
Transmission assembly	1,380	1,455
Drive shaft assembly (front)	50	50
Drive shaft assembly (rear)	120	120
Rear axle assembly	9,350	10,030
• Differential	1,225	1,225
• Final drive (one-side)	1,980	2,185
• Rear brake (one-side)	610	610
• Parking brake (single)	95	95
• Parking brake (double)	150	150
Front axle assembly	1,575	1,605
• Front axle	890	920
• Front brake	190	190
Frame	8,285	8,285
Front suspension cylinder	680	680
Rear suspension cylinder	240	230
Operator's seat	37	37
Steering cylinder	75	75
Hoist cylinder	330	330
Demand valve	70	70
Steering valve	25	25
Hoist valve	55	55
Hydraulic pump		
(SAR(4)-285+285)	55	55
(SAR(4)-180+180)	45	45
Dump body	14,900	16,250

056103

TABLE OF COOLANT QUANTITIES

PROPER SELECTION OF FUEL, COOLANT AND LUBRICANTS

RESERVOIR	KIND OF FLUID	AMBIENT TEMPERATURE					CAPACITY (ℓ)	
		14 -10	32 0	50 10	68 20	86°F 30°C	Specified	Refill
Engine oil pan	Engine oil	SAE 30					98	90
		SAE 10W						
		SAE 15W-40						
		SAE 10W-30						
Transmission case (incl. torque converter)		SAE 30					130	105
		SAE 10W						
Front brake oil tank Hydraulic tank Steering hoist oil tank Rear brake cooling oil tank							2	2
		SAE 10W					255 378	162 268
							19.3 (each) 18.2 (each)	— —
Differential case Final drive case		SAE 30					130 64 (each)	130 64 (each)
Fuel tank	Diesel fuel	ASTM D975 No.2					1,240	—
		*						
Cooling system	Water	Add antifreeze				230	—	

* ASTM D975 No. 1

ASTM: American Society of Testing and Material
SAE: Society of Automotive Engineers

Specified capacity: Total amount of oil including oil for components and oil in piping.
Refill capacity: Amount of oil needed to refill system during normal inspection and maintenance.

NOTE:

(1) When fuel sulphur content is less than 0.5%, change oil in the oil pan every periodic maintenance hours described in this manual. Change oil according to the following table if fuel sulphur content is above 0.5%.

Fuel sulphur content	Change interval of oil in engine oil pan
0.5 to 1.0%	1/2 of regular interval
Above 1.0%	1/4 of regular interval

- (2) When starting the engine in an atmospheric temperature of lower than 0°C, be sure to use engine oil of SAE10W, SAE10W-30 and SAE15W-40, even though an atmospheric temperature goes up to 10°C more or less in the day time.
- (3) Use API classification CD as engine oil and if API classification CC, reduce the engine oil change interval to half.

056103

10 STRUCTURE AND FUNCTION

056103


Radiator, torque converter oil cooler	10- 3	Suspension system	10-42
Brake oil cooler	10- 4	Suspension cylinder	10-44
Power train skeleton	10- 5	Front suspension cylinder	10-44
Output shaft	10- 6	Rear suspension cylinder (HD785-3)	10-48
Torque converter and transmission hydraulic piping	10- 7	Rear suspension cylinder (HD985-3)	91-12
Torque converter and transmission hydraulic circuit diagram	10- 8	Air circuit diagram	10-51
Torque converter and transmission hydraulic circuit schematics	10- 9	Air piping	10-52-1
Hydraulic pump (SAR4-160)	10-10	Air governor	10-53
Torque converter (HD785-3)	10-12	Safety valve	10-55
Torque converter (HD985-3)	91- 2	Check valve	10-55
Torque converter valve	10-14	Double-check valve	10-56
Lockup solenoid valve	10-19	Auto drain valve	10-57
Transmission (HD785-3)	10-20	Hand brake valve (Retarder control valve)	10-58
Transmission (HD985-3)	91- 4	Brake valve	10-60
Transmission valve	10-22	2-way control valve (Parking brake valve, emergency brake valve)	10-63
ECMV (Electronic control Modulation Valve)	10-23	Emergency brake control valve (Variable control type)	10-64-1
Lubrication relief valve	10-28	Parking brake pilot valve	10-65
Front axle (HD785-3)	10-29	Relay valve (Acts also as emergency relay)	10-66
Front axle (HD985-3)	91- 6	Parking brake relay valve	10-69
Rear axle (HD785-3)	10-30	Quick-release valve	10-71
Rear axle (HD985-3)	91- 7	Brake chamber	10-72
Differential	10-31	Parking brake chamber	10-74
Differential lock control	10-31-2	Slack adjuster	10-75
Structure of system	10-31-2	Hydraulic piping (Steering and hoist, and brake cooling) ...	10-77
Differential lock system diagram	10-31-3	Hydraulic circuit diagram (Steering and hoist, and brake cooling) ...	10-78
Switch	10-31-3	Dump body control	10-79
Differential lock solenoid valve	10-31-4	Hydraulic tank and brake cooling oil tank	10-80
Final drive (HD785-3)	10-32	Hydraulic pump	10-81
Final drive (HD985-3)	91- 8	Brake cooling oil control valve (BCV)	10-82
Front brake	10-33	Steering valve	10-83
Rear brake	10-34	Crossover relief valve	10-87
Parking brake	10-34-2	Demand valve	10-88
Wheels (HD785-3)	10-36	Hoist valve	10-92
Wheels (HD985-3)	91- 8	Steering cylinder	10-94
Axle support (HD785-3)	10-37	Hoist cylinder	10-94
Axle support (HD985-3)	91-10	Dump body(HD785-3)	10-95
Steering system (HD785-3)	10-38	Dump body(HD985-3)	91-14
Steering system (HD985-3)	91-11		
Steering wheel	10-39		
Steering linkage	10-40		

Main fram (HD785-3)	10-95	Automatic emergency steering system (HD785-3)	10-124
Main fram (HD985-3)	91-14	Automatic emergency steering system (HD985-3)	91- 21
Electrical circuit diagram	10-96-2	Electrical circuit diagram	10-125
Pressure switch	10-101	Flow switch	10-126
Stop lamp swich	10-101	Relay timer	10-128
Horn valve	10-102	Automatic suspension system	10-129
Parking brake switch	10-102	Automatic suspension mode selection control	10-131
Front brake cut-off valve	10-102-1	Suspension controller	10-132
Automatic retarder valve	10-103	Sensors, switches	10-133
Exhaust brake valve	10-103	Steering angle sensor	10-133
Tilt switch	10-104	Pressure sensor	10-133
Air conditioner	10-104-1	Payload meter	10-134
Piping diagram	10-104-1	Structure of system	10-134
Electrical circuit diagram	10-104-2	Electrical circuit diagram	10-134-1
Refrigerant circuit diagram	10-104-2	Principle of calculation	10-134-2
Condenser	10-104-3	Features of equipment	10-134-4
Compressor	10-104-3	Electronic monitor system	10-135
Engine control system (Mechanical governor type)	10-105	Electronic monitor panel	10-136
Electrical circuit diagram	10-106	Electronic monitor displays, functions	10-137
Hydraulic circuit diagram	10-106	Sensors, switches	10-140
Servo cylinder	10-107	Engine speed sensor	10-140
AISS (Automatic Idling Setting System)	10-108	Engine oil pressure sensor	10-140
Engine control system (Electronic governor)	10-108-1	Engine water temperature sensor	10-141
System diagram	10-108-1	Retarder oil temperature sensor	10-141
Electrical circuit diagram	10-108-2	Torque converter oil temperature sensor	10-141
Fuel injection pump with electronic governor	10-108-3	Air pressure sensor	10-141
Hydraulic circuit diagram	10-108-4	Fuel level sensor	10-142
AISS (Automatic Idling Steering System) ..	10-108-4	Maintenance monitor system	10-143
Engine controller	10-108-5	System diagram	10-143
Sensors, switches	10-108-5	Monitor panel	10-144
Accelerator sensor	10-108-5	Monitor display, functions	10-145
Engine speed sensor	10-108-5	Functinos of switches	10-147
Exhaust brake	10-108-6	Sensors, switches	10-149
System diagram	10-108-6	Engine oil level sensor	10-149
Automatic shift control system	10-109	Radiator water level sensor	10-149
Transmission controller	10-110	Transmission oil level sensor	10-149
Shift lever positions and automatic gear shifting ranges	10-111	Hydraulic oil level sensor	10-150
Shift lever switch	10-114	Retarder oil level sensor	10-150
Sensors, switches	10-115	Air filter clogging sensor	10-150
Transmission speed sensor	10-115	Retarder brake water sensor	10-151
Transmission oil temperature sensor	10-115	Hydraulic filter sensor	10-151
Fill switch	10-116	Retarder oil filter sensor	10-151
Accelerator sensor	10-116	Transmission oil filter sensor	10-151
Shift limit switch	10-117	Battery electrolyte level sensor	10-152
Mode selector switch	10-117	ABS/ACR system	10-154
Shift-indicator system	10-120	ABS/ACR controller (ECU)	10-161
Shift indicator	10-121	ABS pressure control valve	10-162
		ASR control valve	10-165
		Wheel speed sensor	10-167

056103

RADIATOR, TORQUE CONVERTER OIL COOLER

056103

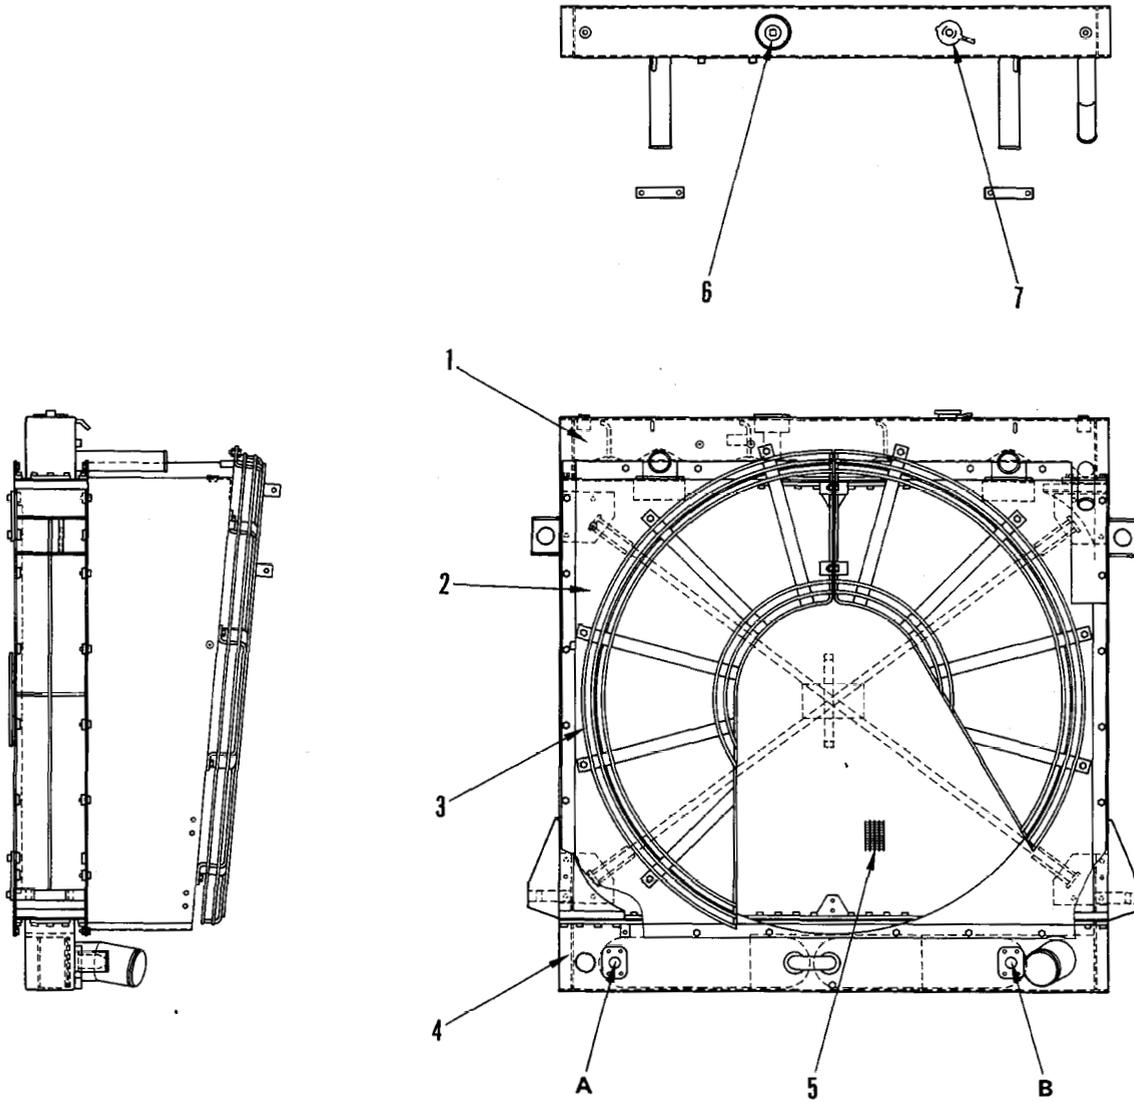

561F03002

1. Upper tank
2. Shroud
3. Net
4. Lower tank
(torque converter oil cooler built in)
5. Core
6. Pick-up for radiator water level sensor
7. Pressure cap

- A: Oil outlet
B: Oil inlet

Specifications

Radiator

Core type: CD-5


Total radiation surface: 151.82 m²

Oil cooler

Element type: Multiple plate

Radiation surface: 3.12 m²

11/ BRAKE OIL COOLER

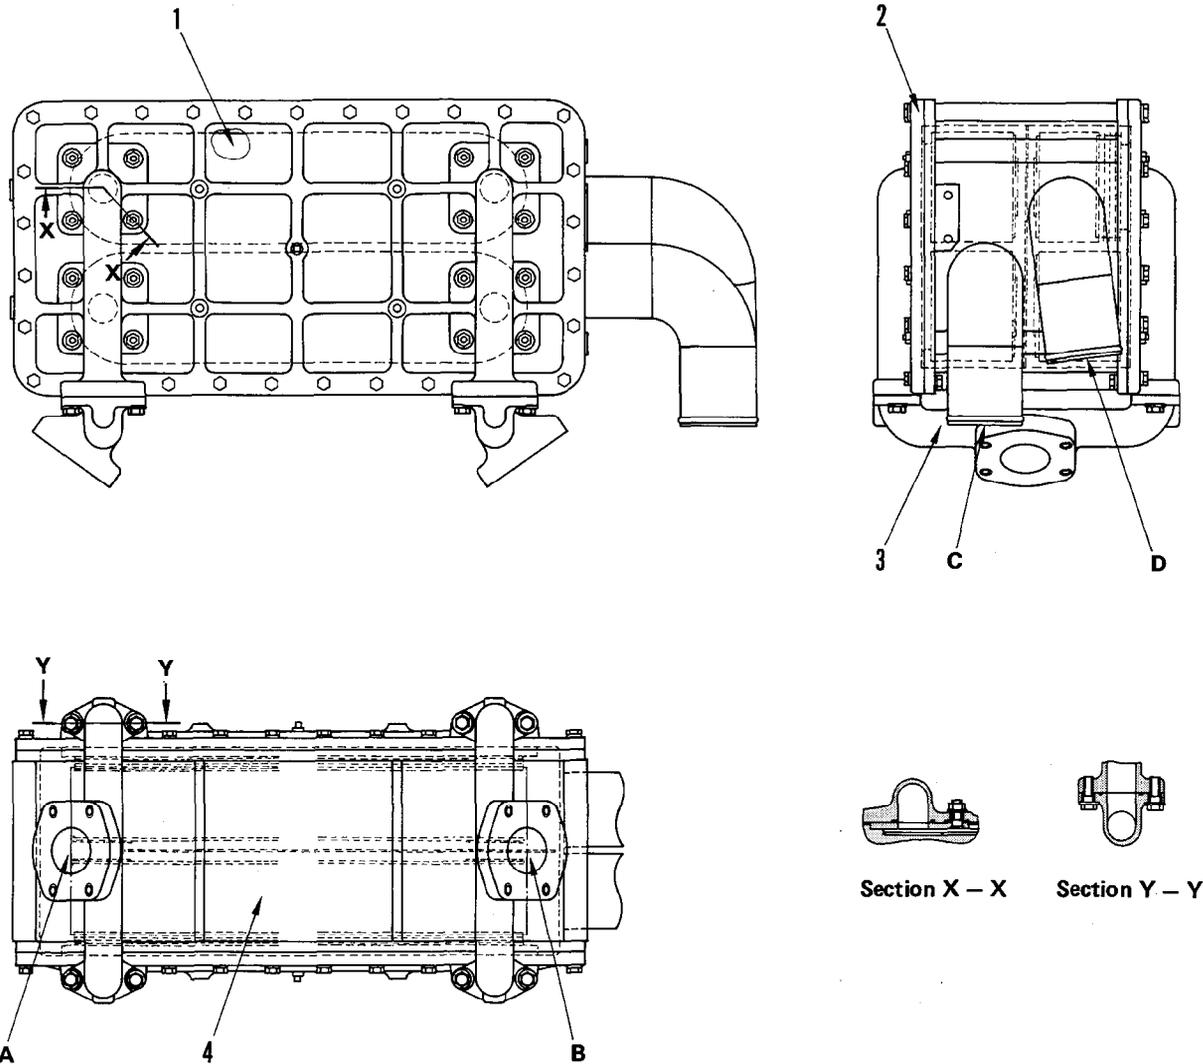

056103

Section X - X

Section Y - Y

561F03003

- 1. Cooler element
- 2. Cover
- 3. Flange
- 4. Case

- A: Oil outlet
- B: Oil inlet
- C: Cooling water outlet
- D: Cooling water inlet

Oil cooler specifications

Element type: Multiple plate

Radiation surface: 9.92 m²

Pressure resistance (oil side): 30 kg/cm²