

SHOP MANUAL

KOMATSU

PC210, 210LC-6K PC240LC, PC240NLC-6K

MACHINE MODEL
**PC210, 210LC-6K
PC240LC, 240NLC-6K**

SERIAL NUMBER
**K32001 and up
K32001 and up**

- This shop manual may contain attachments and optional equipment that are not available in your area. Please consult your local Komatsu distributor for those items you may require. Materials and specifications are subject to change without notice
- PC210, 210LC-6k mount the S6D102E-1 engine;
PC240LC, 240NLC-6k mount the SA6D102E-1 engine.
for details of the engine, see the 102 Service Engine Shop Manual.

CONTENTS

	No. of page
01 GENERAL	01-1
10 STRUCTURE AND FUNCTION	10-1
20 TESTING AND ADJUSTING	20-1
30 DISASSEMBLY AND ASSEMBLY	30-1
40 MAINTENANCE STANDARD	40-1

The affected pages are indicated by the use of the following marks. It is requested that necessary actions be taken to these pages according to the table below.

Mark	Indication	Action required
○	Page to be newly added	Add
●	Page to be replaced	Replace
()	Page to be deleted	Discard

Pages having no marks are those previously revised or made additions.

LIST OF REVISED PAGES

Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision
•	00-1	①		10-18			10-57			10-97			10-136	
•	00-2	①		10-19			10-58			10-98			10-137	
•	00-3	①		10-20			10-59			10-99			10-138	
•	00-4	①		10-21			10-60			10-100			10-139	
•	00-5	①		10-22			10-61			10-101			10-140	
	00-6			10-23			10-62			10-102			10-141	
	00-7			10-24			10-63			10-103			10-142	
	00-8			10-25			10-64			10-104			10-143	
	00-9			10-26			10-65			10-105			10-144	
	00-10			10-27			10-66			10-106			10-145	
	00-11			10-28			10-67			10-107			10-146	
	00-12			10-29			10-68			10-108			10-147	
	00-13			10-30			10-69			10-109			10-148	
	00-14			10-31			10-70			10-110			10-149	
	00-15			10-32			10-71			10-111			10-150	
	00-16			10-33			10-72			10-112			10-151	
	00-17			10-34			10-73			10-113			10-152	
	00-18			10-35			10-74			10-114			10-153	
	00-19			10-36			10-76			10-115			10-154	
	00-20			10-37			10-77			10-116			10-155	
	00-21			10-38			10-78			10-117			10-156	
				10-39			10-79			10-118			10-157	
	10-1			10-40			10-80			10-119			10-158	
	10-2			10-41			10-81			10-120			10-159	
	10-3			10-42			10-82			10-121			10-160	
	10-4			10-43			10-83			10-122			10-161	
	10-5			10-44			10-84			10-123			10-162	
	10-6			10-45			10-85			10-124			10-163	
	10-7			10-46			10-86			10-125			10-164	
	10-8			10-47			10-87			10-126			10-165	
	10-9			10-48			10-88			10-127			10-166	
	10-10			10-49			10-89			10-128			10-167	
	10-11			10-50			10-90			10-129			10-168	
	10-12			10-51			10-91			10-130			10-169	
	10-13			10-52			10-92			10-131			10-170	
	10-14			10-53			10-93			10-132			10-171	
•	10-15	①		10-54			10-94			10-133			10-172	
•	10-16	①		10-55			10-95			10-134			10-173	
	10-17			10-56			10-96			10-135				

Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision
	20-1			20-58		•	20-113	①	•	20-170	①		20-227	
	20-2			20-59			20-114		•	20-171	①		20-228	
	20-3			20-60			20-115			20-172			20-229	
	20-4			20-61			20-116			20-173			20-230	
	20-5			20-62			20-117			20-174			20-231	
	20-6			20-63			20-118			20-175			20-232	
	20-7			20-64			20-119			20-176			20-233	
	20-8			20-65			20-120			20-177			20-234	
	20-9			20-66			20-121			20-178			20-235	
	20-10			20-67			20-122			20-179			20-236	
	20-11			20-68			20-123			20-180			20-237	
	20-12			20-69		•	20-124	①		20-181			20-238	
	20-13			20-70			20-125			20-182			20-239	
	20-14		•	20-71	①		20-126			20-183			20-240	
	20-15		•	20-72	①		20-127			20-184			20-241	
	20-16		•	20-73	①		20-128			20-185			20-242	
	20-17			20-74			20-129			20-186		•	20-243	①
	20-18		◦	20-74-1	①		20-130			20-187		•	20-244	①
	20-19		◦	20-74-2	①		20-131		•	20-188	①	•	20-245	①
	20-20			20-75			20-132			20-189			20-246	
	20-21			20-76			20-133			20-190			20-247	
	20-22			20-77			20-134			20-191			20-248	
	20-23			20-78			20-135			20-192			20-249	
	20-24			20-79			20-136			20-193			20-250	
	20-25			20-80			20-137		•	20-194	①		20-251	
	20-26			20-81			20-138			20-195		•	20-252	①
	20-27			20-82			20-139			20-196			20-253	
	20-28			20-83			20-140			20-197			20-254	
	20-29			20-84			20-141			20-198			20-255	
	20-30			20-85			20-142			20-199			20-256	
	20-31			20-86			20-143			20-200			20-257	
	20-32			20-87			20-144			20-201			20-258	
	20-33			20-88			20-145			20-202			20-259	
	20-34			20-89			20-146			20-203			20-260	
	20-35			20-90			20-147			20-204			20-261	
	20-36			20-91			20-148		•	20-205	①		20-262	
	20-37			20-92			20-149			20-206			20-263	
	20-38			20-93			20-150			20-207			20-264	
	20-39			20-94			20-151			20-208			20-265	
	20-40			20-95			20-152			20-209			20-266	
	20-41			20-96			20-153			20-210			20-267	
	20-42			20-97			20-154			20-211			20-268	
	20-43			20-98			20-155			20-212			20-269	
	20-44			20-99			20-156			20-213			20-270	
	20-45			20-100			20-157			20-214			20-271	
	20-46			20-101			20-158			20-215			20-272	
	20-47			20-102			20-159			20-216			20-273	
	20-48			20-103			20-160			20-217			20-274	
	20-49		•	20-104	①		20-161			20-218			20-275	
	20-50			20-105			20-162			20-219			20-276	
	20-51			20-106			20-163			20-220			20-277	
	20-52			20-107			20-164			20-221			20-278	
	20-53			20-108			20-165			20-222		•	20-279	①
	20-54			20-109			20-166			20-223			20-280	
	20-55			20-110			20-167			20-224				
	20-56			20-111			20-168		•	20-225	①			
	20-57		•	20-112	①		20-169			20-226				

Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision
	30-1			30-55			30-109			40-26				
	30-2			30-56			30-110			40-27				
	30-3			30-57			30-111			40-28				
	30-4			30-58			30-112			40-29				
	30-5			30-59			30-113			40-30				
	30-6			30-60			30-114			40-31				
	30-7			30-61			30-115			40-32				
	30-8			30-62			30-116			40-33				
	30-9			30-63			30-117			40-34				
	30-10			30-64			30-118			40-35				
	30-11			30-65			30-119			40-36				
	30-12			30-66			30-120		•	40-37	①			
	30-13			30-67			30-121		◦	40-37-1	①			
	30-14			30-68			30-122		•	40-38	①			
	30-15			30-69			30-123			40-39				
	30-16			30-70			30-124			40-40				
	30-17			30-71			30-125							
	30-18			30-72			30-126							
	30-19			30-73			30-127							
	30-20			30-74			30-128							
	30-21			30-75			30-129							
	30-22			30-76			30-130							
	30-23			30-77			30-131							
	30-24			30-78			30-132							
	30-25			30-79			30-133							
	30-26			30-80			30-134							
	30-27			30-81			30-135							
	30-28			30-82			30-136							
	30-29			30-83										
	30-30			30-84			40-1							
	30-31			30-85			40-2							
	30-32			30-86			40-3							
	30-33			30-87			40-4							
	30-34			30-88			40-5							
	30-35			30-89			40-6							
	30-36			30-90			40-7							
	30-37			30-91			40-8							
	30-38			30-92			40-9							
	30-39			30-93			40-10							
	30-40			30-94			40-11							
	30-41			30-95			40-12							
	30-42			30-96			40-13							
	30-43			30-97			40-14							
	30-44			30-98			40-15							
	30-45			30-99			40-16							
	30-46			30-100			40-17							
	30-47			30-101			40-18							
	30-48			30-102			40-19							
	30-49			30-103			40-20							
	30-50			30-104			40-21							
	30-51			30-105			40-22							
	30-52			30-106			40-23							
	30-53			30-107			40-24							
	30-54			30-108			40-25							

SAFETY

SAFETY NOTICE

IMPORTANT SAFETY NOTICE

Proper service and repairs extremely important for safe machine operation. The service and repair techniques recommended by Komatsu and described in this manual are both specially designed by Komatsu for the specific purpose.

To prevent injury to workers, the symbol  is used to mark safety precautions in this manual. The cautions accompanying these symbols should always be followed carefully. If any dangerous situation arises or may possibly arise, first consider safety, and take the necessary actions to deal with the situation.

GENERAL PRECAUTIONS

Mistakes in operation are extremely dangerous. Read the Operation and Maintenance carefully BEFORE operating the machine.

1. Before carrying out any greasing or repairs, read all the precautions given on the decals which are fixed to the machine.
2. When carrying out any operation, always wear safety shoes and helmet. Do not wear loose work clothes, or clothes with buttons missing.
 - Always wear safety glasses when hitting parts with a hammer.
 - Always wear safety glasses when grinding parts with a grinder, etc.
3. If welding repairs are needed, always have a trained, experienced welder carry out the work. When carrying out welding work, always wear welding gloves, apron, glasses, cap and other clothes suited for welding work.
4. When carrying out any operation with two or more workers, always agree on the operating procedure before starting. Always inform your fellow workers before starting any step of the operation. Before starting work, hang UNDER REPAIR signs on the controls in the operator's compartment.
5. Keep all tools in good condition and learn the correct way to use them.

6. Decide a place in the repair workshop to keep tools and removed parts. Always keep the tools and parts in their correct places. Always keep the work area clean and make sure that there is no dirt or oil on the floor. Smoke only in the areas provided for smoking. Never smoke while working.

PREPARATIONS FOR WORK.

7. Before adding the oil or making any repairs park the machine on hard, level ground, and block the wheels or tracks to prevent the machine from moving.
8. Before starting work, lower blade, ripper, bucket or any other work equipment to the ground. If this is not possible, insert the safety pin or use blocks to prevent the work equipment from falling. In addition, be sure to lock all the control levers and hang warning signs on them.
9. When disassembling or assembling, support the machine with blocks, jacks or stands before starting work.
10. Remove all mud and oil from the steps or other places used to get on and off the machine. Always use the handrails, ladders or steps when getting on or off the machine. Never jump on or off the machine. If it is impossible to use the handrails, ladders or steps, use a stand to provide safe footing.

PRECAUTIONS DURING WORK

11. When removing the oil filter cap, drain plug or hydraulic pressure measuring plugs, loosen them slowly to prevent the oil from spurting out. Before disconnecting or removing components of the oil, water or air circuits, first remove the pressure completely from the circuit.
12. The water and oil in the circuits are hot when the engine is stopped, so be careful not to get burned.
Wait for the oil and water to cool before carrying out any work on the oil or water circuits.
13. Before starting work, remove the leads from the battery. Always remove the lead from the negative (-) terminal first.
14. When raising heavy components, use a hoist or crane.
Check that the wire rope, chains and hooks are free from damage.
Always use lifting equipment which has ample capacity.
Install the lifting equipment at the correct places.
Use a hoist or crane and operate slowly to prevent the component from hitting any other part.
Do not work with any part still raised by the hoist or crane.
15. When removing covers which are under internal pressure or under pressure from a spring, always leave two bolts in position on opposite sides. Slowly release the pressure, then slowly loosen the bolts to remove.
16. When removing components, be careful not to break or damage the wiring. Damaged wiring may cause electrical fires.
17. When removing piping, stop the fuel or oil from spilling out. If any oil or fuel drops onto the floor, wipe it up immediately. Fuel or oil on the floor can cause you to slip, or can even start fires.
18. As a general rule, do not use gasoline to wash parts. In particular, only use the minimum of gasoline when washing electrical parts.
19. Be sure to assemble all parts again in their original places.
Replace any damaged parts with new parts.
 - When installing hoses and wires, be sure that they will not be damaged by contact with other parts when the machine is being operated.
20. When installing high pressure hoses, make sure that they are not twisted. Damaged tubes are dangerous, so be extremely careful when installing tubes for high pressure circuits. Also, check that connecting parts are correctly installed.
21. When assembling or installing parts, always use the specified tightening torques. When installing protective parts such as guards, or parts which vibrate violently or rotate at high speed, be particularly careful to check that they are installed correctly.
22. When aligning two holes, never insert your fingers or hand. Be careful not to get your fingers caught in a hole.
23. When measuring hydraulic pressure, check that the measuring tool is correctly assembled for taking any measurements.
24. Take care when removing or installing the tracks of track-type machines. When removing the track, the track separates suddenly, so never let anyone stand at either end of the track.

FOREWORD GENERAL

This shop manual has been prepared as an aid to improve the quality of repairs by giving the serviceman an accurate understanding of the product and by showing him the correct way to perform repairs and make judgements. Make sure you understand the contents of this manual and use it to full effect at every opportunity.

This shop manual mainly contains the necessary technical information for operations performed in a service workshop. For ease of understanding, the manual is divided into the following chapters: these chapters are further divided into the each main group of components.

STRUCTURE AND FUNCTION

This section explains the structure and function of each component. It serves not only to give an understanding of the structure, but also serves as reference material for troubleshooting.

TESTING AND ADJUSTING

This section explains checks to be made before and after performing repairs, as well as adjustments to be made at completion of the checks and repairs. Troubleshooting charts correlating "problems" to "Causes" are also included in this section.

DISASSEMBLY AND ASSEMBLY

This section explains the order to be followed when removing, installing, disassembling or assembling each component, as well as precautions to be taken for these operations.

MAINTENANCE STANDARD

This section gives the judgement standards when inspecting disassembled parts.

NOTICE

The specifications contained in this shop manual are subject to change at any time and without any advance notice. Use the specifications given in the book with the latest date.

HOW TO READ THE SHOP MANUAL

VOLUMES

Shop manuals are issued as a guide to carrying out repairs. They are divided as follows:

Chassis volume: Issued for every machine model
Engine model: Issued for each engine series

Electrical volume: } Each issued as one
Attachments volume: } volume to cover all
 models

These various volumes are designed to avoid duplicating the same information. Therefore, to deal with all repairs for any model, it is necessary that chassis, engine, electrical and attachment volumes be available.

DISTRIBUTION AND UPDATING

Any additions, amendments or other changes will be sent to KOMATSU distributors. Get the most up-to-date information before you start any work.

FILING METHOD

1. See the page number on the bottom of the page. File the pages in correct order.
2. Following examples show how to read the page number
 Example 1 (Chassis volume:)

10 - 3

Item number (10. Structure and Function)
 Consecutive page number for each item

Example 2 (Engine Volume:)

12 - 5

Unit number (1. Engine)
 Item number (2. Testing and Adjusting)
 Consecutive page number for each item

3. Additional pages: Additional pages are indicated by a hyphen (-) and number after the page number. File as in the example.

Example:

10-4		12-203
10-4-1	] — Added pages — [	12-203-1
10-4-2		12-203-2
10-5		12-204

REVISED EDITION MARK

When a manual is revised, an edition mark (①,②,③,...) is recorded on the bottom of the pages.

REVISIONS

Revised pages are shown in the LIST OF REVISED PAGES next to the CONTENTS page.

SYMBOLS


So that the shop manual can be of ample practical use, important safety and quality portions are marked with the following symbols.

Symbol	Item	Remarks
	Safety	Special safety precautions are necessary when performing the work.
	Caution	Special technical precautions or other precautions for preserving standards are necessary when performing the work.
	Weight	Weight of parts of systems. Caution necessary when selecting hoisting wire, or when working posture is important, etc.
	Tightening torque	Places that require special attention for the tightening torque during assembly.
	Coat	Places to be coated with adhesives and lubricants, etc.
	Oil, water	Places where oil, water or fuel must be added, and the capacity.
	Drain	Places where oil or water must be drained, and quantity to be drained.

HOISTING INSTRUCTIONS

HOISTING

! Heavy parts (25 kg or more) must be lifted with a hoist, etc. In the **DISASSEMBLY AND ASSEMBLY** section, every part weighing 25 kg or more is indicated with the symbol



- If a part cannot be smoothly removed from the machine by hoisting, the following checks should be made:
 - 1) Check for removal of all bolts fastening the part to the relative parts.
 - 2) Check for existence of another part causing interference with the part to be removed.

WIRE ROPES


- 1) Use adequate ropes depending on the weight of parts to be hoisted, referring to

Wire ropes (Standard "Z" or "S" twist ropes without galvanizing)	
Rope diameter (mm)	Allowable load (tons)
10	1.0
11.2	1.4
12.5	1.6
14	2.2
16	2.8
18	3.6
20	4.4
22.4	5.6
30	10.0
40	18.0
50	28.0
60	40.0

the table below:

- ★ The allowable load value is estimated to be one-sixth or one-seventh of the breaking strength of the rope used.
- 2) Sling wire ropes from the middle portion of the hook.

Slinging near the edge of the hook may cause the rope to slip off the hook during hoisting, and a serious accident can result. Hooks have a maximum strength at the middle portion.

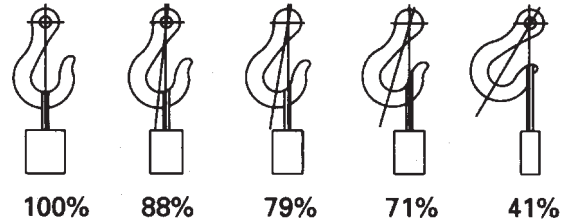


SAD00479

- 3) Do not sling a heavy load with one rope alone, but sling with two or more ropes symmetrically wound onto the load.

! Slinging with one rope may cause turning of the load during hoisting, untwisting of the rope, or slipping of the rope from its original winding position on the load, which can result in a dangerous accident.

- 4) Do not sling a heavy load with ropes forming a wide hanging angle from the hook. When hoisting a load with two or more ropes, the force subjected to each rope will increase with the hanging angles. The table below shows the variation of allowable load (kg) when hoisting is made with two ropes, each of which is allowed to sling up to 1000 kg vertically, at various hanging angles.

When two ropes sling a load vertically, up to 2000 kg of total weight can be suspended. This weight becomes 1000 kg when two ropes make a 120° hanging angle. On the other hand, two ropes are subjected to an excessive force as large as 4000 kg if they sling a 2000 kg load at a lifting angle of 150°.

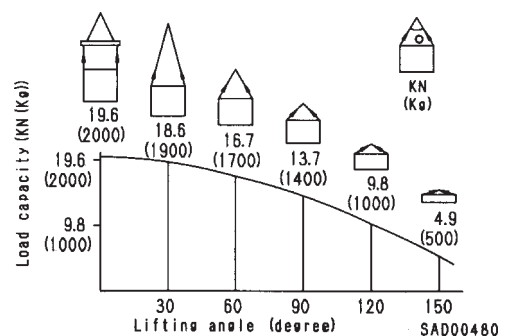

COATING MATERIALS

The recommended coating materials prescribed in Komatsu Shop Manuals are listed below.

Category	Komatsu code	Part No.	Q'ty	Container	Main applications, features
Adhesive	LT-1A	790-129-9030	150 g	Tube	Used to prevent rubber gaskets, rubber cushions, and cork plugs from coming out
	LT-1B	790-129-9050	20 g (x2)	Plastic container	Used in places requiring an immediately effective, strong adhesive. Used for plastics (except polyethylene, polypropylene, tetrafluoroethylene and vinyl chloride), rubber, metal, and non-metal.
	LT-2	09940-00030	50 g	Plastic container	- Features: resistance to heat, chemicals - Used for anti-loosening and sealant purposes for bolts and plugs
	LT-3	790-129-9060 (Set of adhesive and hardening agent)	Adhesive : 1 kg Hardening agent : 500 g	Can	Used as adhesive or sealant for metal, glass, plastic
	LT-4		250 g	Plastic container	Used as sealant for machined holes
	(Loctite 648-50)	790-129-9040	50 cc	-	- Features: Resistance to heat, chemicals - Used at joint portions subject to high temperature
Gasket sealant	LG-1	79A-129-9110	200 g	Tube	Used as adhesive or sealant for gaskets and packings of power train case, etc.
	LG-3	790-129-9070	1kg	Can	- Features: Resistance to heat - Used as sealant for flange surfaces and bolts at high temperature locations, used to prevent seizure - Used as sealant for heat resistant gasket for high temperature locations such as engine precombustion chamber, exhaust pipe
	LG-4	790-120-9020	200 g	Tube	- Features: Resistance to water, oil - Used as sealant for flange surface, thread - Also possible to use as sealant for flanges with large clearance - Used as sealant for mating surfaces of final drive case, transmission case.
	LG-5	790-129-9080	1 kg	Plastic container	- Used as sealant for various threads, pipe joints, flanges - Used as sealant for tapered plugs, elbows, nipples of hydraulic piping
	LG-6	09940-00011	250 g	Tube	- Features: Silicon based, resistance to heat, cold - Used as sealant for flange surface, thread - Used as sealant for oil pan, final drive case, etc.
	LG-7	09920-00150	150 g	Tube	- Features: Silicon based, quick hardening type - Used as sealant for flywheel housing, intake manifold, oil pan, thermostat housing, etc.
Rust prevention lubricant	-	09940-00051	60 g	Can	Used as lubricant for sliding parts (to prevent squeaking)
Molybdenum disulphide lubricant	-	09940-00040	200 g	Tube	- Used to prevent seizure or scuffing of the thread when pressure fitting or shrink fitting - Used as lubricant for linkage, bearings, etc.
Lithium grease	G2-LI	SYG350LI SYG-400LI SYG-400LI-A SYG-160LI SYGA-160CNLI	Various	Various	General purpose type
Calcium grease	G2-CA	SSG2-400CA SYG2-350CA SYG2-400CA-A SYG2-160CA SYGA-16NCA	Various	Various	Used for normal temperature, light load bearing at places in contact with water or steam
Molybdenum disulphide grease	-	SYG2-400M	400 g (10 per case)	Bellows type	Used for places with heavy load

STANDARD TIGHTENING TORQUE

STANDARD TIGHTENING TORQUES OF BOLTS AND NUTS

The following charts give the standard tightening torques of bolts and nuts. Exceptions are given in section of **DISASSEMBLY AND ASSEMBLY**.

1 Kgm = 9.806 Nm


Thread diameter of bolt	Width across flats	 SAD00481	 SAD00482
		kgm	Nm
6	10	1.35 ± 0.15	13.2 ± 1.4
8	13	3.2 ± 0.3	31.4 ± 2.9
10	17	6.7 ± 0.7	65.7 ± 6.8
12	19	11.5 ± 1.0	112 ± 9.8
14	22	18.0 ± 2.0	177 ± 19
16	24	28.5 ± 3	279 ± 29
18	27	39 ± 4	383 ± 39
20	30	56 ± 6	549 ± 58
22	32	76 ± 8	745 ± 78
24	36	94.5 ± 10	927 ± 98
27	41	135 ± 15	1320 ± 140
30	46	175 ± 20	1720 ± 190
33	50	225 ± 25	2210 ± 240
36	55	280 ± 30	2750 ± 290
39	60	335 ± 25	3280 ± 340

- ★ This torque table does not apply to the bolts with nylon packaging or other nonferrous metal washers are to be used, or which require tightening to otherwise specified torque.

TIGHTENING TORQUE OF SPLIT FLANGE BOLTS

Use these torques for split flange bolts.

Thread daimeter of bolt	Width across flats	Tightening torque	
		kgm	Nm
mm	mm		
10	14	6.7 ± 0.7	65.7 ± 6.8
12	17	11.5 ± 1	112 ± 9.8
16	22	28.5 ± 3	279 ± 29



TIGHTENING TORQUE FOR FLRED NUTS

Use these torques for flared part of nut.

SAD00483

Thread daimeter of bolt	Width across flats	Tightening torque	
		kgm	Nm
mm	mm		
14	19	2.5 ± 0.5	24.5 ± 4.9
18	24	5 ± 2	49 ± 19.6
22	27	8 ± 2	78.5 ± 19.6
24	32	14 ± 3	137.3 ± 29.4
30	36	18 ± 3	176.5 ± 29.4
33	41	20 ± 5	196.1 ± 49
36	46	25 ± 5	245.2 ± 49
42	55	30 ± 5	294.2 ± 49

ELECTRIC WIRE CODE

In the wiring diagrams, various colors and symbols are employed to indicate the thickness of wires. This wire code table will help you understand WIRING DIAGRAMS.

Example: 5WB indicates a cable having a nominal number 5 and white coating with black stripe.

CLASSIFICATION BY THICKNESS

Nominal number	Copper wire			Cable O.D. (mm)	Current rating (A)	Applicable circuit
	Number of strands	Dia. of strands (mm)	Cross section (mm ²)			
0.85	11	0.32	0.88	2.4	12	Starting, lighting, signal etc.
2	26	0.32	2.09	3.1	20	Lighting, signal etc.
5	65	0.32	5.23	4.6	37	Charging and signal
15	84	0.45	13.36	7.0	59	Starting (Glow plug)
40	85	0.80	42.73	11.4	135	Starting
60	127	0.80	63.84	13.6	178	Starting
100	217	0.80	109.1	17.6	230	Starting

CLASSIFICATION BY COLOR AND CODE

Priority	Circuits		Charging	Ground	Starting	Lighting	Instrument	Signal	Other
	Clas-sification								
1	Pri-mary	Code	W	B	B	R	Y	G	L
		Color	White	Black	Black	Red	Yellow	Green	Blue
2	Auxi-liary	Code	WR	-	BW	RW	YR	GW	LW
		Color	White & Red	-	Black & White	Red & White	Yellow & Red	Green & White	Blue & White
3		Code	WB	-	BY	RB	YB	GR	LR
		Color	White & Black	-	Black & Yellow	Red & Black	Yellow & Black	Green & Red	Blue & Red
4		Code	WL	-	BR	RY	YG	GY	LY
		Color	White & Blue	-	Black & Red	Red & Yellow	Yellow & Green	Green & Yellow	Blue & Yellow
5		Code	WG	-	-	RG	YL	GB	LBB
		Color	White & Green	-	-	Red & Green	Yellow & Blue	Green & Black	Blue & Black
6		Code	-	-	-	RL	YW	GL	-
		Color	-	-	-	Red & Blue	Yellow & White	Green & Blue	-

CONVERSION TABLE

METHOD OF USING THE CONVERSION TABLE

The Conversion Table in this section is provided to enable simple conversion of figures. For details of the method of using the Conversion Table, see the example given below.

EXAMPLE

- Method of using the Conversion Table to convert from millimeters to inches
- Convert 55 mm to inches
 - Locate the number 50 in the vertical column at the left side, take this as Ⓐ, then draw a horizontal line from Ⓐ.
 - Locate the number 5 in the row across the top, take this as Ⓑ, then draw a perpendicular line down from Ⓑ.
 - Take the point where the two lines cross as Ⓒ. This point Ⓒ gives the value when converting from millimeters to inches. Therefore, 55mm = 2.165 inches.
 - Convert 550 mm into inches.
 - The number 550 does not appear in the table, so divide by 10 (move the decimal point one place to the left) to convert it to 55 mm.
 - Carry out the same procedure as above to convert 55 mm to 2.165 inches.
 - The original value (550 mm) was divided by 10, so multiply 2.165 inches by 10 (move the decimal point one place to the right) to return to the original value. This gives 550 mm = 21.65 inches.

Ⓑ

Ⓐ

Millimeters to inches							1 mm = 0.03937 in			
	0	1	2	3	4	5	6	7	8	9
0	0	0.039	0.079	0.118	0.157	0.197	0.236	0.276	0.315	0.354
10	0.394	0.433	0.472	0.512	0.551	0.591	0.630	0.669	0.709	0.748
20	0.787	0.827	0.866	0.906	0.945	0.984	1.024	1.063	1.102	1.142
30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.536
40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
50	1.969	2.008	2.047	2.087	2.126	2.165	2.205	2.244	2.283	2.323
60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.717
70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.032	3.071	3.110
80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

Millimeters to Inches

1 mm = 0.03937 in

	0	1	2	3	4	5	6	7	8	9
0	0	0.039	0.079	0.118	0.157	0.197	0.236	0.276	0.315	0.354
10	0.394	0.433	0.472	0.512	0.551	0.591	0.630	0.669	0.709	0.748
20	0.787	0.827	0.866	0.906	0.945	0.984	1.024	1.063	1.102	1.142
30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.536
40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
50	1.969	2.008	2.047	2.087	2.126	2.165	2.205	2.244	2.283	2.323
60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.712
70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.032	3.071	3.110
80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

Kilogram to Pound

1kg = 2.2046 lb

	0	1	2	3	4	5	6	7	8	9
0	0	2.20	4.41	6.61	8.82	11.02	13.23	15.43	17.64	19.84
10	22.05	24.25	26.46	28.66	30.86	33.07	35.27	37.48	39.68	41.89
20	44.09	46.30	48.50	50.71	51.91	55.12	57.32	59.53	61.73	63.93
30	66.14	68.34	70.55	72.75	74.96	77.16	79.37	81.57	83.78	85.98
40	88.18	90.39	92.59	94.80	97.00	99.21	101.41	103.62	105.82	108.03
50	110.23	112.44	114.64	116.85	119.05	121.25	123.46	135.66	127.87	130.07
60	132.28	134.48	136.69	138.89	141.10	143.30	145.51	147.71	149.91	152.12
70	154.32	156.53	158.73	160.94	163.14	165.35	167.55	169.76	171.96	174.17
80	176.37	178.57	180.78	182.98	185.19	187.39	189.60	191.80	194.01	196.21
90	198.42	200.62	202.03	205.03	207.24	209.44	211.64	213.85	216.05	218.26

Litre to U.S. Gallon

1ℓ = 0.2642 U.S. Gal

	0	1	2	3	4	5	6	7	8	9
0	0	0.264	0.528	0.793	1.057	1.321	1.585	1.849	2.113	2.378
10	2.642	2.906	3.170	3.434	3.698	3.963	4.227	4.491	4.755	5.019
20	5.283	5.548	5.812	6.076	6.3340	6.604	6.869	7.133	7.397	7.661
30	7.925	8.189	8.454	8.718	8.982	9.246	9.510	9.774	10.039	10.303
40	10.567	10.831	11.095	11.359	11.624	11.888	12.152	12.416	12.680	12.944
50	13.209	13.473	13.737	14.001	14.265	14.529	14.795	15.058	15.322	15.586
60	15.850	16.115	16.379	16.643	16.907	17.171	17.435	17.700	17.964	18.228
70	18.492	18.756	19.020	19.285	19.549	19.813	20.077	20.341	20.605	20.870
80	21.134	21.398	21.662	21.926	22.190	22.455	22.719	22.983	23.247	23.511
90	23.775	24.040	24.304	24.568	24.832	25.096	25.361	25.625	25.889	26.153

Litre to U.K. Gallon

1ℓ = 0.21997 U.K. Gal

	0	1	2	3	4	5	6	7	8	9
0	0	0.220	0.440	0.660	0.880	1.100	1.320	1.540	1.760	1.980
10	2.200	2.420	2.640	2.860	3.080	3.300	35.20	3.740	3.950	4.179
20	4.399	4.619	4.839	5.059	5.279	5.499	5.719	5.939	6.159	6379
30	6.599	6.819	7.039	7.259	7.479	7.969	7.919	8.139	8.359	8.579
40	8.799	9.019	9.239	9.459	9.679	9.899	10.119	10.339	10.559	10.778
50	10.998	11.281	11.438	11.658	11.878	12.098	12.318	12.528	12.758	12.978
60	13.198	13.418	13.638	13.858	14.078	14.298	14.518	14.738	14.958	15.178
70	15.398	15.618	15.838	16.058	16.278	16.498	16.718	16.938	17.158	17.378
80	17.598	17.818	18.037	18.257	18.477	18.697	18.917	19.137	19.357	19.577
90	19.797	20.017	20.237	20.457	20.677	20.897	21.117	21.337	21.557	21.777

kgm to ft. lb

1 kgm = 7.233 ft. lb

	0	1	2	3	4	5	6	7	8	9
0	0	7.2	14.5	21.7	28.9	36.2	43.4	50.6	57.9	65.1
10	72.3	79.6	86.8	94.0	101.3	108.5	115.7	123.0	130.2	137.4
20	144.7	151.9	159.1	166.4	173.6	180.8	188.1	195.3	202.5	209.8
30	217.0	224.2	231.5	238.7	245.9	253.2	260.4	267.6	274.9	282.1
40	289.3	296.6	303.8	311.0	318.3	325.5	332.7	340.0	347.2	354.4
50	361.7	368.9	376.1	383.4	390.6	397.8	405.1	412.3	419.5	426.8
60	434.0	441.2	448.5	455.7	462.9	470.2	477.4	484.6	491.8	499.1
70	506.3	513.5	520.8	528.0	535.2	542.5	549.7	556.9	564.2	571.4
80	578.6	585.9	593.1	600.3	607.6	614.8	622.0	629.3	636.5	643.7
90	651.0	658.2	665.4	672.7	679.9	687.1	694.4	701.6	708.8	716.1
100	723.3	730.5	737.8	745.0	752.2	759.5	766.7	773.9	781.2	788.4
110	795.6	802.9	810.1	817.3	824.6	831.8	839.0	846.3	853.5	860.7
120	868.0	875.2	882.4	889.7	896.9	904.1	911.4	918.6	925.8	933.1
130	940.3	947.5	954.8	962.0	969.2	976.5	983.7	990.9	998.2	1005.4
140	1012.6	1019.9	1027.1	1034.3	1041.5	1048.8	1056.0	1063.2	1070.5	1077.7
150	1084.9	1092.2	1099.4	1106.6	1113.9	1121.1	1128.3	1135.6	1142.8	1150.0
160	1157.3	1164.5	1171.7	1179.0	1186.2	1193.4	1200.7	1207.9	1215.1	1222.4
170	1129.6	1236.8	1244.1	1251.3	1258.5	1265.8	1273.0	1280.1	1287.5	1294.7
180	1301.9	1309.2	1316.4	1323.6	1330.9	1338.1	1245.3	1352.6	1359.8	1367.0
190	1374.3	1381.5	1388.7	1396.0	1403.2	1410.4	1417.7	1424.9	1432.1	1439.4

kg/cm² to lb/in²

1 kg/cm² = 14.2233 lb/in²

	0	1	2	3	4	5	6	7	8	9
0	0	14.2	28.4	42.7	56.9	71.1	85.3	99.6	113.8	128.0
10	142.2	156.5	170.7	184.9	199.1	213.4	227.6	241.8	256.0	270.2
20	284.5	298.7	312.9	327.1	341.4	355.6	369.8	384.0	398.3	412.5
30	426.7	440.9	455.1	469.4	483.6	497.8	512.0	526.3	540.5	554.7
40	568.9	583.2	597.4	611.6	625.8	640.1	654.3	668.5	682.7	696.9
50	711.2	725.4	739.6	753.8	768.1	782.3	796.5	810.7	825.0	839.2
60	853.4	867.6	881.8	896.1	910.3	924.5	938.7	953.0	967.2	981.4
70	995.6	1010	1024	1038	1053	1067	1081	1095	1109	1124
80	1138	1152	1166	1181	1195	1209	1223	1237	1252	1266
90	1280	1294	1309	1323	1337	1351	1365	1380	1394	1408
100	1422	1437	1451	1465	1479	1493	1508	1522	1536	1550
110	1565	1579	1593	1607	1621	1636	1650	1664	1678	1693
120	1707	1721	1735	1749	1764	1778	1792	1806	1821	1835
130	1849	1863	1877	1892	1906	1920	1934	1949	1963	1977
140	1991	2005	2020	2034	2048	2062	2077	2091	2105	2119
150	2134	2148	2162	2176	2190	2205	2219	2233	2247	2262
160	2276	2290	2304	2318	2333	2347	2361	2375	2389	2404
170	2418	2432	2446	2460	2475	2489	2503	2518	2532	2546
180	2560	2574	2589	2603	1617	2631	2646	2660	2674	2688
190	2702	2717	2731	2745	2759	2773	2788	2802	2816	2830
200	2845	2859	2873	2887	2901	2916	2930	2944	2958	2973
210	2987	3001	3015	3030	3044	3058	3072	3086	3101	3115
220	3129	3143	3158	3172	3186	3200	3214	3229	3243	3257
230	3271	3286	3300	3314	3328	3343	3357	4471	3385	3399
240	3414	3428	3442	3456	3470	3485	3499	3513	3527	3542

Temperature

Fahrenheit-Centigrade Conversion; a simple way to convert a Fahrenheit temperature reading into a Centigrade temperature reading or vice is to enter the accompanying table in the center or boldface column of figures.

These figures refer to the temperature in either Fahrenheit or Centigrade degrees.

If it desired to convert from Fahrenheit to Centigrade degrees, consider the center column as a table of Fahrenheit temperatures and read the corresponding Centigrade temperature in the column at the left.

If it is desired to convert from Centigrade to Fahrenheit degrees, consider the center column as a table of Centigrade values, and read the corresponding Fahrenheit temperature on the right.

$$1^{\circ}\text{C} = 33.8^{\circ}\text{F}$$

°C		°F	°C		°F	°C		°F	°C		°F
-40.4	-40	-40.0	-11.7	11	51.8	7.8	46	114.8	27.2	81	117.8
-37.2	-35	-31.0	-11.1	12	53.6	8.3	47	116.6	27.8	82	179.6
-34.4	-30	-22.0	-10.6	13	55.4	8.9	48	118.4	28.3	83	181.4
-31.7	-25	-13.0	-10.0	14	57.2	9.4	49	120.2	28.9	84	183.2
-28.9	-20	-4.0	-9.4	15	59.0	10.0	50	122.0	29.4	85	185.0
-28.3	-19	-2.2	-8.9	16	60.8	10.6	51	123.8	30.0	86	186.8
-27.8	-18	-0.4	-8.3	17	62.6	11.1	52	125.6	30.6	87	188.6
-27.2	-17	1.4	-7.8	18	64.4	11.7	53	127.4	31.1	88	190.4
-26.7	-16	3.2	-7.2	19	66.2	12.2	54	129.2	31.7	89	192.2
-26.1	-15	5.0	-6.7	20	68.0	12.8	55	131.0	32.2	90	194.0
-25.6	-14	6.8	-6.1	21	69.8	13.3	56	132.8	32.8	91	195.8
-25.0	-13	8.6	-5.6	22	71.6	13.9	57	134.6	33.3	92	197.6
-24.4	-12	10.4	-5.0	23	73.4	14.4	58	136.4	33.9	03	199.4
-23.9	-11	12.2	-4.4	24	73.4	15.0	59	138.2	34.4	94	201.2
-23.3	-10	14.0	-3.9	25	75.2	15.6	60	140.0	35.0	95	203.0
-22.8	-9	15.8	-3.3	26	77.0	16.1	61	141.8	35.6	96	204.8
-22.2	-8	17.6	-2.8	27	78.8	16.7	62	143.6	36.1	97	206.6
-21.7	-7	19.4	-2.2	28	80.6	17.2	63	145.4	36.7	98	208.4
-21.1	-6	21.2	-1.7	29	82.4	17.8	64	147.2	37.2	99	210.2
-20.6	-5	23.0	-1.1	30	86.0	18.3	65	149.0	37.8	100	212.0
-20.0	-4	24.8	-0.6	31	87.8	18.9	66	150.8	40.6	105	221.0
-19.4	-3	26.6	0	32	89.6	19.4	67	152.6	43.3	110	230.0
-18.9	-2	28.4	0.6	33	91.4	20.0	68	154.4	46.1	115	239.0
-18.3	-1	30.2	1.1	34	93.2	20.6	69	156.2	48.9	120	248.0
-17.8	0	32.0	1.7	35	95.0	21.1	70	158.0	51.7	125	257.0
-17.2	1	33.8	2.2	36	96.8	21.7	71	159.8	54.4	130	266.0
-16.7	2	35.6	2.8	37	98.6	22.2	72	161.6	57.2	135	275.0
-16.1	3	37.4	3.3	38	100.4	22.8	73	163.4	60.0	140	284.0
-15.6	4	39.2	3.9	39	102.2	23.3	74	165.2	62.7	145	293.0
-15.0	5	41.0	4.4	40	104.0	23.9	75	167.0	65.6	150	302.0
-14.4	6	42.8	5.0	41	105.8	24.4	76	168.8	68.3	155	311.0
-13.9	7	44.6	5.6	42	107.6	25.0	77	170.6	71.1	160	320.0
-13.3	8	46.4	6.1	43	109.4	25.6	78	172.4	73.9	165	329.0
-12.8	9	48.2	6.7	44	111.2	26.1	79	174.2	76.7	170	338.0
-12.2	10	50.0	7.2	45	113.0	26.7	80	176.0	79.4	175	347.0

MEMORANDA

10 STRUCTURE AND FUNCTION

ENGINE RELATED PARTS	10-6
RADIATOR • OIL COOLER	10-7
POWER TRAIN	10-8
FINAL DRIVE	10-9
PC210, PC 240	
SWING CIRCLE	10-10
SWING MACHINERY	10-11
PC210LC, PC240LC	
TRACK FRAME • RECOIL SPRING	10-12
TRACK SHOE	10-13
HYDRAULIC PIPING DRAWING	10-14
HYDRAULIC CIRCUIT DIAGRAM	10-15 a/b
HYDRAULIC TANK	10-16
HYDRAULIC PUMP	10-17
Basic pump	10-17
Outline	10-17
Function	10-20
Structure	10-20
Operation	10-21
LS and PC valve	10-24
Function	10-25
Operation	10-26
CONTROL VALVE	10-36
Outline	10-36
9-spool valve (standard + 3 service valves)	10-37
Main structure	10-38
6-spool valve	10-41
7-spool valve	10-42
8-spool valve	10-43


SAFETY-SUCTION VALVE FOR SERVICE VALVE	10-44
SELF-REDUCING PRESSURE VALVE	10-45
Function	10-47
Operation	10-47
CLSS	10-50
Outline of CLSS	10-50
Features	10-50
Structure	10-50
Basic Principle	10-51
Operation for each function and valve	10-53
Hydraulic circuit diagram for system	10-53
Unload valve	10-56
Main relief valve (2-stage type)	10-57
Introduction of LS pressure	10-59
LS bypass valve	10-60
Pressure compensation valve	10-61
Shuttle valve inside pressure compensation valve	10-64
Variable type pressure compensation valve (for service valve)	10-65
Boom regeneration circuit	10-67
Arm regeneration circuit	10-69
Pump merge-divider valve	10-70
LS select valve	10-72
Spool stroke modulation	10-73
Timing valve	10-74
2-stage safety valve (installed to boom cylinder head)	10-75
Operation of CLSS system as a whole	10-76
When all work equipment is at neutral	10-76
Pump flow divided, one side actuated, other side neutral	10-78
Pump flow merged, arm OUT, standard mode relief (cut-off control)	10-80
Pump flow divided, bucket DUMP, power max. relief	10-82
Pump flow merged, boom RAISE	10-84
Pump flow merged, swing operated independently	10-86
Pump flow divided, travel operated independently	10-88
Pump flow merged, compound operation	10-90
SWING MOTOR	10-92
BASIC MOTOR	10-92
Swing lock valve	10-94
Operation	10-94
CENTER SWIVEL JOINT	10-95
TRAVEL MOTOR	10-96
Operation of motor	10-98
Operation of parking brake	10-100
Operation of brake valve	10-101
VALVE CONTROL	10-105
WORK EQUIPMENT • SWING PPC VALVE	10-106
Operation	10-108
TRAVEL PPC VALVE	10-110
Operation	10-112

SERVICE PPC VALVE	10-114
Operation	10-112
SAFETY LOCK VALVE	10-118
PPC ACCUMULATOR	10-118
STRAIGHT-TRAVEL SYSTEM.....	10-119
Function	10-119
EPC SOLENOID VALVE	10-120
Operation	10-121
OVERLOAD WARNING DEVICE	10-122
Outline	10-122
Operation	10-123
HOSE BURST PROTECTION VALVE (boom)	10-124
Function	10-124
Operation	10-125
WORK EQUIPMENT	10-127
ELECTRICAL WIRING DIAGRAM	10-128
ELECTRICAL CIRCUIT DIAGRAM	10-130
ENGINE CONTROL SYSTEM	10-131
Function	10-131
Operation of system	10-132
Components of system	10-133
Fuel control dial	10-133
Governor motor	10-134
Engine throttle • pump controller	10-135
ELECTRONIC CONTROL SYSTEM	10-137
Control function	10-137
Total system diagram	10-138
Pump and engine mutual control function	10-139
Function	10-140
Control method in each mode	10-141
Pump control function when travelling	10-143
Control function when pump prolix switch is ON	10-143
Pump and valve control function	10-144
Function	10-145
Power maximizing • Swift slow-down function	10-147
Function	10-147
Auto-deceleration function	10-148
Function	10-149
Operation	10-149
Automatic warming-up and engine overheat prevention function	10-150
Function	10-150
Swing control function	10-152
Function	10-153
Travel control function	10-154
Function	10-155



Active mode function	10-156
Function	10-156
Components of system	10-159
Engine speed sensor	10-159
PPC oil pressure switch	10-159
Pump pressure sensor	10-160
PC Prolix resistor	10-161
MACHINE MONITOR SYSTEM	10-162
Function	10-163
Monitor panel	10-163
Outline	10-163
Monitor display	10-164
Content of display	10-165
Oil maintenance function	10-166
Function and operation	10-166
Setting change interval	10-166
Display timing, content	10-167
Elapsed time reset	10-167
Demo mode	10-167
Switches	10-168
Switch actuation table	10-168
HOW TO SET TELEPHONE NUMBER	10-169
SENSORS	10-170
Coolant level sensor	10-170
Engine oil level sensor	10-171
Hydraulic oil sensor	10-171
Engine oil pressure sensor	10-171
Coolant temperature sensor	10-172
Fuel level sensor	10-172
Air cleaner clogging sensor	10-172

MEMORANDA


ENGINE RELATED PARTS

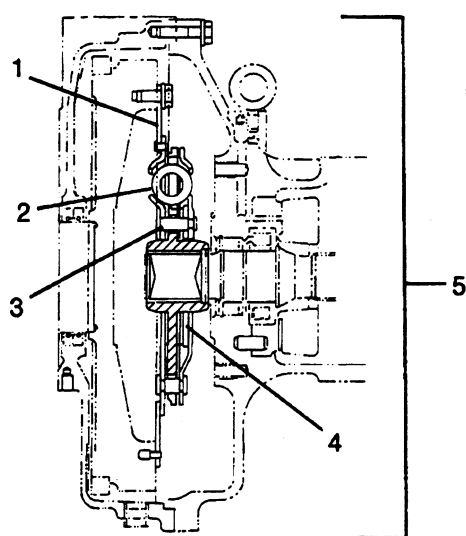


SECTION A-A

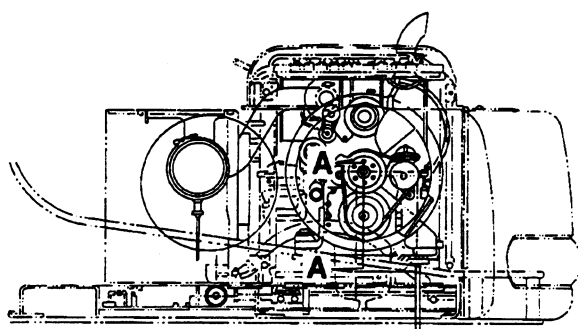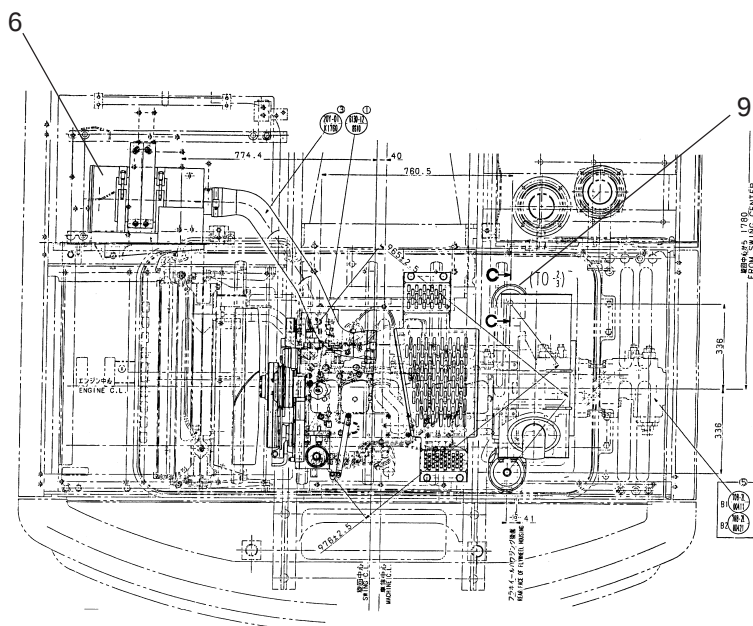


SECTION B-B

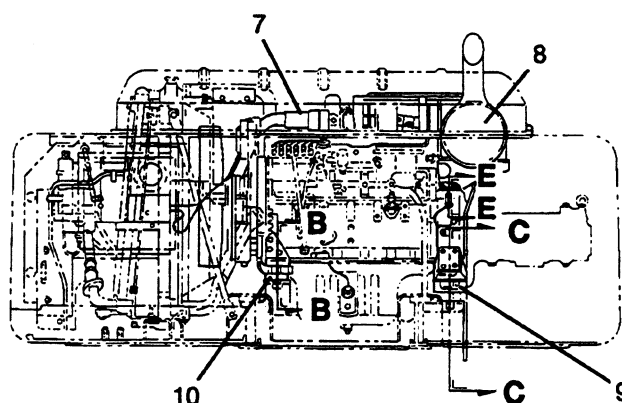

SECTION C-C



SECTION D-D



SECTION E-E

1. Drive plate
2. Torsion spring
3. Stopper pin
4. Friction plate
5. Damper assembly
6. Air cleaner
7. Intake connector
8. Muffler
9. Rear engine mount
10. Front engine mount


SPECIFICATIONS

The damper assembly is a wet type
Oil capacity: 0.75 l.

RADIATOR • OIL COOLER

STRUCTURE AND FUNCTION

RADIATOR • OIL COOLER

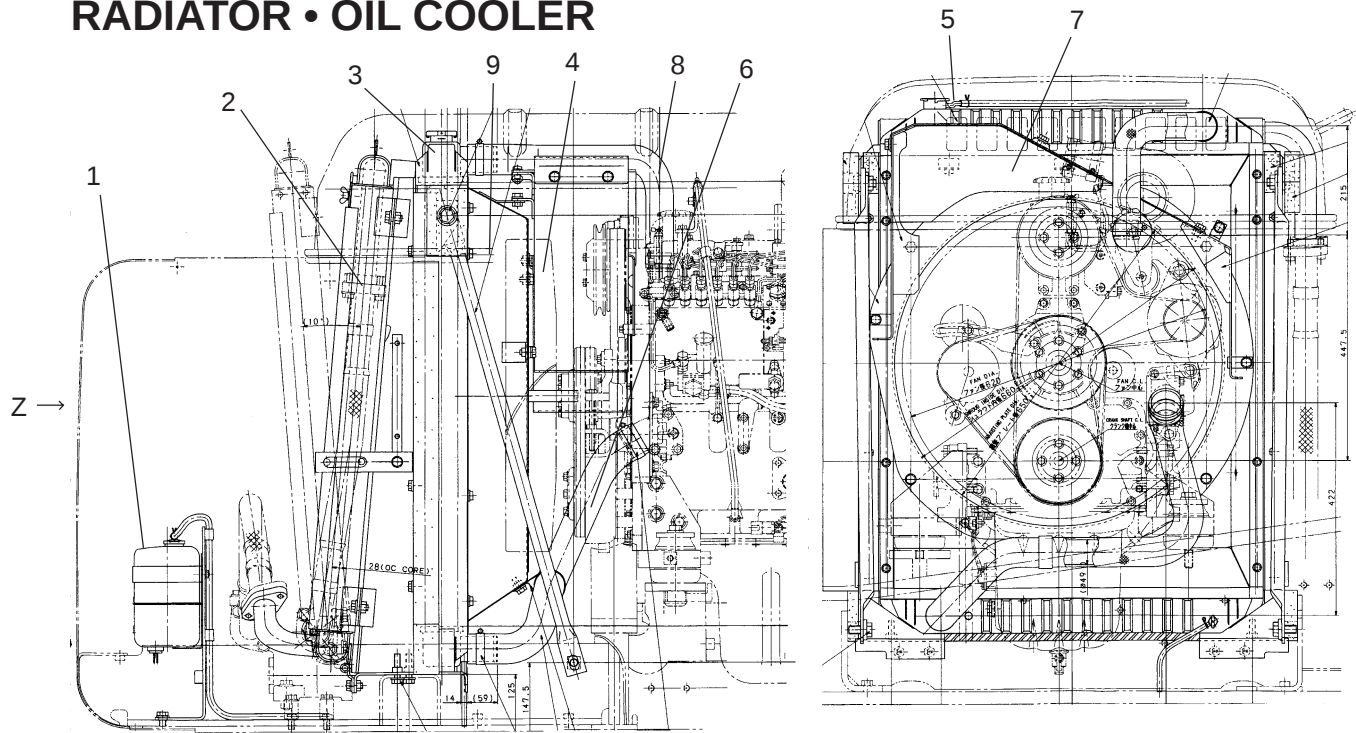

- | | |
|-------------------|-------------------------|
| 1. Reservoir tank | 6. Radiator outlet hose |
| 2. Oil cooler | 7. Guard |
| 3. Radiator | 8. Radiator inlet hose |
| 4. Fan | 9. Shroud |
| 5. Radiator cap | |

SPECIFICATIONS
Radiator: CWX-4
Oil cooler: SF-3

