

SHOP MANUAL **KOMATSU** PW170ES-6K

MACHINE MODEL

PW170ES-6K

SERIAL NUMBER

K32001 and up
K34001 and up

- This shop manual may contain attachments and optional equipment that are not available in your area. Please consult your local Komatsu distributor for those items you may require. Materials and specifications are subject to change without notice.

CONTENTS

	No. of page
01 GENERAL	01-1
10 STRUCTURE AND FUNCTION	10-1
20 TESTING AND ADJUSTING	20-1
30 DISASSEMBLY AND ASSEMBLY	30-1
40 MAINTENANCE STANDARD	40-1

The affected pages are indicated by the use of the following marks. It is requested that necessary actions be taken to these pages according to the table below.

Mark	Indication	Action required
○	Page to be newly added	Add
●	Page to be replaced	Replace
()	Page to be deleted	Discard

Pages having no marks are those previously revised or made additions.

LIST OF REVISED PAGES

Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision
●	00-1	①		10-16			10-37			10-77			10-116	
○	00-2	①		10-17			10-38			10-78			10-117	
○	00-2-1	①		10-18			10-39			10-79			10-118	
○	00-2-2	①		10-19			10-40			10-80			10-119	
○	00-2-3	①		10-20			10-41			10-81			10-120	
○	00-2-4	①		10-21			10-42			10-82			10-121	
○	00-3	①		10-22			10-43			10-83			10-122	
○	00-4	①		10-23			10-44			10-84			10-123	
○	00-5	①		10-23A			10-45			10-85			10-124	
○	00-6	①	●	10-24	①		10-46			10-86			10-125	
○	00-7	①	○	10-24-1	①		10-47			10-87			10-126	
○	00-8	①		10-25			10-48			10-88			10-127	
○	00-9	①		10-26			10-49			10-89			10-128	
○	00-10	①		10-27			10-50			10-90			10-129	
○	00-11	①		10-28			10-51			10-91			10-130	
○	00-12	①		10-29			10-52			10-92			10-130-1	
○	00-13	①		10-30			10-53			10-93			10-130-2	
○	00-14	①		10-31			10-54			10-94			10-130-3	
○	00-15	①		10-31A			10-55			10-95			10-131	
○	00-16	①		10-31B			10-56			10-96			10-132	
○	00-17	①		10-31C			10-57			10-97			10-133	
				10-31D			10-58			10-98			10-134	
●	10-1	①		10-31E			10-59			10-99			10-135	
	10-2			10-31F			10-60			10-100			10-136	
	10-3			10-31G			10-61			10-101			10-137	
	10-4			10-31H			10-62			10-102			10-138	
	10-5			10-31I			10-63			10-103			10-139	
	10-6			10-31J			10-64			10-104			10-140	
	10-7			10-31K			10-65			10-105			10-141	
	10-8			10-31L			10-66			10-106			10-142	
	10-9			10-32			10-67			10-107			10-143	
	10-9A			10-33			10-68			10-108			10-144	
	10-9B			10-34			10-69			10-109			10-145	
	10-10			10-34A			10-70			10-110			10-146	
	10-11			10-34B			10-71			10-111			10-147	
	10-12			10-35			10-72			10-112			10-148	
	10-13			10-36			10-73			10-113			10-149	
	10-14			10-36A			10-74			10-114			10-150	
	10-15			10-36B			10-76			10-115			10-151	

Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision
	20-1			20-58			20-113			20-170			20-227	
	20-2			20-59			20-114			20-171			20-228	
	20-3			20-60			20-115			20-172			20-229	
	20-4		•	20-61	①		20-116			20-173			20-230	
	20-5		•	20-62	①		20-117			20-174			20-231	
	20-6		◦	20-62-1	①		20-118			20-175			20-232	
	20-7		◦	20-62-2	①		20-119			20-176			20-233	
	20-8		•	20-63	①		20-120			20-177			20-234	
	20-9			20-64			20-121			20-178			20-235	
	20-10			20-65			20-122			20-179			20-236	
	20-11			20-66			20-123			20-180			20-237	
	20-12			20-67			20-124			20-181			20-238	
	20-13			20-68			20-125			20-182			20-239	
	20-14			20-69			20-126			20-183			20-240	
	20-15			20-70			20-127			20-184			20-241	
	20-16			20-71			20-128			20-185			20-242	
	20-17			20-72			20-129			20-186			20-243	
	20-18			20-73			20-130			20-187			20-244	
	20-19			20-74			20-131			20-188			20-245	
	20-20			20-75			20-132			20-189			20-246	
	20-21			20-76			20-133			20-190			20-247	
	20-22			20-77			20-134			20-191			20-248	
	20-23			20-78			20-135			20-192			20-249	
	20-24			20-79			20-136			20-193			20-250	
	20-25			20-80			20-137			20-194			20-251	
	20-26			20-81			20-138			20-195			20-252	
	20-27			20-82			20-139			20-196			20-253	
	20-28			20-83			20-140			20-197			20-254	
	20-29			20-84			20-141			20-198			20-255	
	20-30			20-85			20-142			20-199			20-256	
	20-31			20-86			20-143			20-200			20-257	
	20-32			20-87			20-144			20-201			20-258	
	20-33			20-88			20-145			20-202			20-259	
	20-34			20-89			20-146			20-203			20-260	
	20-35			20-90			20-147			20-204			20-261	
	20-36			20-91			20-148			20-205			20-262	
	20-37			20-92			20-149			20-206			20-263	
	20-38			20-93			20-150			20-207			20-264	
	20-39			20-94			20-151			20-208				
	20-40			20-95			20-152			20-209			30-1	
	20-41			20-96			20-153			20-210			30-2	
	20-42			20-97			20-154			20-211			30-3	
	20-43			20-98			20-155			20-212			30-4	
	20-44			20-99			20-156			20-213			30-5	
	20-45			20-100			20-157			20-214			30-6	
	20-46			20-101			20-158			20-215			30-7	
	20-47			20-102			20-159			20-216			30-8	
	20-48			20-103			20-160			20-217			30-9	
	20-49			20-104			20-161			20-218			30-10	
	20-50			20-105			20-162			20-219			30-11	
	20-51			20-106			20-163			20-220			30-12	
	20-52			20-107			20-164			20-221			30-13	
	20-53			20-108			20-165			20-222			30-14	
	20-54			20-109			20-166			20-223			30-15	
	20-55			20-110			20-167			20-224			30-16	
	20-56			20-111			20-168			20-225			30-17	
	20-57			20-112			20-169			20-226			30-18	

Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision	Mark	Page	Time of revision
	30-19			30-73			30-127			30-181			40-22	
	30-20			30-74			30-128			30-182			40-23	
	30-21			30-75			30-129			30-183			40-24	
	30-22			30-76			30-130			30-184			40-25	
	30-23			30-77			30-131			30-185			40-26	
	30-24			30-78			30-132			30-186			40-27	
	30-25			30-79			30-133			30-187			40-28	
	30-26			30-80			30-134			30-188			40-29	
	30-27			30-81			30-135			30-189			40-30	
	30-28			30-82			30-136			30-190			40-31	
	30-29			30-83			30-137			30-191			40-32	
	30-30			30-84			30-138			30-192			40-33	
	30-31			30-85			30-139			30-193			40-34	
	30-32			30-86			30-140			30-194				
	30-33			30-87			30-141			30-195				
	30-34			30-88			30-142			30-196				
	30-35			30-89			30-143			30-197				
	30-36			30-90			30-144			30-198				
	30-37			30-91			30-145			30-199				
	30-38			30-92			30-146			30-200				
	30-39			30-93			30-147			30-201				
	30-40			30-94			30-148			30-202				
	30-41			30-95			30-149			30-203				
	30-42			30-96			30-150			30-204				
	30-43			30-97			30-151			30-205				
	30-44			30-98			30-152			30-206				
	30-45			30-99			30-153			30-207				
	30-46			30-100			30-154			30-208				
	30-47			30-101			30-155			30-209				
	30-48			30-102			30-156			30-210				
	30-49			30-103			30-157			30-211				
	30-50			30-104			30-158			30-212				
	30-51			30-105			30-159							
	30-52			30-106			30-160			40-1				
	30-53			30-107			30-161			40-2				
	30-54			30-108			30-162			40-3				
	30-55			30-109			30-163			40-4				
	30-56			30-110			30-164			40-5				
	30-57			30-111			30-165			40-6				
	30-58			30-112			30-166			40-7				
	30-59			30-113			30-167			40-8				
	30-60			30-114			30-168			40-9				
	30-61			30-115			30-169			40-10				
	30-62			30-116			30-170			40-11				
	30-63			30-117			30-171			40-12				
	30-64			30-118			30-172			40-13				
	30-65			30-119			30-173			40-14				
	30-66			30-120			30-174			40-15				
	30-67			30-121			30-175			40-16				
	30-68			30-122			30-176			40-17				
	30-69			30-123			30-177			40-18				
	30-70			30-124			30-178			40-19				
	30-71			30-125			30-179			40-20				
	30-72			30-126			30-180			40-21				

SAFETY

SAFETY NOTICE

IMPORTANT SAFETY NOTICE

Proper service and repairs extremely important for safe machine operation. The service and repair techniques recommended by Komatsu and described in this manual are both specially designed by Komatsu for the specific purpose.

To prevent injury to workers, the symbol  is used to mark safety precautions in this manual. The cautions accompanying these symbols should always be followed carefully. If any dangerous situation arises or may possibly arise, first consider safety, and take the necessary actions to deal with the situation.

GENERAL PRECAUTIONS

Mistakes in operation are extremely dangerous. Read the Operation and Maintenance carefully BEFORE operating the machine.

1. Before carrying out any greasing or repairs, read all the precautions given on the decals which are fixed to the machine.
2. When carrying out any operation, always wear safety shoes and helmet. Do not wear loose work clothes, or clothes with buttons missing.
 - Always wear safety glasses when hitting parts with a hammer.
 - Always wear safety glasses when grinding parts with a grinder, etc.
3. If welding repairs are needed, always have a trained, experienced welder carry out the work. When carrying out welding work, always wear welding gloves, apron, glasses, cap and other clothes suited for welding work.
4. When carrying out any operation with two or more workers, always agree on the operating procedure before starting. Always inform your fellow workers before starting any step of the operation. Before starting work, hang UNDER REPAIR signs on the controls in the operator's compartment.
5. Keep all tools in good condition and learn the correct way to use them.

6. Decide a place in the repair workshop to keep tools and removed parts. Always keep the tools and parts in their correct places. Always keep the work area clean and make sure that there is no dirt or oil on the floor. Smoke only in the areas provided for smoking. Never smoke while working.

PREPARATIONS FOR WORK.

7. Before adding the oil or making any repairs park the machine on hard, level ground, and block the wheels or tracks to prevent the machine from moving.
8. Before starting work, lower blade, ripper, bucket or any other work equipment to the ground. If this is not possible, insert the safety pin or use blocks to prevent the work equipment from falling. In addition, be sure to lock all the control levers and hang warning signs on them.
9. When disassembling or assembling, support the machine with blocks, jacks or stands before starting work.
10. Remove all mud and oil from the steps or other places used to get on and off the machine. Always use the handrails, ladders or steps when getting on or off the machine. Never jump on or off the machine. If it is impossible to use the handrails, ladders or steps, use a stand to provide safe footing.

PRECAUTIONS DURING WORK

11. When removing the oil filter cap, drain plug or hydraulic pressure measuring plugs, loosen them slowly to prevent the oil from spurting out. Before disconnecting or removing components of the oil, water or air circuits, first remove the pressure completely from the circuit.
12. The water and oil in the circuits are hot when the engine is stopped, so be careful not to get burned.
Wait for the oil and water to cool before carrying out any work on the oil or water circuits.
13. Before starting work, remove the leads from the battery. Always remove the lead from the negative (-) terminal first.
14. When raising heavy components, use a hoist or crane.
Check that the wire rope, chains and hooks are free from damage.
Always use lifting equipment which has ample capacity.
Install the lifting equipment at the correct places.
Use a hoist or crane and operate slowly to prevent the component from hitting any other part.
Do not work with any part still raised by the hoist or crane.
15. When removing covers which are under internal pressure or under pressure from a spring, always leave two bolts in position on opposite sides. Slowly release the pressure, then slowly loosen the bolts to remove.
16. When removing components, be careful not to break or damage the wiring. Damaged wiring may cause electrical fires.
17. When removing piping, stop the fuel or oil from spilling out. If any oil or fuel drops onto the floor, wipe it up immediately. Fuel or oil on the floor can cause you to slip, or can even start fires.
18. As a general rule, do not use gasoline to wash parts. In particular, only use the minimum of gasoline when washing electrical parts.
19. Be sure to assemble all parts again in their original places.
Replace any damaged parts with new parts.
 - When installing hoses and wires, be sure that they will not be damaged by contact with other parts when the machine is being operated.
20. When installing high pressure hoses, make sure that they are not twisted. Damaged tubes are dangerous, so be extremely careful when installing tubes for high pressure circuits. Also, check that connecting parts are correctly installed.
21. When assembling or installing parts, always use the specified tightening torques. When installing protective parts such as guards, or parts which vibrate violently or rotate at high speed, be particularly careful to check that they are installed correctly.
22. When aligning two holes, never insert your fingers or hand. Be careful not to get your fingers caught in a hole.
23. When measuring hydraulic pressure, check that the measuring tool is correctly assembled for taking any measurements.
24. Take care when removing or installing the tracks of track-type machines. When removing the track, the track separates suddenly, so never let anyone stand at either end of the track.

FOREWORD GENERAL

This shop manual has been prepared as an aid to improve the quality of repairs by giving the serviceman an accurate understanding of the product and by showing him the correct way to perform repairs and make judgments. Make sure you understand the contents of this manual and use it to full effect at every opportunity.

This shop manual mainly contains the necessary technical information for operations performed in a service workshop. For ease of understanding, the manual is divided into the following chapters: these chapters are further divided into the each main group of components.

STRUCTURE AND FUNCTION

This section explains the structure and function of each component. It serves not only to give an understanding of the structure, but also serves as reference material for troubleshooting.

TESTING AND ADJUSTING

This section explains checks to be made before and after performing repairs, as well as adjustments to be made at completion of the checks and repairs. Troubleshooting charts correlating "problems" to "Causes" are also included in this section.

DISASSEMBLY AND ASSEMBLY

This section explains the order to be followed when removing, installing, disassembling or assembling each component, as well as precautions to be taken for these operations.

MAINTENANCE STANDARD

This section gives the judgement standards when inspecting disassembled parts.

NOTICE

The specifications contained in this shop manual are subject to change at any time and without any advance notice. Use the specifications given in the book with the latest date.

HOW TO READ THE SHOP MANUAL

VOLUMES

Shop manuals are issued as a guide to carrying out repairs. They are divided as follows:

Chassis volume: Issued for every machine model

Engine model: Issued for each engine series

Electrical volume: } Each issued as one
Attachments volume: } volume to cover all
 models

These various volumes are designed to avoid duplicating the same information. Therefore, to deal with all repairs for any model, it is necessary that chassis, engine, electrical and attachment volumes be available.

DISTRIBUTION AND UPDATING

Any additions, amendments or other changes will be sent to KOMATSU distributors. Get the most up-to-date information before you start any work.

FILING METHOD

1. See the page number on the bottom of the page. File the pages in correct order.
2. Following examples show how to read the page number
 Example 1 (Chassis volume:)

10 - 3

Item number (10. Structure and Function)
 Consecutive page number for each item

Example 2 (Engine Volume:)

12 - 5

Unit number (1. Engine)
 Item number (2. Testing and Adjusting)
 Consecutive page number for each item

3. Additional pages: Additional pages are indicated by a hyphen (-) and number after the page number. File as in the example.

Example:

10-4		12-203
10-4-1	Added pages	12-203-1
10-4-2		12-203-2
10-5		12-204

REVISED EDITION MARK


When a manual is revised, an edition mark (1,2,3,...) is recorded on the bottom of the pages.

REVISIONS

Revised pages are shown in the LIST OF REVISED PAGES next to the CONTENTS page.

SYMBOLS

So that the shop manual can be of ample practical use, important safety and quality portions are marked with the following symbols.

Symbol	Item	Remarks
	Safety	Special safety precautions are necessary when performing the work.
	Caution	Special technical precautions or other precautions for preserving standards are necessary when performing the work.
	Weight	Weight of parts of systems. Caution necessary when selecting hoisting wire, or when working posture is important, etc.
	Tightening torque	Places that require special attention for the tightening torque during assembly.
	Coat	Places to be coated with adhesives and lubricants, etc.
	Oil, water	Places where oil, water or fuel must be added, and the capacity.
	Drain	Places where oil or water must be drained, and quantity to be drained.

HOISTING INSTRUCTIONS

HOISTING

⚠ Heavy parts (25 kg or more) must be lifted with a hoist, etc. In the **DISASSEMBLY AND ASSEMBLY** section, every part weighing 25 kg or more is indicated with the symbol

- If a part cannot be smoothly removed from the machine by hoisting, the following checks should be made:
 - 1) Check for removal of all bolts fastening the part to the relative parts.
 - 2) Check for existence of another part causing interference with the part to be removed.


WIRE ROPES

- 1) Use adequate ropes depending on the weight of parts to be hoisted, referring to the table below:

Wire ropes (Standard "Z" or "S" twist ropes without galvanizing)	
Rope diameter (mm)	Allowable load (tons)
10	1.0
11.2	1.4
12.5	1.6
14	2.2
16	2.8
18	3.6
20	4.4
22.4	5.6
30	10.0
40	18.0
50	28.0
60	40.0

- ★ The allowable load value is estimated to be one-sixth or one-seventh of the breaking strength of the rope used.
- 2) Sling wire ropes from the middle portion of the hook.

Slinging near the edge of the hook may cause the rope to slip off the hook during hoisting, and a serious accident can result. Hooks have a maximum strength at the middle portion.

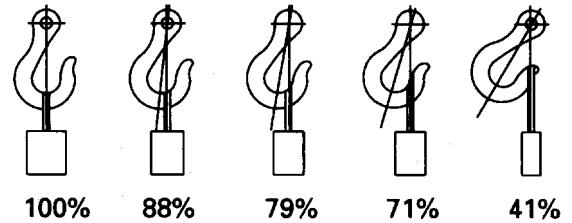


SAD00479

- 3) Do not sling a heavy load with one rope alone, but sling with two or more ropes symmetrically wound onto the load.

⚠ Slinging with one rope may cause turning of the load during hoisting, untwisting of the rope, or slipping of the rope from its original winding position on the load, which can result in a dangerous accident.

- 4) Do not sling a heavy load with ropes forming a wide hanging angle from the hook. When hoisting a load with two or more ropes, the force subjected to each rope will increase with the hanging angles. The table below shows the variation of allowable load (kg) when hoisting is made with two ropes, each of which is allowed to sling up to 1000 kg vertically, at various hanging angles.

When two ropes sling a load vertically, up to 2000 kg of total weight can be suspended. This weight becomes 1000 kg when two ropes make a 120° hanging angle. On the other hand, two ropes are subjected to an excessive force as large as 4000 kg if they sling a 2000 kg load at a lifting angle of 150°.

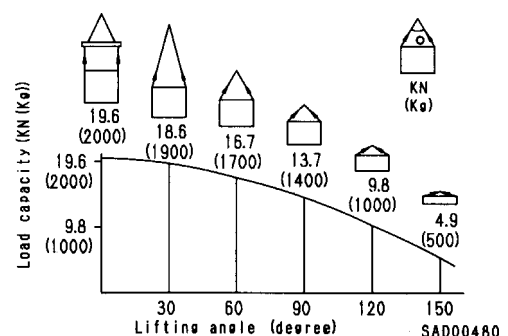

COATING MATERIALS

The recommended coating materials prescribed in Komatsu Shop Manuals are listed below.

Category	Komatsu code	Part No.	Q'ty	Container	Main applications, features
Adhesive	LT-1A	790-129-9030	150 g	Tube	Used to prevent rubber gaskets, rubber cushions, and cork plugs from coming out
	LT-1B	790-129-9050	20 g (x2)	Plastic container	Used in places requiring an immediately effective, strong adhesive. Used for plastics (except polyethylene, polypropylene, tetrafluoroethylene and vinyl chloride), rubber, metal, and non-metal.
	LT-2	09940-00030	50 g	Plastic container	- Features: resistance to heat, chemicals - Used for anti-loosening and sealant purposes for bolts and plugs
	LT-3	790-129-9060 (Set of adhesive and hardening agent)	Adhesive : 1 kg Hardening agent : 500 g	Can	Used as adhesive or sealant for metal, glass, plastic
	LT-4		250 g	Plastic container	Used as sealant for machined holes
	(Loctite 648-50)	790-129-9040	50 cc	-	- Features: Resistance to heat, chemicals - Used at joint portions subject to high temperature
Gasket sealant	LG-1	79A-129-9110	200 g	Tube	Used as adhesive or sealant for gaskets and packings of power train case, etc.
	LG-3	790-129-9070	1kg	Can	- Features: Resistance to heat - Used as sealant for flange surfaces and bolts at high temperature locations, used to prevent seizure - Used as sealant for heat resistant gasket for high temperature locations such as engine precombustion chamber, exhaust pipe
	LG-4	790-120-9020	200 g	Tube	- Features: Resistance to water, oil - Used as sealant for flange surface, thread - Also possible to use as sealant for flanges with large clearance - Used as sealant for mating surfaces of final drive case, transmission case.
	LG-5	790-129-9080	1 kg	Plastic container	- Used as sealant for various threads, pipe joints, flanges - Used as sealant for tapered plugs, elbows, nipples of hydraulic piping
	LG-6	09940-00011	250 g	Tube	- Features: Silicon based, resistance to heat, cold - Used as sealant for flange surface, thread - Used as sealant for oil pan, final drive case, etc.
	LG-7	09920-00150	150 g	Tube	- Features: Silicon based, quick hardening type - Used as sealant for flywheel housing, intake manifold, oil pan, thermostat housing, etc.
Rust prevention lubricant	-	09940-00051	60 g	Can	Used as lubricant for sliding parts (to prevent squeaking)
Molybdenum disulphide lubricant	-	09940-00040	200 g	Tube	- Used to prevent seizure or scuffing of the thread when press fitting or shrink fitting - Used as lubricant for linkage, bearings, etc.
Lithium grease	G2-LI	SYG350LI SYG-400LI SYG-400LI-A SYG-160LI SYGA-160CNLI	Various	Various	General purpose type
Calcium grease	G2-CA	SSG2-400CA SYG2-350CA SYG2-400CA-A SYG2-160CA SYGA-16NCA	Various	Various	Used for normal temperature, light load bearing at places in contact with water or steam
Molybdenum disulphide grease	-	SYG2-400M	400 g (10 per case)	Bellows type	Used for places with heavy load

STANDARD TIGHTENING TORQUE

STANDARD TIGHTENING TORQUES OF BOLTS AND NUTS

The following charts give the standard tightening torques of bolts and nuts. Exceptions are given in section of **DISASSEMBLY AND ASSEMBLY**.

1 Kgm = 9.806 Nm


Thread diameter of bolt	Width across flats	 SAD00481	 SAD00482
		kgm	Nm
6	10	1.35 ± 0.15	13.2 ± 1.4
8	13	3.2 ± 0.3	31.4 ± 2.9
10	17	6.7 ± 0.7	65.7 ± 6.8
12	19	11.5 ± 1.0	112 ± 9.8
14	22	18.0 ± 2.0	177 ± 19
16	24	28.5 ± 3	279 ± 29
18	27	39 ± 4	383 ± 39
20	30	56 ± 6	549 ± 58
22	32	76 ± 8	745 ± 78
24	36	94.5 ± 10	927 ± 98
27	41	135 ± 15	1320 ± 140
30	46	175 ± 20	1720 ± 190
33	50	225 ± 25	2210 ± 240
36	55	280 ± 30	2750 ± 290
39	60	335 ± 25	3280 ± 340

- ★ This torque table does not apply to the bolts with nylon packaging or other nonferrous metal washers are to be used, or which require tightening to otherwise specified torque.

TIGHTENING TORQUE OF SPLIT FLANGE BOLTS

Use these torques for split flange bolts.

Thread daimeter of bolt	Width across flats	Tightening torque	
mm	mm	kgm	Nm
10	14	6.7 ± 0.7	65.7 ± 6.8
12	17	11.5 ± 1	112 ± 9.8
16	22	28.5 ± 3	279 ± 29



SAD00483

TIGHTENING TORQUE FOR FLRED NUTS

Use these torques for flared part of nut.

Thread daimeter of bolt	Width across flats	Tightening torque	
mm	mm	kgm	Nm
14	19	2.5 ± 0.5	24.5 ± 4.9
18	24	5 ± 2	49 ± 19.6
22	27	8 ± 2	78.5 ± 19.6
24	32	14 ± 3	137.3 ± 29.4
30	36	18 ± 3	176.5 ± 29.4
33	41	20 ± 5	196.1 ± 49
36	46	25 ± 5	245.2 ± 49
42	55	30 ± 5	294.2 ± 49

ELECTRIC WIRE CODE

In the wiring diagrams, various colors and symbols are employed to indicate the thickness of wires. This wire code table will help you understand WIRING DIAGRAMS.

Example: 5WB indicates a cable having a nominal number 5 and white coating with black stripe.

CLASSIFICATION BY THICKNESS

Nominal number	Copper wire			Cable O.D. (mm)	Current rating (A)	Applicable circuit
	Number of strands	Dia. of strands (mm)	Cross section (mm ²)			
0.85	11	0.32	0.88	2.4	12	Starting, lighting, signal etc.
2	26	0.32	2.09	3.1	20	Lighting, signal etc.
5	65	0.32	5.23	4.6	37	Charging and signal
15	84	0.45	13.36	7.0	59	Starting (Glow plug)
40	85	0.80	42.73	11.4	135	Starting
60	127	0.80	63.84	13.6	178	Starting
100	217	0.80	109.1	17.6	230	Starting

CLASSIFICATION BY COLOR AND CODE

Priority	Circuits		Charging	Ground	Starting	Lighting	Instrument	Signal	Other
	Clas-sification								
1	Pri-mary	Code	W	B	B	R	Y	G	L
		Color	White	Black	Black	Red	Yellow	Green	Blue
2	Auxi-liary	Code	WR	-	BW	RW	YR	GW	LW
		Color	White & Red	-	Black & White	Red & White	Yellow & Red	Green & White	Blue & White
3		Code	WB	-	BY	RB	YB	GR	LR
		Color	White & Black	-	Black & Yellow	Red & Black	Yellow & Black	Green & Red	Blue & Red
4		Code	WL	-	BR	RY	YG	GY	LY
		Color	White & Blue	-	Black & Red	Red & Yellow	Yellow & Green	Green & Yellow	Blue & Yellow
5		Code	WG	-	-	RG	YL	GB	LBB
		Color	White & Green	-	-	Red & Green	Yellow & Blue	Green & Black	Blue & Black
6		Code	-	-	-	RL	YW	GL	-
		Color	-	-	-	Red & Blue	Yellow & White	Green & Blue	-

CONVERSION TABLE

METHOD OF USING THE CONVERSION TABLE

The Conversion Table in this section is provided to enable simple conversion of figures. For details of the method of using the Conversion Table, see the example given below.

EXAMPLE

- Method of using the Conversion Table to convert from millimeters to inches
- Convert 55 mm to inches
 - Locate the number 50 in the vertical column at the left side, take this as ①, then draw a horizontal line from ①.
 - Locate the number 5 in the row across the top, take this as ②, then draw a perpendicular line down from ②.
 - Take the point where the two lines cross as ③. This point ③ gives the value when converting from millimeters to inches. Therefore, 55mm = 2.165 inches.
 - Convert 550 mm into inches.
 - The number 550 does not appear in the table, so divide by 10 (move the decimal point one place to the left) to convert it to 55 mm.
 - Carry out the same procedure as above to convert 55 mm to 2.165 inches.
 - The original value (550 mm) was divided by 10, so multiply 2.165 inches by 10 (move the decimal point one place to the right) to return to the original value. This gives 550 mm = 21.65 inches.

②

1 mm = 0.03937 in

Millimeters to inches										
	0	1	2	3	4	5	6	7	8	9
0	0	0.039	0.079	0.118	0.157	0.197	0.236	0.276	0.315	0.354
10	0.394	0.433	0.472	0.512	0.551	0.591	0.630	0.669	0.709	0.748
20	0.787	0.827	0.866	0.906	0.945	0.984	1.024	1.063	1.102	1.142
30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.536
40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
① — 50	1.969	2.008	2.047	2.087	2.126	2.165	2.205	2.244	2.283	2.323
60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.717
70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.032	3.071	3.110
80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

Millimeters to Inches

1 mm = 0.03937 in

	0	1	2	3	4	5	6	7	8	9
0	0	0.039	0.079	0.118	0.157	0.197	0.236	0.276	0.315	0.354
10	0.394	0.433	0.472	0.512	0.551	0.591	0.630	0.669	0.709	0.748
20	0.787	0.827	0.866	0.906	0.945	0.984	1.024	1.063	1.102	1.142
30	1.181	1.220	1.260	1.299	1.339	1.378	1.417	1.457	1.496	1.536
40	1.575	1.614	1.654	1.693	1.732	1.772	1.811	1.850	1.890	1.929
50	1.969	2.008	2.047	2.087	2.126	2.165	2.205	2.244	2.283	2.323
60	2.362	2.402	2.441	2.480	2.520	2.559	2.598	2.638	2.677	2.712
70	2.756	2.795	2.835	2.874	2.913	2.953	2.992	3.032	3.071	3.110
80	3.150	3.189	3.228	3.268	3.307	3.346	3.386	3.425	3.465	3.504
90	3.543	3.583	3.622	3.661	3.701	3.740	3.780	3.819	3.858	3.898

Kilogram to Pound

1kg = 2.2046 lb

	0	1	2	3	4	5	6	7	8	9
0	0	2.20	4.41	6.61	8.82	11.02	13.23	15.43	17.64	19.84
10	22.05	24.25	26.46	28.66	30.86	33.07	35.27	37.48	39.68	41.89
20	44.09	46.30	48.50	50.71	51.91	55.12	57.32	59.53	61.73	63.93
30	66.14	68.34	70.55	72.75	74.96	77.16	79.37	81.57	83.78	85.98
40	88.18	90.39	92.59	94.80	97.00	99.21	101.41	103.62	105.82	108.03
50	110.23	112.44	114.64	116.85	119.05	121.25	123.46	135.66	127.87	130.07
60	132.28	134.48	136.69	138.89	141.10	143.30	145.51	147.71	149.91	152.12
70	154.32	156.53	158.73	160.94	163.14	165.35	167.55	169.76	171.96	174.17
80	176.37	178.57	180.78	182.98	185.19	187.39	189.60	191.80	194.01	196.21
90	198.42	200.62	202.03	205.03	207.24	209.44	211.64	213.85	216.05	218.26

Litre to U.S. Gallon

1/ = 0.2642 U.S. Gal

	0	1	2	3	4	5	6	7	8	9
0	0	0.264	0.528	0.793	1.057	1.321	1.585	1.849	2.113	2.378
10	2.642	2.906	3.170	3.434	3.698	3.963	4.227	4.491	4.755	5.019
20	5.283	5.548	5.812	6.076	6.3340	6.604	6.869	7.133	7.397	7.661
30	7.925	8.189	8.454	8.718	8.982	9.246	9.510	9.774	10.039	10.303
40	10.567	10.831	11.095	11.359	11.624	11.888	12.152	12.416	12.680	12.944
50	13.209	13.473	13.737	14.001	14.265	14.529	14.795	15.058	15.322	15.586
60	15.850	16.115	16.379	16.643	16.907	17.171	17.435	17.700	17.964	18.228
70	18.492	18.756	19.020	19.285	19.549	19.813	20.077	20.341	20.605	20.870
80	21.134	21.398	21.662	21.926	22.190	22.455	22.719	22.983	23.247	23.511
90	23.775	24.040	24.304	24.568	24.832	25.096	25.361	25.625	25.889	26.153

Litre to U.K. Gallon

1/ = 0.21997 U.K. Gal

	0	1	2	3	4	5	6	7	8	9
0	0	0.220	0.440	0.660	0.880	1.100	1.320	1.540	1.760	1.980
10	2.200	2.420	2.640	2.860	3.080	3.300	35.20	3.740	3.950	4.179
20	4.399	4.619	4.839	5.059	5.279	5.499	5.719	5.939	6.159	6379
30	6.599	6.819	7.039	7.259	7.479	7.969	7.919	8.139	8.359	8.579
40	8.799	9.019	9.239	9.459	9.679	9.899	10.119	10.339	10.559	10.778
50	10.998	11.281	11.438	11.658	11.878	12.098	12.318	12.528	12.758	12.978
60	13.198	13.418	13.638	13.858	14.078	14.298	14.518	14.738	14.958	15.178
70	15.398	15.618	15.838	16.058	16.278	16.498	16.718	16.938	17.158	17.378
80	17.598	17.818	18.037	18.257	18.477	18.697	18.917	19.137	19.357	19.577
90	19.797	20.017	20.237	20.457	20.677	20.897	21.117	21.337	21.557	21.777

kgm to ft. lb

1 kgm = 7.233 ft. lb

	0	1	2	3	4	5	6	7	8	9
0	0	7.2	14.5	21.7	28.9	36.2	43.4	50.6	57.9	65.1
10	72.3	79.6	86.8	94.0	101.3	108.5	115.7	123.0	130.2	137.4
20	144.7	151.9	159.1	166.4	173.6	180.8	188.1	195.3	202.5	209.8
30	217.0	224.2	231.5	238.7	245.9	253.2	260.4	267.6	274.9	282.1
40	289.3	296.6	303.8	311.0	318.3	325.5	332.7	340.0	347.2	354.4
50	361.7	368.9	376.1	383.4	390.6	397.8	405.1	412.3	419.5	426.8
60	434.0	441.2	448.5	455.7	462.9	470.2	477.4	484.6	491.8	499.1
70	506.3	513.5	520.8	528.0	535.2	542.5	549.7	556.9	564.2	571.4
80	578.6	585.9	593.1	600.3	607.6	614.8	622.0	629.3	636.5	643.7
90	651.0	658.2	665.4	672.7	679.9	687.1	694.4	701.6	708.8	716.1
100	723.3	730.5	737.8	745.0	752.2	759.5	766.7	773.9	781.2	788.4
110	795.6	802.9	810.1	817.3	824.6	831.8	839.0	846.3	853.5	860.7
120	868.0	875.2	882.4	889.7	896.9	904.1	911.4	918.6	925.8	933.1
130	940.3	947.5	954.8	962.0	969.2	976.5	983.7	990.9	998.2	1005.4
140	1012.6	1019.9	1027.1	1034.3	1041.5	1048.8	1056.0	1063.2	1070.5	1077.7
150	1084.9	1092.2	1099.4	1106.6	1113.9	1121.1	1128.3	1135.6	1142.8	1150.0
160	1157.3	1164.5	1171.7	1179.0	1186.2	1193.4	1200.7	1207.9	1215.1	1222.4
170	1129.6	1236.8	1244.1	1251.3	1258.5	1265.8	1273.0	1280.1	1287.5	1294.7
180	1301.9	1309.2	1316.4	1323.6	1330.9	1338.1	1245.3	1352.6	1359.8	1367.0
190	1374.3	1381.5	1388.7	1396.0	1403.2	1410.4	1417.7	1424.9	1432.1	1439.4

kg/cm² to lb/in²

1 kg/cm² = 14.2233 lb/in²

	0	1	2	3	4	5	6	7	8	9
0	0	14.2	28.4	42.7	56.9	71.1	85.3	99.6	113.8	128.0
10	142.2	156.5	170.7	184.9	199.1	213.4	227.6	241.8	256.0	270.2
20	284.5	298.7	312.9	327.1	341.4	355.6	369.8	384.0	398.3	412.5
30	426.7	440.9	455.1	469.4	483.6	497.8	512.0	526.3	540.5	554.7
40	568.9	583.2	597.4	611.6	625.8	640.1	654.3	668.5	682.7	696.9
50	711.2	725.4	739.6	753.8	768.1	782.3	796.5	810.7	825.0	839.2
60	853.4	867.6	881.8	896.1	910.3	924.5	938.7	953.0	967.2	981.4
70	995.6	1010	1024	1038	1053	1067	1081	1095	1109	1124
80	1138	1152	1166	1181	1195	1209	1223	1237	1252	1266
90	1280	1294	1309	1323	1337	1351	1365	1380	1394	1408
100	1422	1437	1451	1465	1479	1493	1508	1522	1536	1550
110	1565	1579	1593	1607	1621	1636	1650	1664	1678	1693
120	1707	1721	1735	1749	1764	1778	1792	1806	1821	1835
130	1849	1863	1877	1892	1906	1920	1934	1949	1963	1977
140	1991	2005	2020	2034	2048	2062	2077	2091	2105	2119
150	2134	2148	2162	2176	2190	2205	2219	2233	2247	2262
160	2276	2290	2304	2318	2333	2347	2361	2375	2389	2404
170	2418	2432	2446	2460	2475	2489	2503	2518	2532	2546
180	2560	2574	2589	2603	1617	2631	2646	2660	2674	2688
190	2702	2717	2731	2745	2759	2773	2788	2802	2816	2830
200	2845	2859	2873	2887	2901	2916	2930	2944	2958	2973
210	2987	3001	3015	3030	3044	3058	3072	3086	3101	3115
220	3129	3143	3158	3172	3186	3200	3214	3229	3243	3257
230	3271	3286	3300	3314	3328	3343	3357	4471	3385	3399
240	3414	3428	3442	3456	3470	3485	3499	3513	3527	3542

Temperature

Fahrenheit-Centigrade Conversion; a simple way to convert a Fahrenheit temperature reading into a Centigrade temperature reading or vice is to enter the accompanying table in the center or boldface column of figures.

These figures refer to the temperature in either Fahrenheit or Centigrade degrees.

If it desired to convert from Fahrenheit to Centigrade degrees, consider the center column as a table of Fahrenheit temperatures and read the corresponding Centigrade temperature in the column at the left.

If it is desired to convert from Centigrade to Fahrenheit degrees, consider the center column as a table of Centigrade values, and read the corresponding Fahrenheit temperature on the right.





$$1^{\circ}\text{C} = 33.8^{\circ}\text{F}$$

°C		°F	°C		°F	°C		°F	°C		°F
-40.4	-40	-40.0	-11.7	11	51.8	7.8	46	114.8	27.2	81	117.8
-37.2	-35	-31.0	-11.1	12	53.6	8.3	47	116.6	27.8	82	179.6
-34.4	-30	-22.0	-10.6	13	55.4	8.9	48	118.4	28.3	83	181.4
-31.7	-25	-13.0	-10.0	14	57.2	9.4	49	120.2	28.9	84	183.2
-28.9	-20	-4.0	-9.4	15	59.0	10.0	50	122.0	29.4	85	185.0
-28.3	-19	-2.2	-8.9	16	60.8	10.6	51	123.8	30.0	86	186.8
-27.8	-18	-0.4	-8.3	17	62.6	11.1	52	125.6	30.6	87	188.6
-27.2	-17	1.4	-7.8	18	64.4	11.7	53	127.4	31.1	88	190.4
-26.7	-16	3.2	-7.2	19	66.2	12.2	54	129.2	31.7	89	192.2
-26.1	-15	5.0	-6.7	20	68.0	12.8	55	131.0	32.2	90	194.0
-25.6	-14	6.8	-6.1	21	69.8	13.3	56	132.8	32.8	91	195.8
-25.0	-13	8.6	-5.6	22	71.6	13.9	57	134.6	33.3	92	197.6
-24.4	-12	10.4	-5.0	23	73.4	14.4	58	136.4	33.9	03	199.4
-23.9	-11	12.2	-4.4	24	73.4	15.0	59	138.2	34.4	94	201.2
-23.3	-10	14.0	-3.9	25	75.2	15.6	60	140.0	35.0	95	203.0
-22.8	-9	15.8	-3.3	26	77.0	16.1	61	141.8	35.6	96	204.8
-22.2	-8	17.6	-2.8	27	78.8	16.7	62	143.6	36.1	97	206.6
-21.7	-7	19.4	-2.2	28	80.6	17.2	63	145.4	36.7	98	208.4
-21.1	-6	21.2	-1.7	29	82.4	17.8	64	147.2	37.2	99	210.2
-20.6	-5	23.0	-1.1	30	86.0	18.3	65	149.0	37.8	100	212.0
-20.0	-4	24.8	-0.6	31	87.8	18.9	66	150.8	40.6	105	221.0
-19.4	-3	26.6	0	32	89.6	19.4	67	152.6	43.3	110	230.0
-18.9	-2	28.4	0.6	33	91.4	20.0	68	154.4	46.1	115	239.0
-18.3	-1	30.2	1.1	34	93.2	20.6	69	156.2	48.9	120	248.0
-17.8	0	32.0	1.7	35	95.0	21.1	70	158.0	51.7	125	257.0
-17.2	1	33.8	2.2	36	96.8	21.7	71	159.8	54.4	130	266.0
-16.7	2	35.6	2.8	37	98.6	22.2	72	161.6	57.2	135	275.0
-16.1	3	37.4	3.3	38	100.4	22.8	73	163.4	60.0	140	284.0
-15.6	4	39.2	3.9	39	102.2	23.3	74	165.2	62.7	145	293.0
-15.0	5	41.0	4.4	40	104.0	23.9	75	167.0	65.6	150	302.0
-14.4	6	42.8	5.0	41	105.8	24.4	76	168.8	68.3	155	311.0
-13.9	7	44.6	5.6	42	107.6	25.0	77	170.6	71.1	160	320.0
-13.3	8	46.4	6.1	43	109.4	25.6	78	172.4	73.9	165	329.0
-12.8	9	48.2	6.7	44	111.2	26.1	79	174.2	76.7	170	338.0
-12.2	10	50.0	7.2	45	113.0	26.7	80	176.0	79.4	175	347.0

10 STRUCTURE AND FUNCTION

Engine related parts	10-2
Radiator, oil cooler, aftercooler	10-3
Power train	10-4
Swing circle	10-5
Swing machinery	10-6
Undercarriage	10-9
Clutch control circuit	10-9A
Axle	10-10
Suspension Lock Cylinder	10-14
Braking train	10-16
Brake pedal	10-17
Brake valve	10-18
Accumulator For Brake System	10-19
Steering train	10-20
Steering column	10-22
Hydraulic circuit diagram	10-23
Hydraulic tank	10-24
Hydraulic pump	10-25
Control valve	10-32
CLSS	10-38
Swing motor	10-69
Center swivel joint	10-72
Travel motor (Front, Rear)	10-73
Work equipment, swing PPC valve	10-78
Travel PPC valve	10-82
Service PPC valve	10-85
Safety lock switch	10-88
PPC manifold block	10-89
PPC manifold block pressure switches	10-90
Solenoid valve	10-91
Boom safety valve	10-100
Hydraulic cylinder	10-103
Work equipment	10-107
Electrical wiring diagram	10-109
.....	10-111
Engine control system	10-113
Electronic control system	10-119
Machine monitor system	10-142
Overload warning device	10-149
Breaker mode hydraulic performance	10-150


ENGINE RELATED PARTS

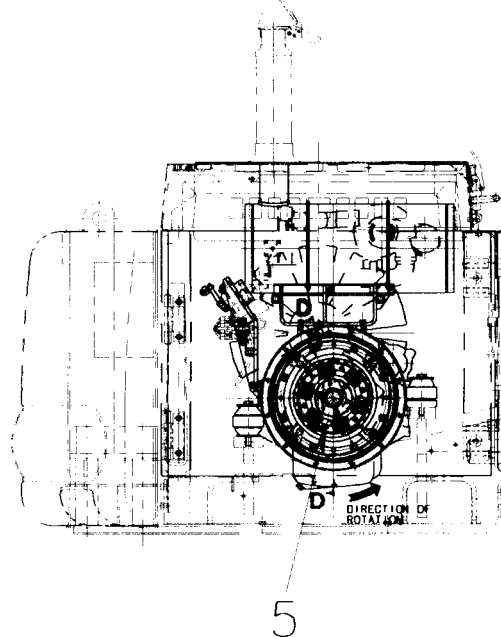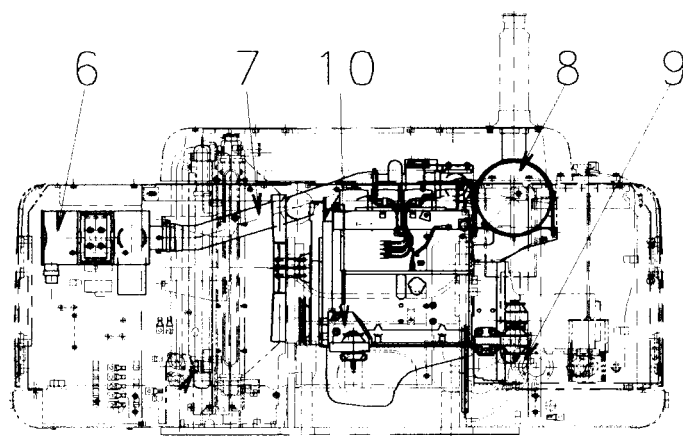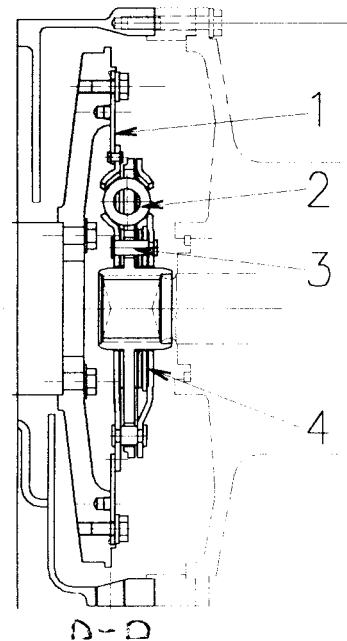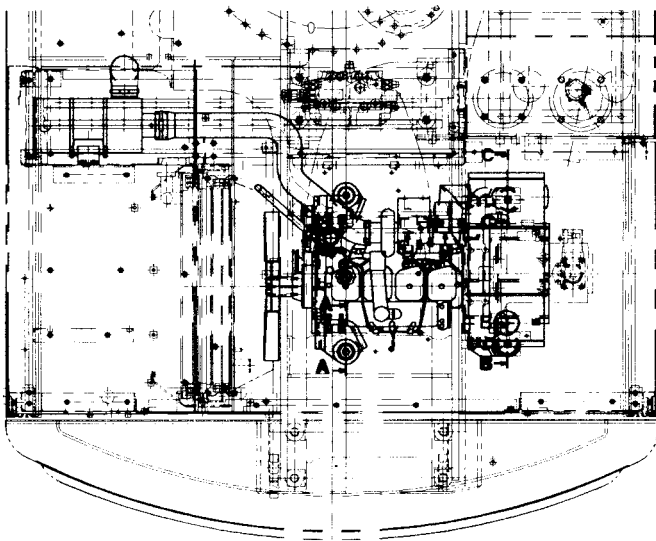

1. Drive plate
2. Torsion spring
3. Stopper pin
4. Friction plate
5. Damper assembly
6. Air cleaner
7. Intake connector
8. Muffler
9. Rear engine mount
10. Front engine mount

OUTLINE

- The damper assembly is a dry type.


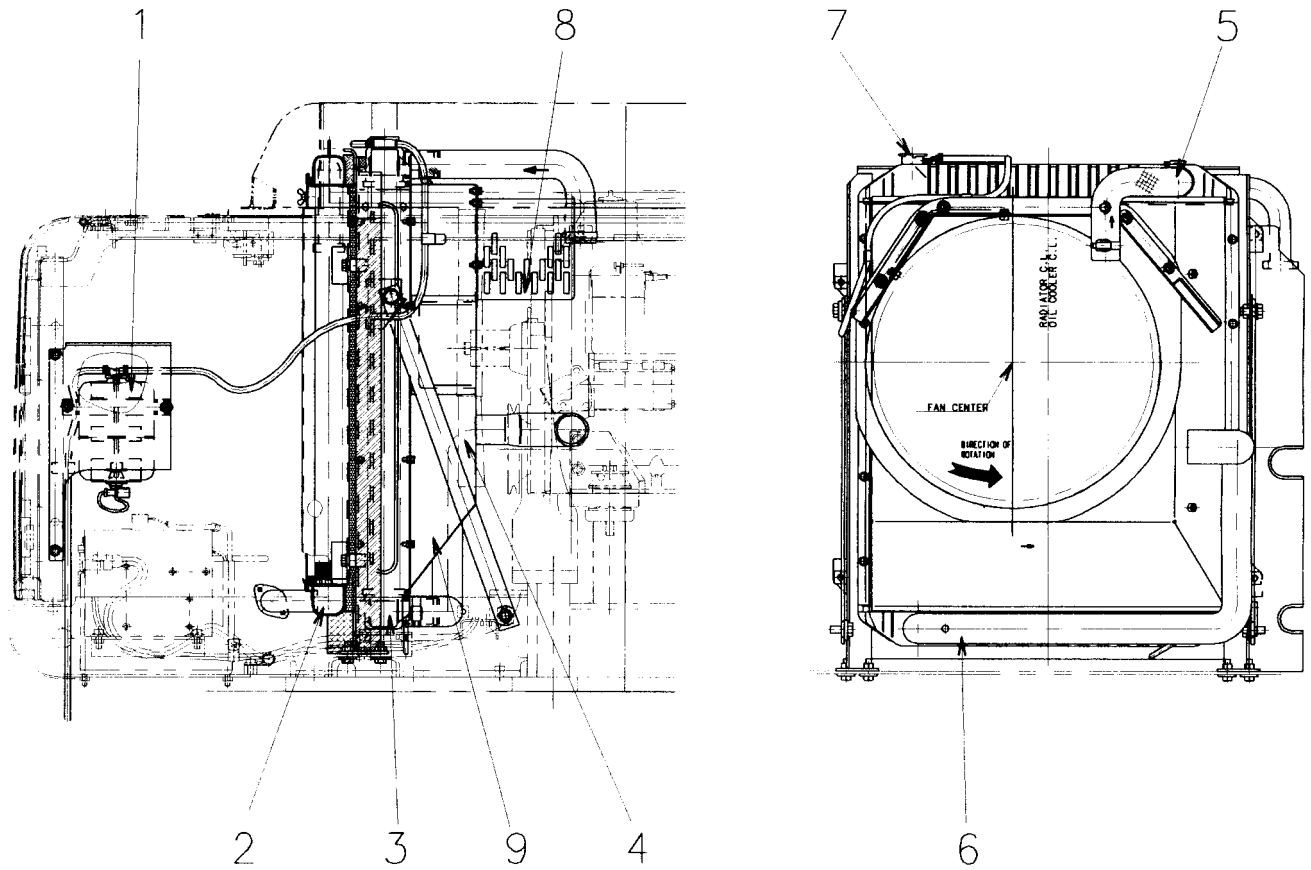
RADIATOR • OIL COOLER

1. Reservoir tank
2. Oil cooler
3. Radiator
4. Fan
5. Radiator inlet hose
6. Radiator outlet hose
7. Radiator cap
8. Net
9. Shroud

SPECIFICATIONS

Radiator: CWX-4


Oil cooler: SF-3

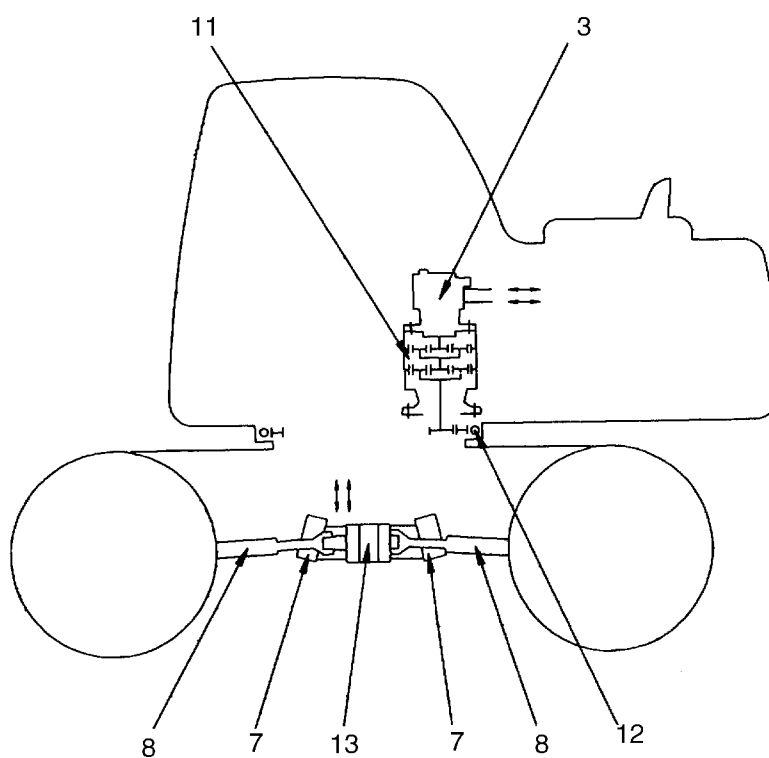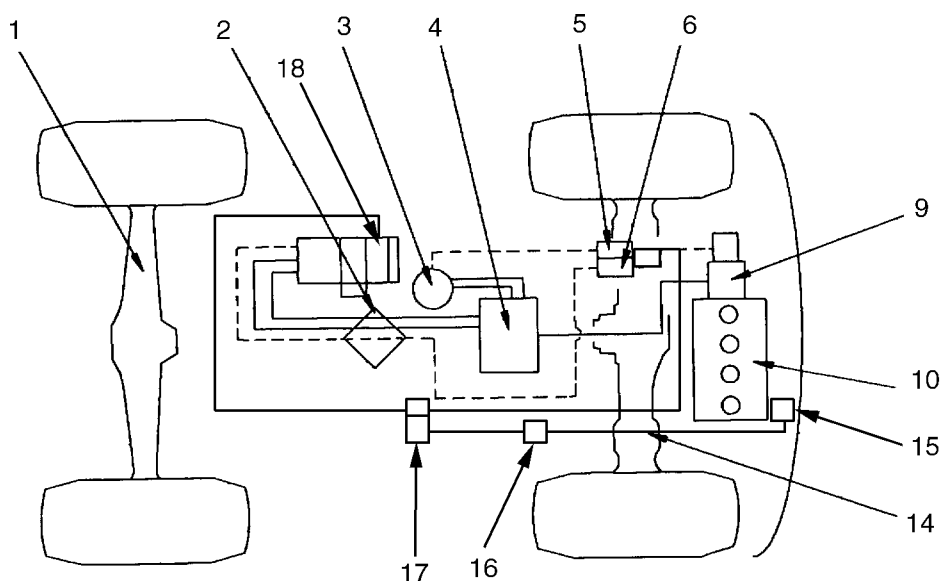

KW130P6001

- | | |
|--------------------------------|-----------------------|
| 1. Front axle | 10. Engine |
| 2. Center swivel joint | 11. Swing machinery |
| 3. Swing motor | 12. Swing circle |
| 4. Control valve | 13. Transmission |
| 5. Swing brake solenoid valve | 14. Rear axle |
| 6. Travel speed solenoid valve | 15. Gear pump |
| 7. Travel motor | 16. Priority valve |
| 8. Propshaft | 17. Power brake valve |
| 9. Hydraulic pump | 18. Clutch |

SWING CIRCLE

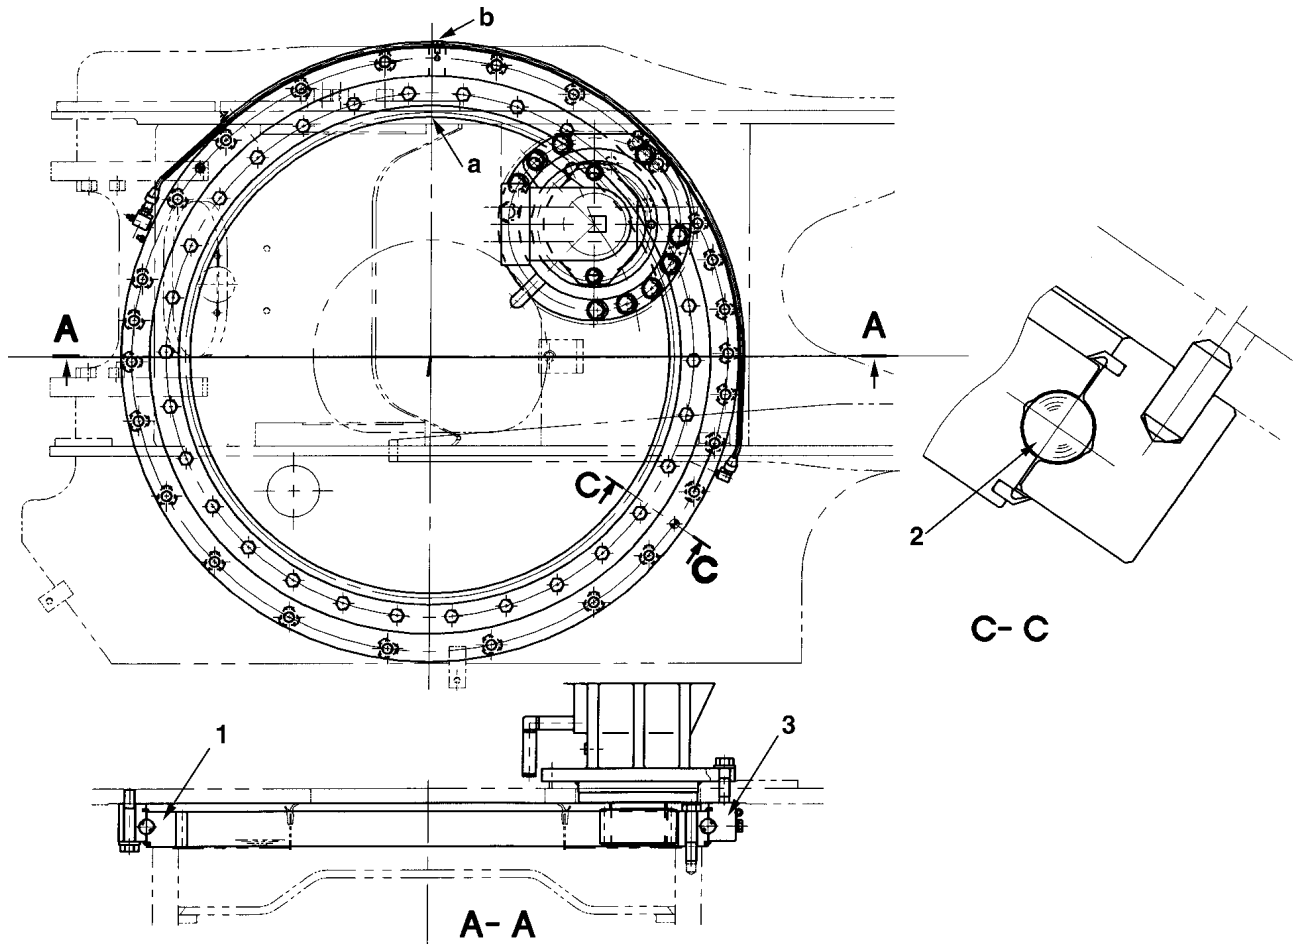


1. Swing circle inner race (No. of teeth: 94)
 2. Ball
 3. Swing circle outer race
- a. Inner race soft zone **S** position
 b. Outer race soft zone **S** position

SPECIFICATIONS


reduction ratio: $\frac{94}{12} = 7.833$

amount of grease: 8/(G2-LI)

SWING MACHINERY

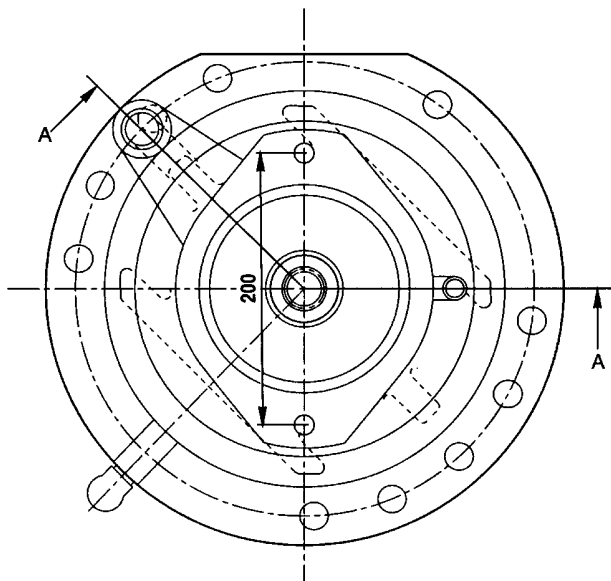

1. Swing pinion (No. of teeth: 12)
2. Cover
3. Case
4. No. 2 of planetary carrier
5. No. 2 sun gear (No. of teeth: 24)
6. No. 2 ring gear (No. of teeth: 78)
7. Case
8. No. 1 ring gear (No. of teeth: 78)
9. No. 1 sun gear (No. of teeth: 18)
10. Retainer
11. Oil level gauge
12. Cover
13. No. 1 planetary gear (No. of teeth: 29)
14. No. 1 planetary carrier
15. Coupling
16. No. 2 planetary gear (No. of teeth: 26)
17. Drain plug
18. Breather
19. Parking brake piston
20. Parking brake spring
21. Parking brake disc
22. Parking brake plate
23. Gauge rod

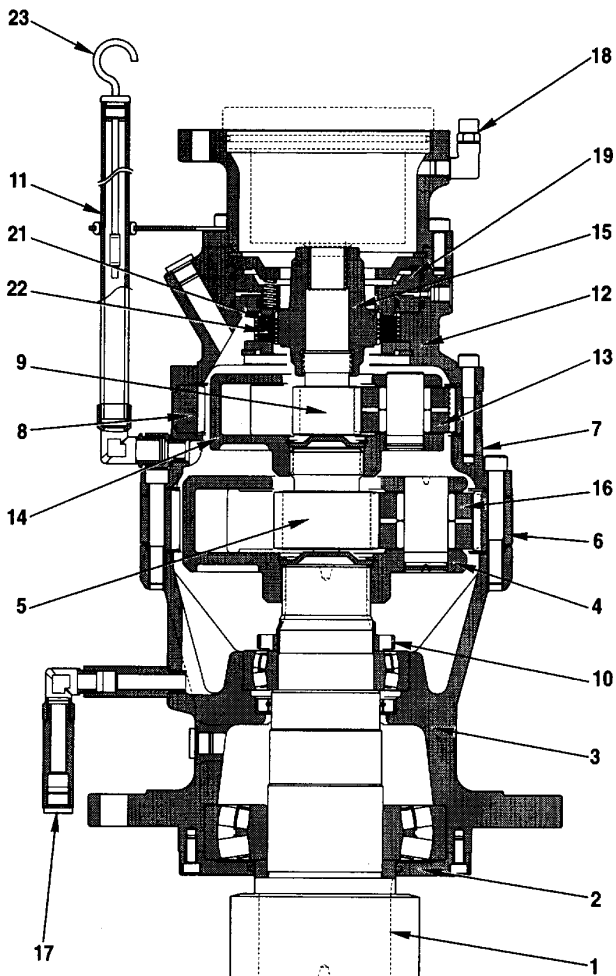

SPECIFICATIONS

$$\text{reduction ratio: } \frac{24+78}{24} \times \frac{18+78}{18} = 22.667$$


SWING HOLDING BRAKE

OPERATION

1) When swing brake solenoid valve is deactivated

When the swing brake solenoid is deactivated, the pressurized oil from the PPC pressure reducing valve is shut off and port **B** is connected to the tank circuit.


Because of this, brake piston (2) is pushed down in the direction of the arrow by brake spring (1), so disc (3) and plate (4) are pushed together and the brake is applied.

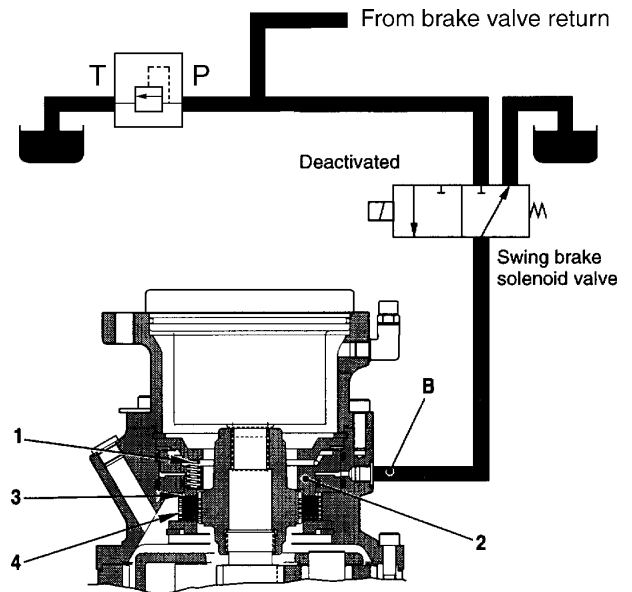

2) When swing brake solenoid valve is excited



When the swing solenoid valve is excited, the valve is switched, and the pressurized oil from the PPC pressure reducing valve enters port **B** and flows to brake chamber "a".

The pressurized oil entering chamber "a" overcomes the force of brake spring (1), and brake piston (2) is pushed up in the direction of the arrow. Because of this, disc (3) and plate (4) separate, and the brake is released.

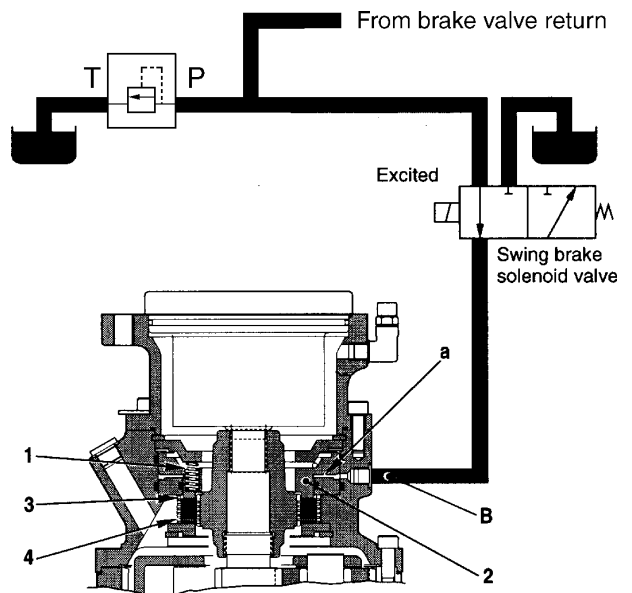

1. Brake spring
2. Brake piston
3. Disc
4. Plate

UNDERCARRIAGE

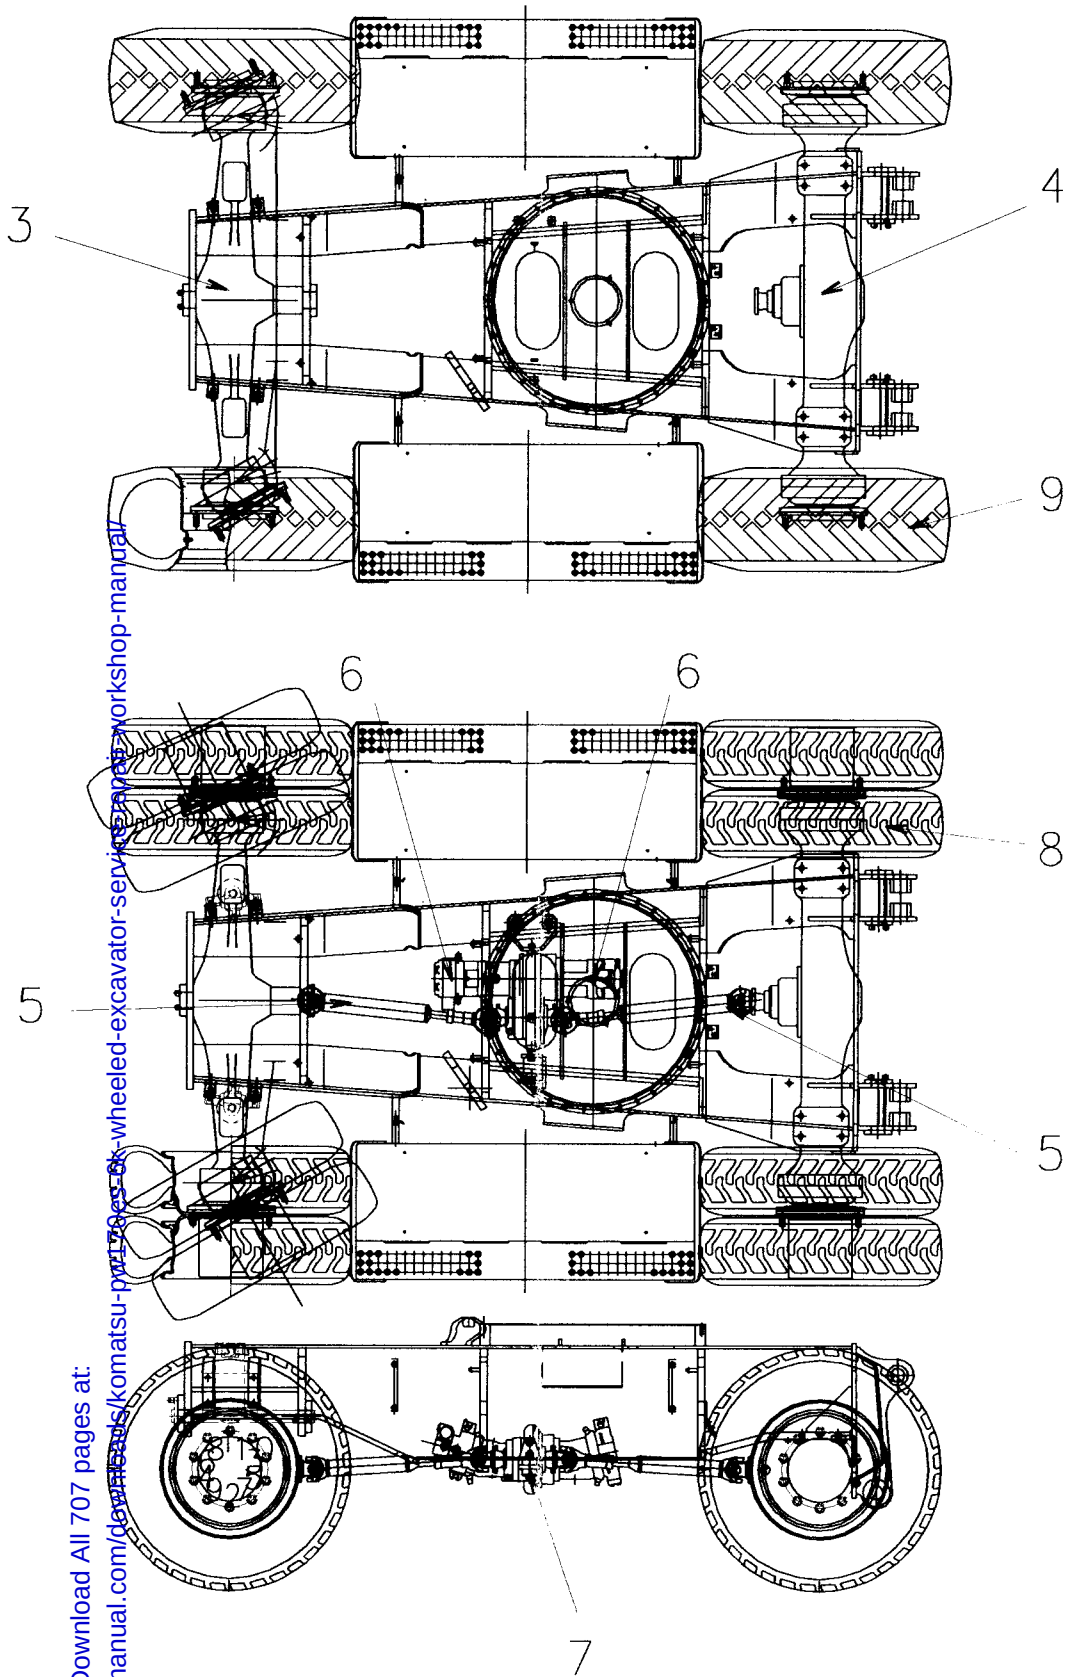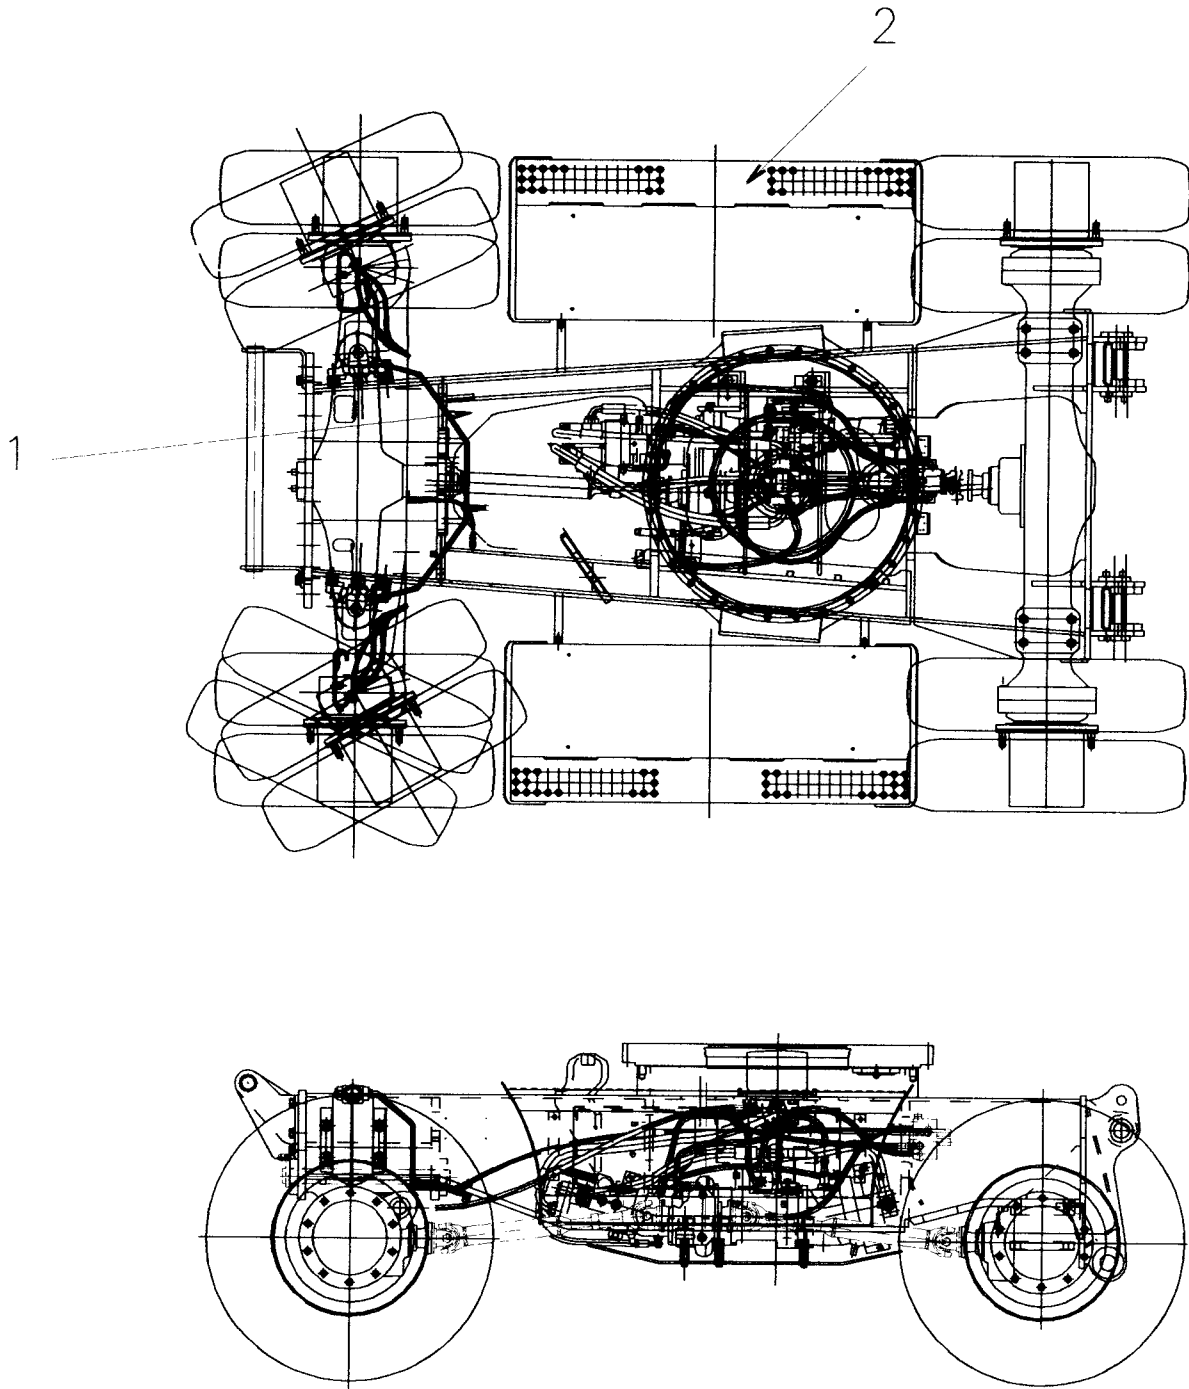

Sample of manual. Download All 707 pages at: <https://www.arepairmanual.com/downloads/komatsu-pw170es-6k-wheeled-excavator-service-repair-workshop-manual/>

- | | |
|------------------------------------|--------------------------|
| 1. Undercarriage | 6. Travel motor |
| 2. Step | 7. Transmission |
| 3. Front oscillating steering axle | 8. Double wheel assembly |
| 4. Rear axle | 9. Single wheel assembly |
| 5. Propshaft | |